

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AK67501-2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

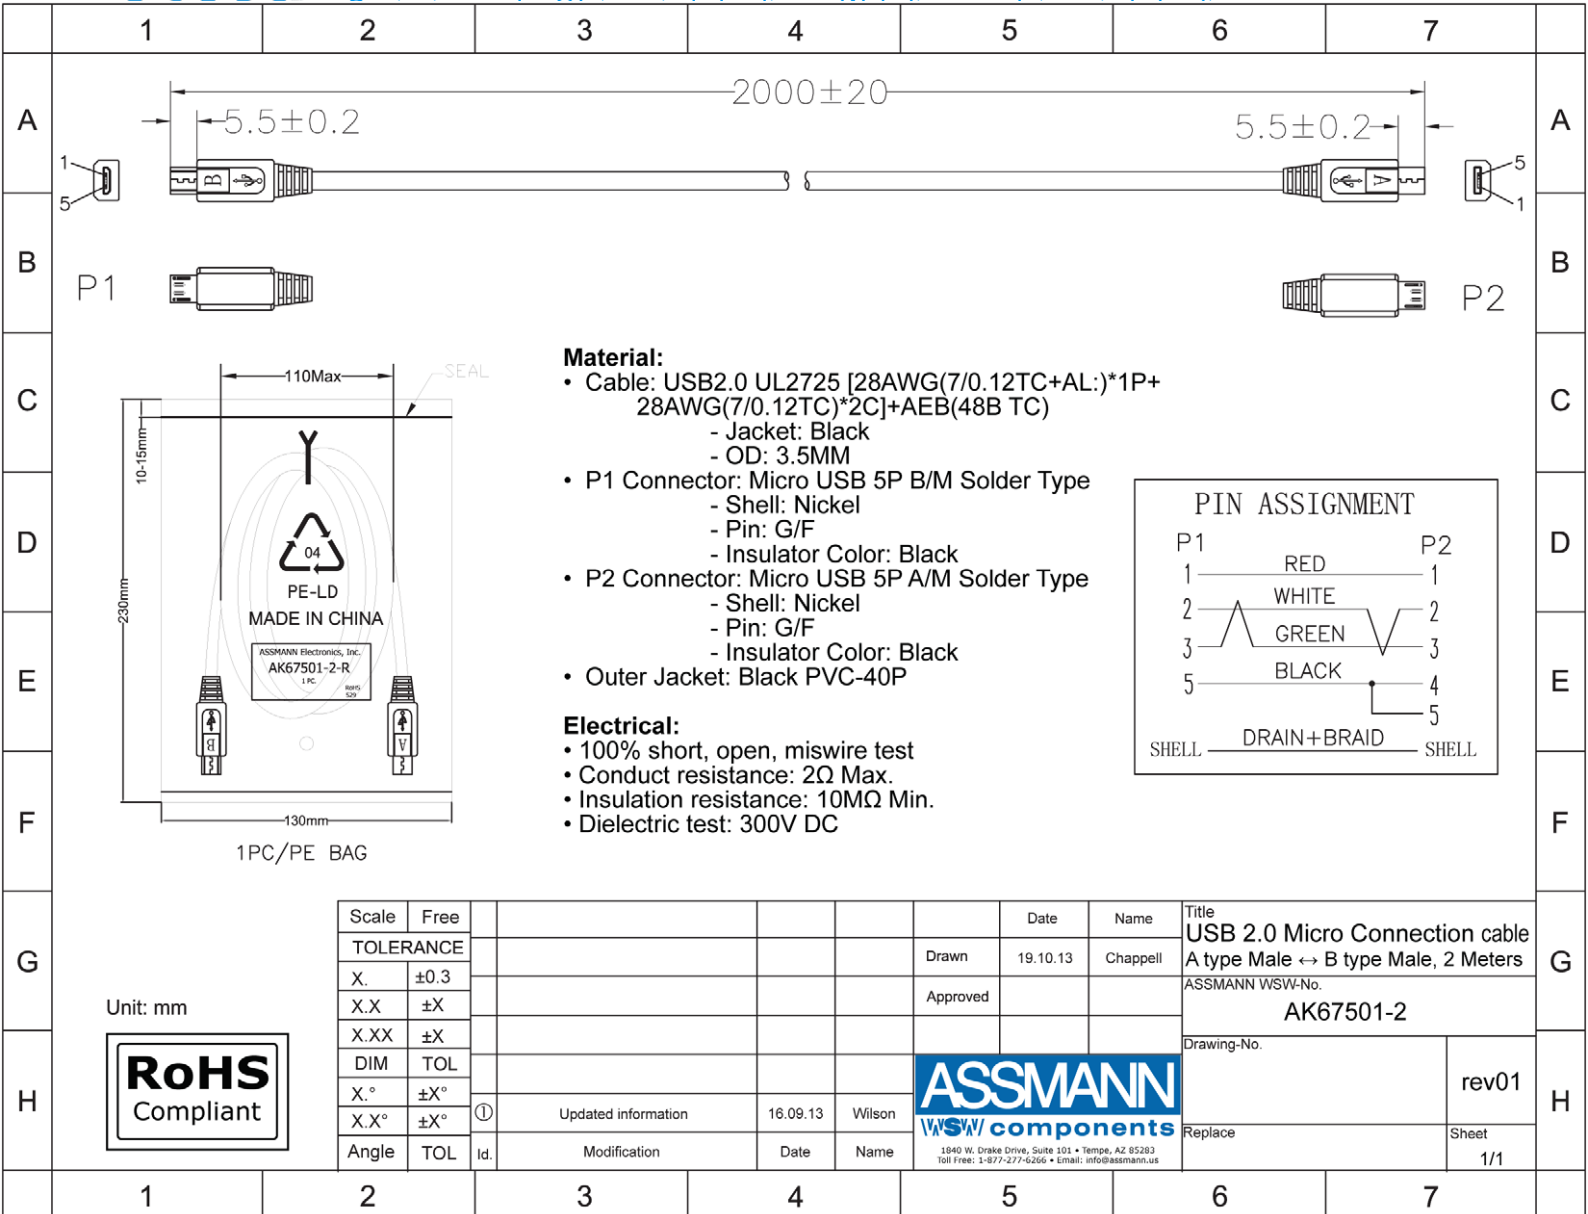

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL:)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- P1 Connector: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- P2 Connector: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-40P

PIN ASSIGNMENT			
P1			P2
1	RED		1
2	WHITE		2
3	GREEN		3
5	BLACK		4
			5
SHELL	DRAIN+BRAID		SHELL

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 10MΩ Min.
- Dielectric test: 300V DC

Scale	Free					Date	Name	Title	
TOLERANCE						Drawn	19.10.13	Chappell	USB 2.0 Micro Connection cable A type Male ↔ B type Male, 2 Meters
X.	±0.3					Approved			ASSMANN WSW-No. AK67501-2
X.X	±X								Drawing-No.
X.XX	±X								rev01
DIM	TOL								Replace
X.°	±X°	①	Updated information	16.09.13	Wilson				Sheet 1/1
X.X°	±X°		Modification	Date	Name				
Angle	TOL	Id.							



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us