

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1790649](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Extract from the online catalog

MFKDSP/ 4-5,08

Order No.: 1790649

The illustration shows the 5-pos. version

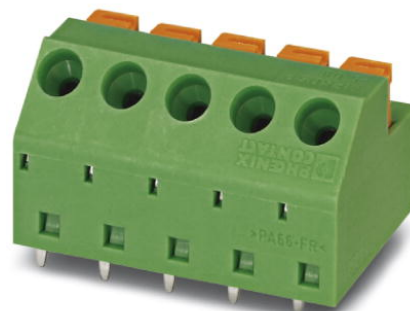

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1790649>

PC terminal block, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 4, Type of connection: Spring-cage conn., Assembly: Soldering, Conductor/PCB connection direction: 45 °, Color: green

Commercial data	
EAN	4017918044428
Pack	50 pcs.
Customs tariff	85369010
Weight/Piece	0.00468 KG
Catalog page information	Page 120 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions	
Length	16.2 mm
Pitch	5.08 mm
Dimension a	15.24 mm

MFKDSP/ 4-5,08 Order No.: 1790649

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1790649>

Number of positions	4
Pin dimensions	0,5 x 1 mm
Hole diameter	1.3 mm

Technical data

Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Nominal voltage U_N	250 V
Nominal cross section	1 mm ²
Maximum load current	12 A (with 1.5 mm ² conductor cross section)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Stripping length	10 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	0.75 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	0.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	16

MFKDSP/ 4-5,08 Order No.: 1790649

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1790649>

Certificates / Approvals



Certification

CSA, CUL, GOST, UL

CSA

Nominal voltage U_N	300 V
Nominal current I_N	10 A
AWG/kcmil	22-18

CUL

Nominal voltage U_N	300 V
Nominal current I_N	3.6 A
AWG/kcmil	22-18

UL

Nominal voltage U_N	300 V
Nominal current I_N	3.6 A
AWG/kcmil	22-18

Accessories

Item	Designation	Description
Marking		
0804303	SK 5,08/3,8: 0-9	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 12 identical decades marked 0-9, sufficient for 120 terminal blocks
0804293	SK 5,08/3,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 12 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 120 terminal blocks
0805085	SK 5,08/3,8:SO	Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 12 identical marker strips per card, max. 25-position labeling per strip, color: white
0805412	SK 5,08/3,8:UNBEDRUCKT	Marker cards, unprinted, with pitch divisions, self-adhesive, 10-section marker strips, 12 strips per card, can be labeled with the M-PEN

Plug/Adapter

0201744	MPS-MT	Metal part
---------	--------	------------

MFKDSP/ 4-5,08 Order No.: 1790649

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1790649>


0201647

RPS


Reducing plug, Color: gray

Diagrams/Drawings

Drilling plan/solder pad geometry

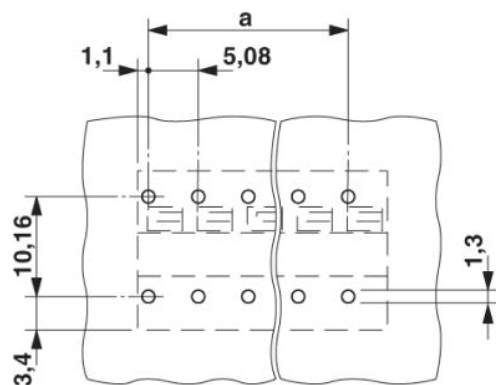

Dimensioned drawing

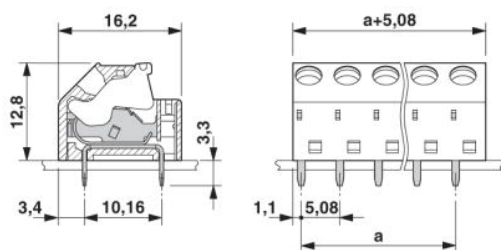

MFKDSP/ 4-5,08 Order No.: 1790649

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1790649>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;