

## Excellent Integrated System Limited

Stocking Distributor

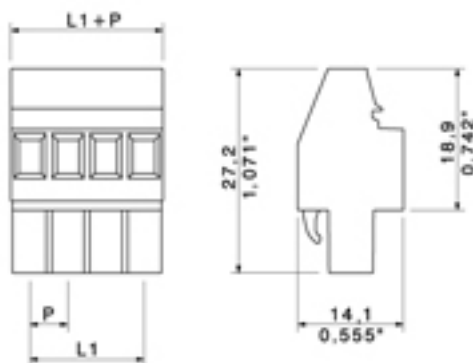
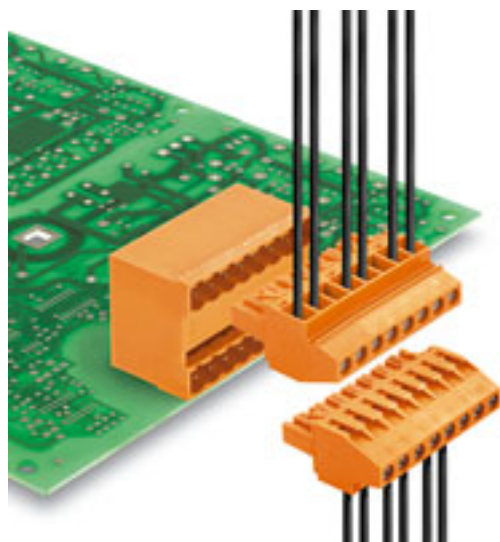
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1958930000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZP 5.00-5.08/90/270 | BLZP 5.00/270 SN


**General ordering data**

|                  |  |
|------------------|--|
| Order No.        | 1958930000   |
| Part designation | BLZP 5.00/19/270 SN BK BX  |
| Version          | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 19, 90°, Box |
| EAN              | 4032248637867  |
| Qty.             | 18 pc(s).  |
| Packaging        | Box  |

**System parameters**

|   |                          |
|---|--------------------------|
| Conductor connection system                 | Clamping yoke connection |
| Outgoing direction of conductor             | 90°                      |
| Pitch in mm                                 | 5 mm                     |
| Pitch in inch                               | 0.197 inch               |
| No. of poles                                | 19                       |
| No. of rows                                 | 1                        |
| Screwdriver blade                           | 0.6 x 3.5                |
| Screwdriver blade standard                  | DIN 5264                 |
| Tightening torque, min.                     | 0.4 Nm                   |
| Tightening torque, max.                     | 0.5 Nm                   |
| Clamping screw                              | M 2.5                    |
| Stripping length                            | 7 mm                     |
| L1 in mm                                    | 90 mm                    |
| L1 in inch                                  | 3.543 inch               |
| Electric shock protection to DIN VDE 57 106 | Safe from finger touch   |

**Material data**

|                          |              |
|--------------------------|--------------|
| Insulating material      | PBT          |
| Colour                   | black        |
| Flammability class UL 94 | V-0          |
| CTI                      | >= 200       |
| Contact material         | Copper alloy |
| Contact surface          | tinned       |
| Contact base material    | Copper alloy |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) |  
 Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZP 5.00-5.08/90/270 | BLZP 5.00/270 SN

#### Material data

##### Connectable conductors

|   |                      |
|---|----------------------|
| Clamping range, min.                              | 0.13 mm <sup>2</sup> |
| Clamping range, max.                              | 4 mm <sup>2</sup>    |
| Conductor connection cross-section AWG, min.      | AWG 26               |
| Conductor connection cross-section AWG, max.      | AWG 12               |
| Solid, min. H05(07) V-U                           | 0.2 mm <sup>2</sup>  |
| Solid, max. H05(07) V-U                           | 4 mm <sup>2</sup>    |
| Flexible, min. H05(07) V-K                        | 0.2 mm <sup>2</sup>  |
| Flexible, max. H05(07) V-K                        | 4 mm <sup>2</sup>    |
| w. wire end ferrule, DIN 46228 pt 1, min          | 0.2 mm <sup>2</sup>  |
| with wire end ferrule, DIN 46228 pt 1, max.       | 4 mm <sup>2</sup>    |
| w. plastic collar ferrule, DIN 46228 pt 4, min.   | 0.2 mm <sup>2</sup>  |
| with plastic collar ferrule, DIN 46228 pt 4, max. | 2.5 mm <sup>2</sup>  |
| Gauge to EN 60999 a x b; ø                        | 2.8 mm x 2.4 mm      |

##### DIN IEC rating data

|  |                   |
|--|-------------------|
| Rated current, min. No. of poles (Tu=20°C)                                     | 15.5 A            |
| Rated current, max. No. of poles (Tu=20°C)                                     | 13 A              |
| Rated current, no. of poles (Tu=40°C), min.                                    | 12 A              |
| Rated current, no. of poles (Tu=40°C), max.                                    | 10.5 A            |
| Rated voltage for overvoltage class/pollution severity II/2                    | 400 V             |
| Rated voltage for overvoltage class/pollution severity III/2                   | 320 V             |
| Rated voltage at overvoltage category/pollution degree III/3                   | 250 V             |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2  | 4 kV              |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 4 kV              |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 4 kV              |
| Short-time withstand current resistance  | 3 x 1s with 120 A |

##### CSA rating data

|                               |        |
|-------------------------------|--------|
| Rated voltage (Use group B)   | 300 V  |
| Rated current (use group B)   | 10 A   |
| Rated voltage (Use group C)   | 50 V   |
| Rated voltage (use group D)   | 300 V  |
| Rated current (use group D)   | 10 A   |
| Wire cross-section, AWG, min. | AWG 26 |
| Wire cross-section, AWG, max. | AWG 12 |

##### UL 1059 rating data

|                               |        |
|-------------------------------|--------|
| Rated voltage (use group B)   | 300 V  |
| Rated current (use group B)   | 10 A   |
| Rated voltage (use group C)   | 50 V   |
| Rated voltage                 | 300 V  |
| Rated current                 | 10 A   |
| Wire cross-section, AWG, min. | AWG 26 |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZP 5.00-5.08/90/270 | BLZP 5.00/270 SN

#### UL 1059 rating data

Wire cross-section, AWG, max. AWG 12

#### Approvals

Approvals institutes CURUS

#### Classifications

eClass 6.0 27-26-07-08

#### Notes

Notes

### Similar products

| Order No.  | Part designation          | Version  |
|------------|---------------------------|--|
| 1958870000 | BLZP 5.00/02/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 2, 90°, Box  |
| 1958860000 | BLZP 5.00/03/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 3, 90°, Box  |
| 1958850000 | BLZP 5.00/04/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 4, 90°, Box  |
| 1958840000 | BLZP 5.00/05/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 5, 90°, Box  |
| 1958830000 | BLZP 5.00/06/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 6, 90°, Box  |
| 1958820000 | BLZP 5.00/07/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 7, 90°, Box  |
| 1958810000 | BLZP 5.00/08/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 8, 90°, Box  |
| 1958800000 | BLZP 5.00/09/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 9, 90°, Box  |
| 1958790000 | BLZP 5.00/10/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 10, 90°, Box |
| 1958780000 | BLZP 5.00/11/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 11, 90°, Box |
| 1959150000 | BLZP 5.00/12/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 12, 90°, Box |
| 1958770000 | BLZP 5.00/13/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 13, 90°, Box |
| 1958760000 | BLZP 5.00/14/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 14, 90°, Box |
| 1958750000 | BLZP 5.00/15/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 15, 90°, Box |
| 1958740000 | BLZP 5.00/16/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 16, 90°, Box |
| 1958730000 | BLZP 5.00/17/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 17, 90°, Box |
| 1958720000 | BLZP 5.00/18/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 18, 90°, Box |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZP 5.00-5.08/90/270 | BLZP 5.00/270 SN

|            |                           |  |
|------------|---------------------------|--|
| 1958710000 | BLZP 5.00/19/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 19, 90°, Box |
| 1958700000 | BLZP 5.00/20/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 20, 90°, Box |
| 1958690000 | BLZP 5.00/21/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 21, 90°, Box |
| 1958680000 | BLZP 5.00/22/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 22, 90°, Box |
| 1958670000 | BLZP 5.00/23/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 23, 90°, Box |
| 1958660000 | BLZP 5.00/24/270 SN OR BX | PCB plug-in connector, Clamping yoke connection, Clamping range, max.: 4 mm <sup>2</sup> , Pitch in mm: 5 mm, No. of poles: 24, 90°, Box |