

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Würth Electronics Midcom](#)
[760871632](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


Spezifikation für Freigabe / specification for release

Kunde / customer : **Preliminary**
 Artikelnummer / part number : **760871632**
 Bezeichnung : **Netzteil-Übertrager WE-UNIT**
 description : **Offline-transformer WE-UNIT**



DATUM / DATE : 2009-07-08

A Mechanische Abmessungen / dimensions :

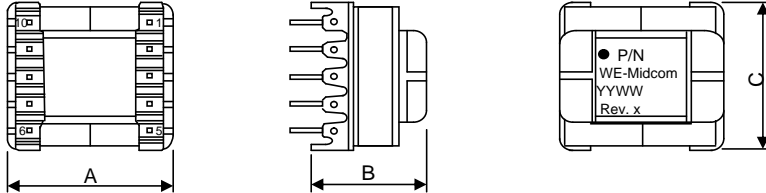


	EE25	
A	29.21 max.	mm
B	21.59 max.	mm
C	27.94 max.	mm
D		mm
E		mm

● = Marking Pin 1

B Elektrische Eigenschaften / electrical properties :

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Induktivität / inductance	10 kHz / 0,1 V	L_0	4.0	mH	$\pm 10\%$
Windungszahlverhältnis / turns ratio	N1 : N2 : N3 : N4	TR	14.33:1:0.75:3		$\pm 3\%$
DC-Widerstand N1 / DC-resistance N1	@ 20°C	R_{DC1}	4.1	Ω	max.
DC-Widerstand N2 / DC-resistance N2	@ 20°C	R_{DC2}	61	m Ω	max.
DC-Widerstand N3 / DC-resistance N3	@ 20°C	R_{DC3}	51	m Ω	max.
DC-Widerstand N4 / DC-resistance N4	@ 20°C	R_{DC4}	3.35	Ω	max.
Streuinduktivität / leakage inductance	100 kHz / 0,1V N2, N3, N4 shorted	L_s	70	μ H	max.
Hochspannung / hipot test	3mA, 1min. N1, N4 => N2, N3	HV	4.0	kV	
Hochspannung / hipot test	3mA, 1min. N1 => N4	HV	1.5	kV	

C Lötpad / soldering spec. :



D Prüfgeräte / test equipment :

WK3260B für / for L und / and R

E Testbedingungen / test conditions :

Luftfeuchtigkeit / humidity: 33%
 Umgebungstemperatur / temperature: +20°C

F Werkstoffe & Zulassungen / material & approvals :

Basismaterial / base material: Ferrit/ ferrite
 Spulenkörper / Bobbin: UL-V0
 Draht / wire: 2UEW-F 155°C / TCA3
 Kontaktmaterial / contact plating: Cu-Ni-Sn
 Tränklack / Varnish: Dolph BC346A or equiv.

G Eigenschaften / general specifications :

Betriebstemp. / operating temperature: -40°C - + 125°C
 Umgebungstemp. / ambient temperature: -40°C - + 75°C
 It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.
 Schaltfrequenz / Switching frequency: 100 kHz



Bauteil für Netzanwendung / Off-line transformer

Freigabe erteilt / general release:	Kunde / customer		
Datum / date	Unterschrift / signature		
	Würth Elektronik		
Geprüft / checked	Kontrolliert / approved		
	TBr	Rev. 00	2009-07-08
	Name	Änderung / modification	Datum / date

Würth Elektronik eiSos GmbH & Co.KG

Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number : **760871632**


Bezeichnung : **Netzteil-Übertrager WE-UNIT**
 description : **Offline-transformer WE-UNIT**



WÜRTH ELEKTRONIK

DATUM / DATE : 2009-07-08

H Schaltbild / Schematics

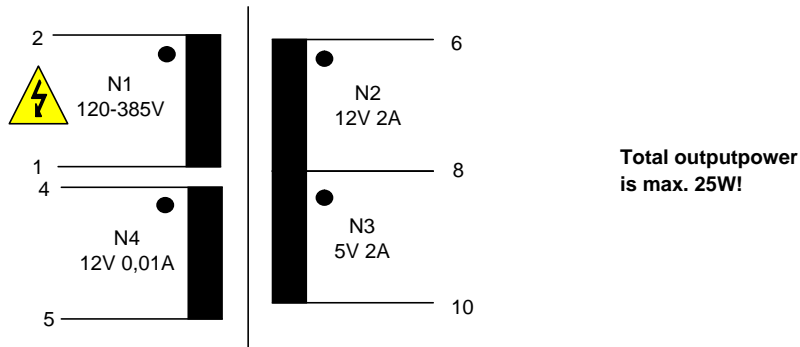

Freigabe erteilt / general release:	Kunde / customer		
..... Datum / date Unterschrift / signature		
	Würth Elektronik		
..... Geprüft / checked Kontrolliert / approved		
	TBr	Rev. 00	2009-07-08
	Name	Änderung / modification	Datum / date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co.KG

D-74638 Waldenburg · Max-Eyth-Straße 1 · 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.com>