

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1762819](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



Extract from the online catalog

PCV 35 HC/ 4-GF-15,00

Order No.: 1762819

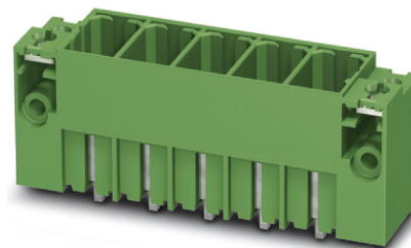

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1762819>

Header, Nominal current: 125 A, Nom. voltage: 1000 V, Pitch: 15 mm,
Number of positions: 4, Color: green, Assembly: Soldering

Commercial data

EAN	4046356444071
Pack	25 pcs.
Customs tariff	85366990
Weight/Piece	0.085552 KG
Catalog page information	Page 443 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
08/19/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	15 mm
Dimension a	45 mm
Number of positions	4
Pin spacing	15 mm

PCV 35 HC/ 4-GF-15,00 Order No.: 1762819


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1762819>

Technical data


Insulating material group	IIIa
Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Nominal current I_N	125 A
Nominal voltage U_N	1000 V
Maximum load current	125 A
Insulating material	PBT
Inflammability class acc. to UL 94	V0

Diagrams/Drawings

Drilling plan/solder pad geometry

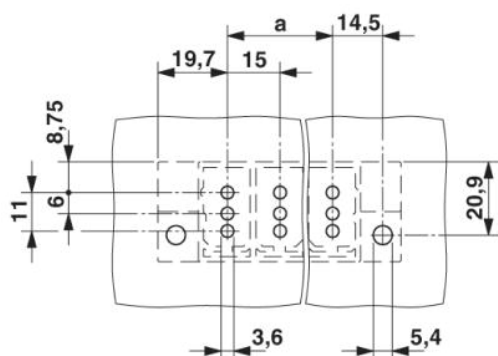

Dimensioned drawing

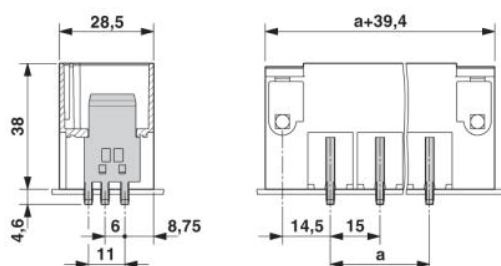

PCV 35 HC/ 4-GF-15,00 Order No.: 1762819

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1762819>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;