

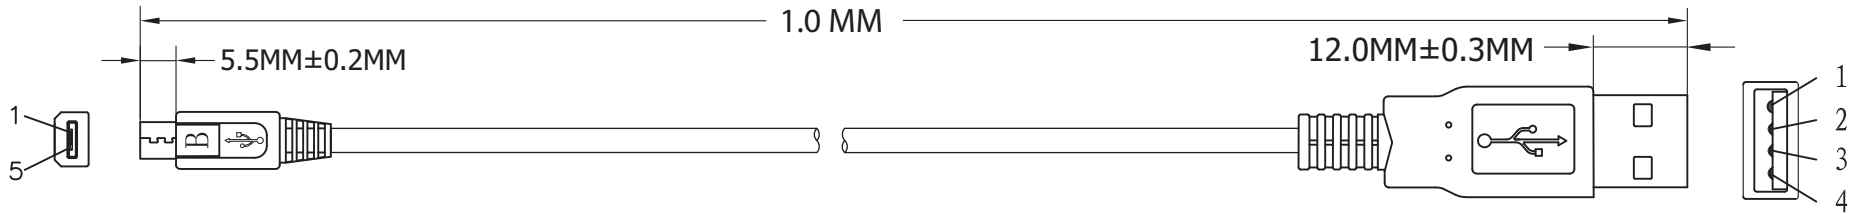


P2

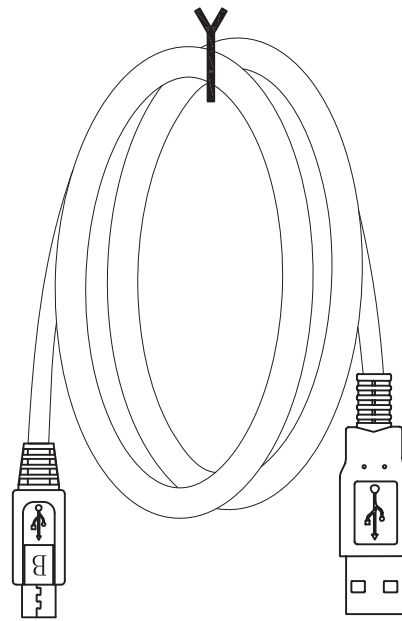

P1



Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+ 28 AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- P1 Connector: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
 - Outer Jacket: Black PVC-50P
- P2 Connector: USB A Male
 - Shell: Nickel
 - Pin: G/F
 - 3PCS Type
 - Insulator Color: White
 - Outer Jacket: Black PVC-40P

PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	4	
SHELL DRAIN + BRAID		SHELL	

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5Ω Min.
- Hi-Pot test: 300V DC



Scale	1:1						Name	Item No.
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
Modification				Date	Name			

AK67421-1-R	
Title USB2.0 Micro Connection Cable, 1 Meter USB B Micro Male <=> USB A Male	
Drawing No.	
Replace	rev00
Sheet	