

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Wurth Electronics Midcom](#)
[750110007](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

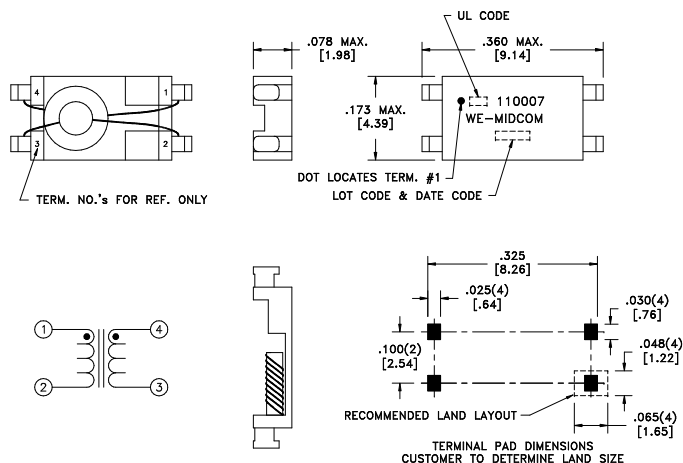

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.350 ohms max.
D.C. RESISTANCE	3-4 @20°C	0.350 ohms max.
INDUCTANCE	1-2 10kHz, 100mVAC, Ls	30uH min.
DIELECTRIC	1-4 3750VAC, 1 second	3000VAC, 1 minute
URNS RATIO	(4-3):(1-2)	1.67:1, ±1%
SURGE TEST	6kV Peak	1.2 x 50uS

GENERAL SPECIFICATIONS:

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Supplementary insulation for a primary circuit at a working voltage of 250Vrms.

REV.	DATE
6B	10/09
6A	9/07

AGENCY NUMBER	
UL CODE FILE# E205930	BB

Packaging Specifications Method: Tape & Reel PKG-0748 www.midcom-inc.com	GB Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [$\pm .13$] Fractions: $\pm 1/64$ Footprint: $\pm .005$ [$\pm .13$] This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	DRAWING TITLE TRANSFORMER eiSos p/n: 750110007	 REVISIONS: SEE SHEET 1	DRAWING NO. 750110007 SCALE --- SHEET 2 OF 6
---	--	--	---	--