

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AK3750XF-R](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

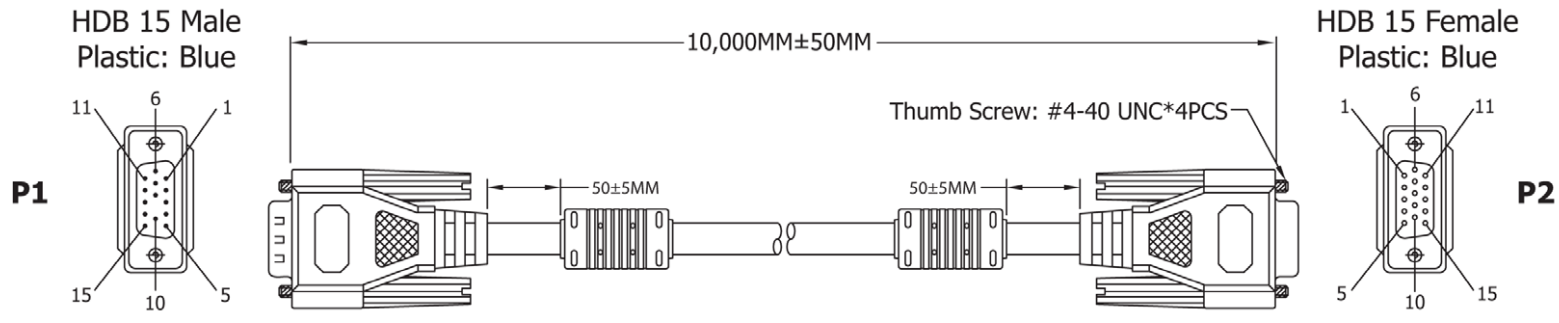

PIN OUT			
P1	P2	P1	P2
1	1	10	10
6	6	11	11
2	2	12	12
7	7	13	13
3	3	14	14
8	8	SHELL	BRAID
4	4	CENTER	SHELL
5	5	SHIELDING	

**Material:**

- CABLE: 28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE INNER JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)\*7C+ INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE,OD:Ø8.5± 0.15mm UL-2919
- CONNECTOR:  
 P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)  
 P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
- FERRITE CORE:17.5\*28.5\*9.5mm
- SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRONIC TEST: <1>.100% OPEN SHORT & MIS WIRE TEST  
 <2>.CONTACT RESISTANCE 3 OHMS MAX  
 <3>.INSULATION RESISTANCE 20M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING  
 (HANKING SIZE MUST BE SMALLER THAN PACKING)  
 PACKING TYPF· DB VP4

⊕ = Assmann logo



ITEM NO.	<b>AK3750XF</b>
TITLE	Premium XGA Monitor Extension Cable - 10 Meters w/Ferrite core, HD D-Sub 15-pin Male <=> Female

**ASSMANN**  
 Electronics, Inc.  
 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 ©Copyright 2010 by Assmann Electronic Components  
 All International Rights Reserved