

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AK3780-10-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

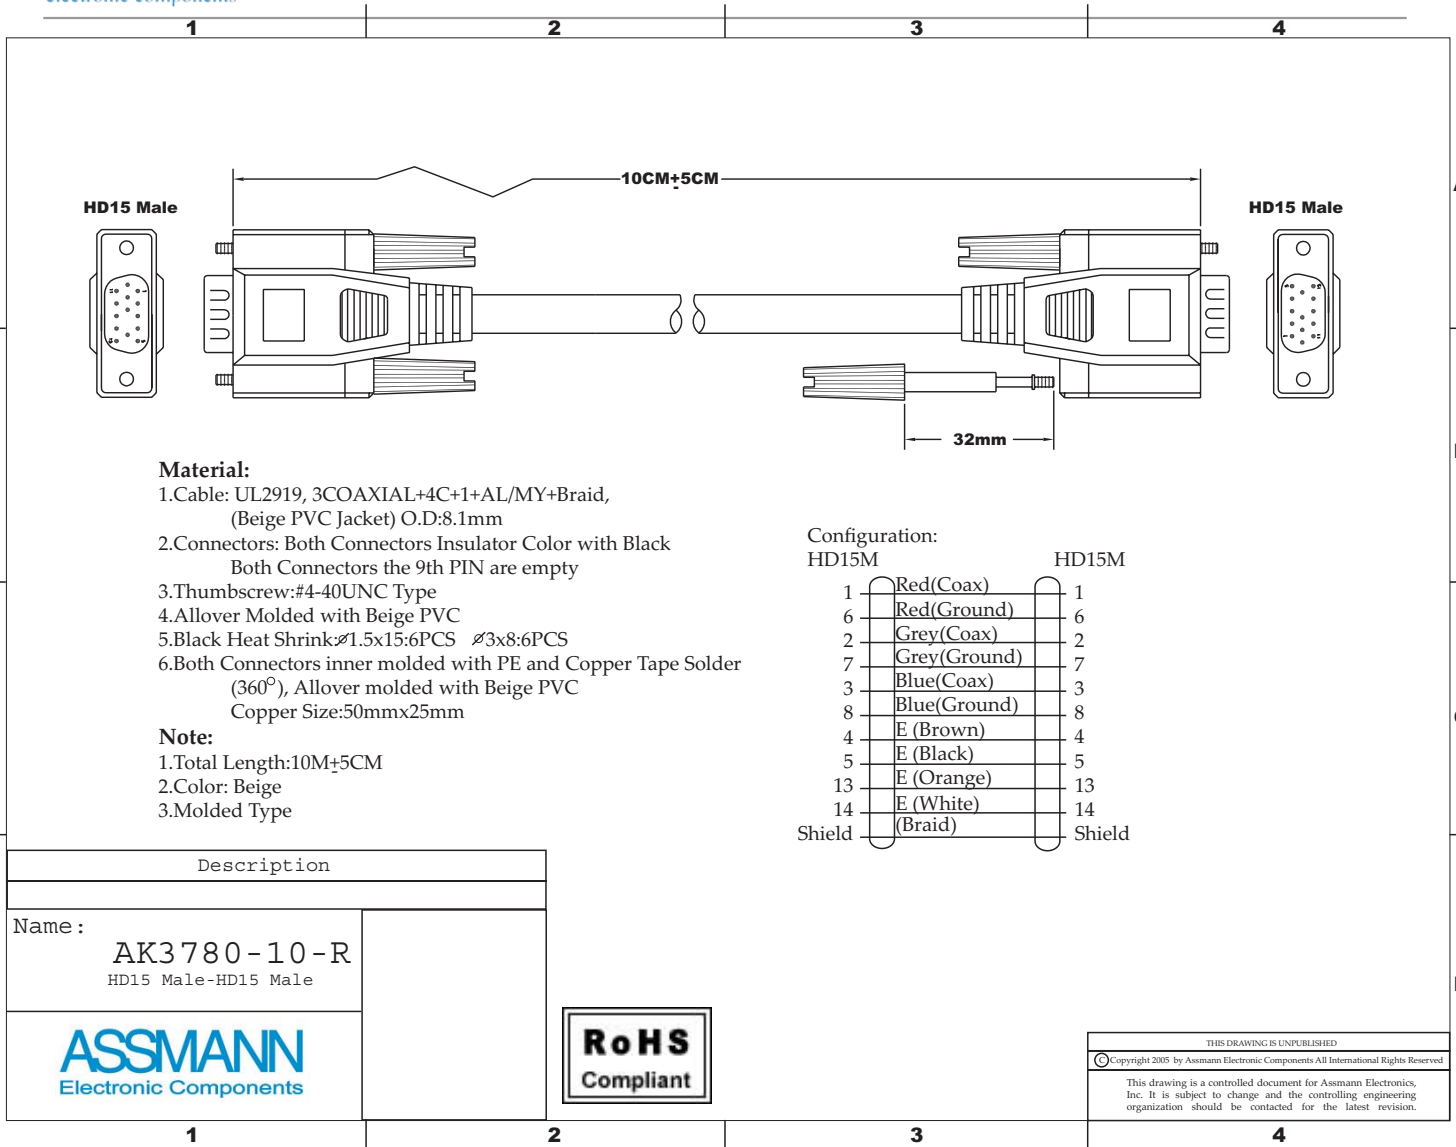

Material:

- 1.Cable: UL2919, 3COAXIAL+4C+1+AL/MY+Braid, (Beige PVC Jacket) O.D:8.1mm
- 2.Connectors: Both Connectors Insulator Color with Black
Both Connectors the 9th PIN are empty
- 3.Thumbscrew:#4-40UNC Type
- 4.Allover Molded with Beige PVC
- 5.Black Heat Shrink:∅1.5x15:6PCS ∅3x8:6PCS
- 6.Both Connectors inner molded with PE and Copper Tape Solder (360°), Allover molded with Beige PVC
Copper Size:50mmx25mm

Note:

- 1.Total Length:10M±5CM
- 2.Color: Beige
- 3.Molded Type

Configuration:

HD15M		HD15M
1	Red(Coax)	1
6	Red(Ground)	6
2	Grey(Coax)	2
7	Grey(Ground)	7
3	Blue(Coax)	3
8	Blue(Ground)	8
4	E (Brown)	4
5	E (Black)	5
13	E (Orange)	13
14	E (White)	14
Shield	(Braid)	Shield

Description	
Name :	AK3780-10-R HD15 Male-HD15 Male



THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.