

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)



[AK3760X-3-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


HDB 15 Male
 Plastic: Blue

P1

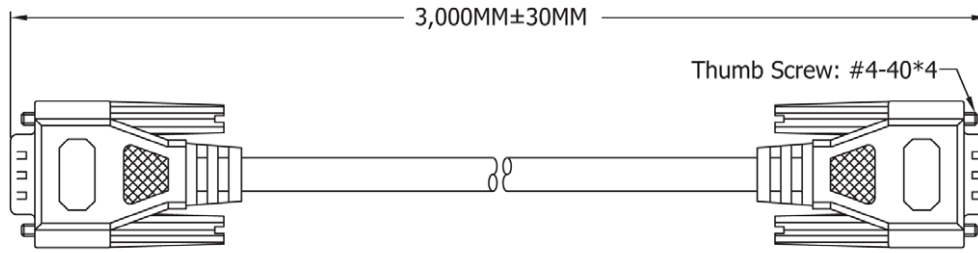


HDB 15 Male
 Plastic: Blue

P2



PIN OUT

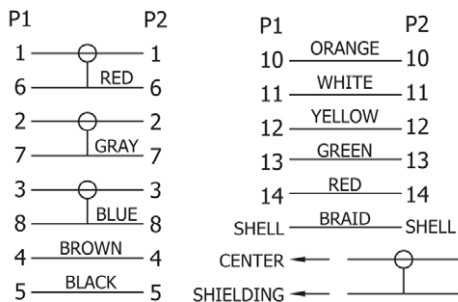

Material:

- CABLE: 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
 JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*7C+
 INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
 WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
 COLOR:BEIGE, OD:Ø8.5± 0.15mm UL-2919
- CONNECTOR:
 P1&P2:HDB 15P MALE,THE 9TH PIN IS EMPTY GOLD FLASH CONTACT,
 NICKEL PLATED SHELL
- SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRONIC TEST:
 <1>.100% OPEN SHORT & MIS WIRE TEST
 <2>.CONTACT RESISTANCE 30HMS MAX
 <3>.INSULATION RESISTANCE 20MOHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING
 (HANKING SIZE MUST BE SMALLER THAN PACKING)
 PACKING TYPE: DB VP4.

Ⓜ = Assmann logo



ITEM NO.

AK3760X-3

TITLE Premium XGA Monitor Connection cable -
 HD D-Sub 15-pin Male <=> Male, 3 Meters

ASSMANN
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 ©Copyright 2010 by Assmann Electronic Components
 All International Rights Reserved