

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Taoglas Limited](#)
[AP.25B.07.0052A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Specification

SPECIFICATION

- Part No. : **AP.25B.07.0052A**
- Product Name : **25mm One Stage GPS Active Patch Antenna Module**
- Features : 35mm*35mm*4.50mm (Ground Plane)
 52mm Ø1.13 I-PEX MHFI (U.FL)
 15dB LNA
 1.8V/3.0V/5.0V
 ROHS Compliant
- Photo :



REVISION STATUS

Version	Date	Page	Revision Description	Prepared	Approved
01	May 11 th 2007	All	New format	TW Product Centre	Ronan Quinlan
02	Oct 13 th 2009	All	New format Voltage range increased	Ireland	Dermot O'Shea



Specification

1.0 Introduction

Designed for embedded (inside device) integration with GPS receiver modules, the AP.25B combines a 25*25*2mm advanced low profile ceramic patch antenna with a one stage LNA and ultra thin coaxial cable. The Ground Plane size of 35*35mm gives this solution a performance increase in gain of 1~2dB. It also helps shields the patch antenna from noise. Taoglas active antenna modules utilise XtremeGain™ technology for the highest sensitivity in the industry.

The AP.25B has been optimized for telematics, asset tracking, navigation, and remote monitoring applications or simply any GPS device that requires high performance and needs quick, reliable and consistent lock. It has been designed to sit directly above the main board adhered to the underside of the plastic housing. The is a constant Voltage Regulator built into the LNA integrated circuit this allows any device using the AP.25B to benefit from Lower Power Consumption.

2.0 Specification

Patch Antenna

Frequency	1575.42 ± 1.023MHz
Antenna Gain	90°: 2.0 dBi Min. 20°: -5.0 dBi Min Mounted on a 60*60mm Ground Plane
Polarization	RHCP
Axialration	90°: 4.0 dBi Max. Mounted on a 60*60mm Ground Plane
Patch Dimension	25mm x 25mm x 2mm

LNA

Frequency	1575.42 ± 1.023MHz
Gain	Typ. 15dB ± 2.5dB (+25°C±5°C)
Output Impedance	50 Ω
Noise Figure	Max 1.5dB (+25°C±5°C) Max: 2.2dB (+85°C)
Output VSWR	2.0 Max

the antenna solutions provider

taoglas



Specification

Cable* & Connector

RF Cable	Coaxial Cable ϕ 1.13 \pm 0.1mm, length 52 \pm 3.0mm
Connector	Ipex MHFI (U.FL)

Dimensions

Dimensions	35*35*4.50mm
Weight	12.3g (typ)


Total Specification

Frequency	1575.42 \pm 5MHz
Gain	90°: 17 \pm 4.5dBi
Output Impedance	50 Ω
Polarization	RHCP
Output VSWR	Max 2.0
Operation Temperature	-40°C to + 85°C
Storage Temperature	-40°C to + 100°C
Relative Humidity	40% to 95%
Input Voltage	1.8V/3.0V/5.0V Max: 5.0V
Current	Typ. 3.8mA at 3v



Specification


3.0 Technical Drawing

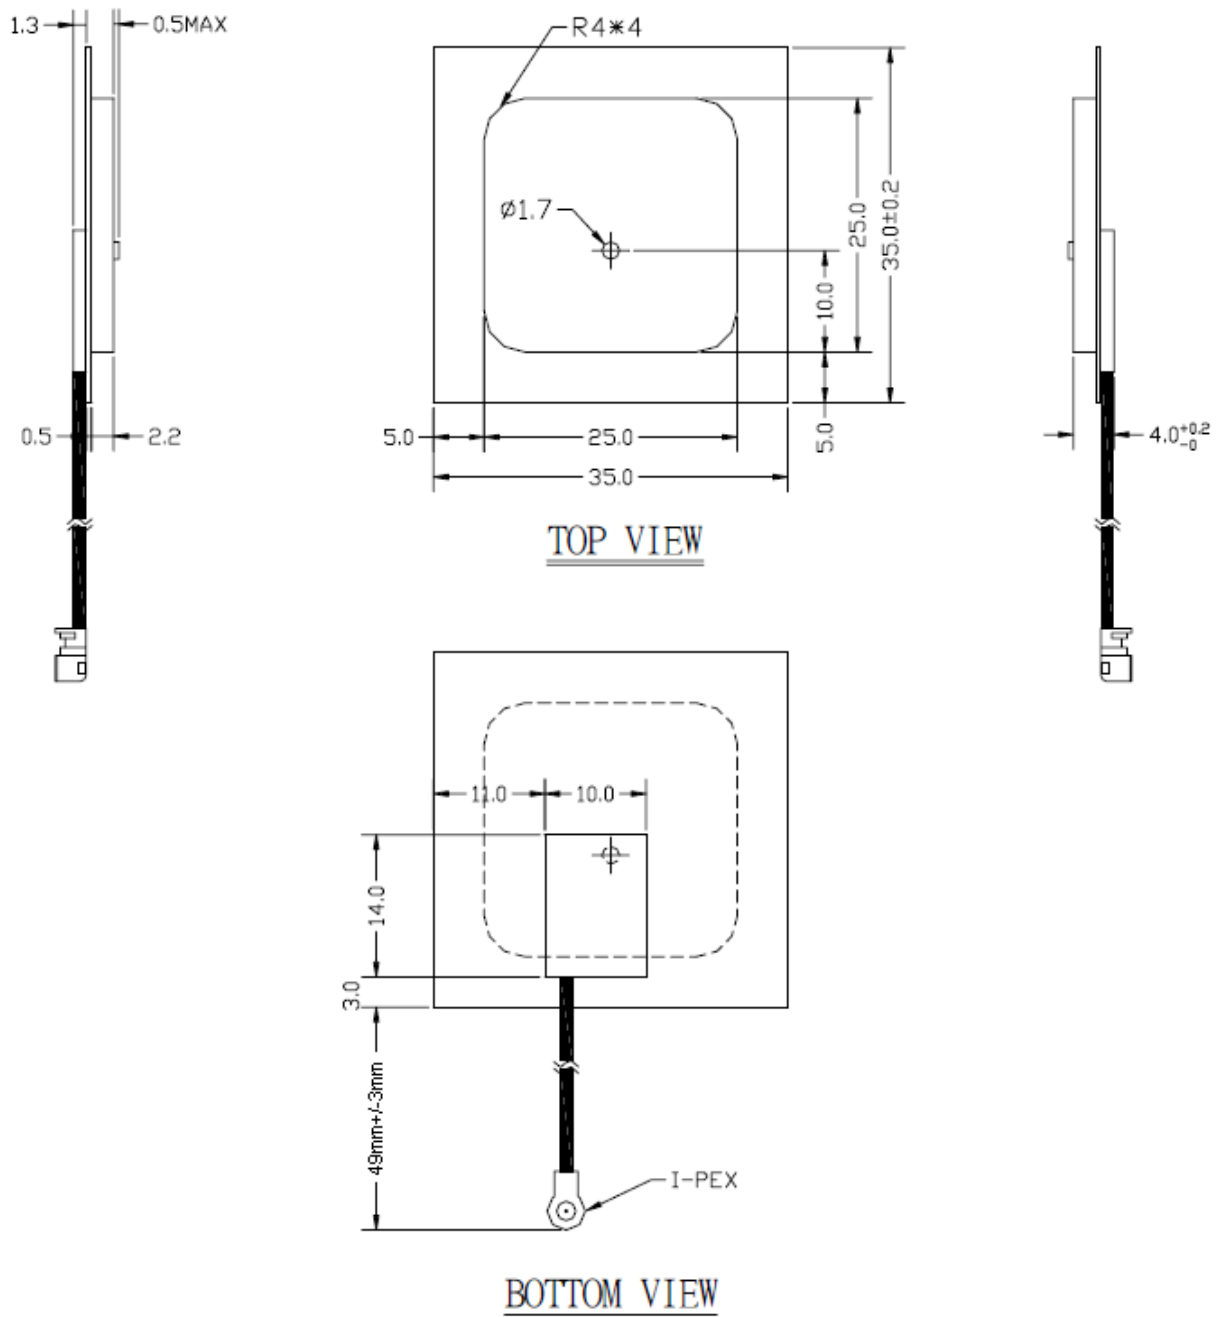




Specification

S21 – Gain – Input Voltage 1.8V

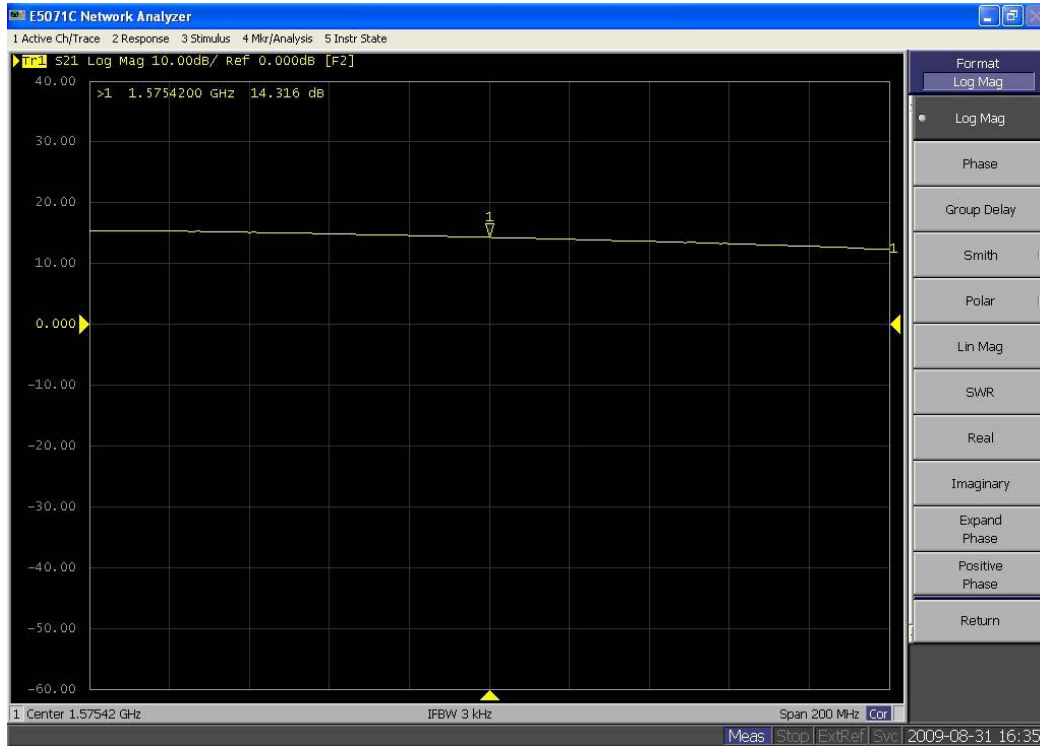


Noise Figure Meter – 1.8V

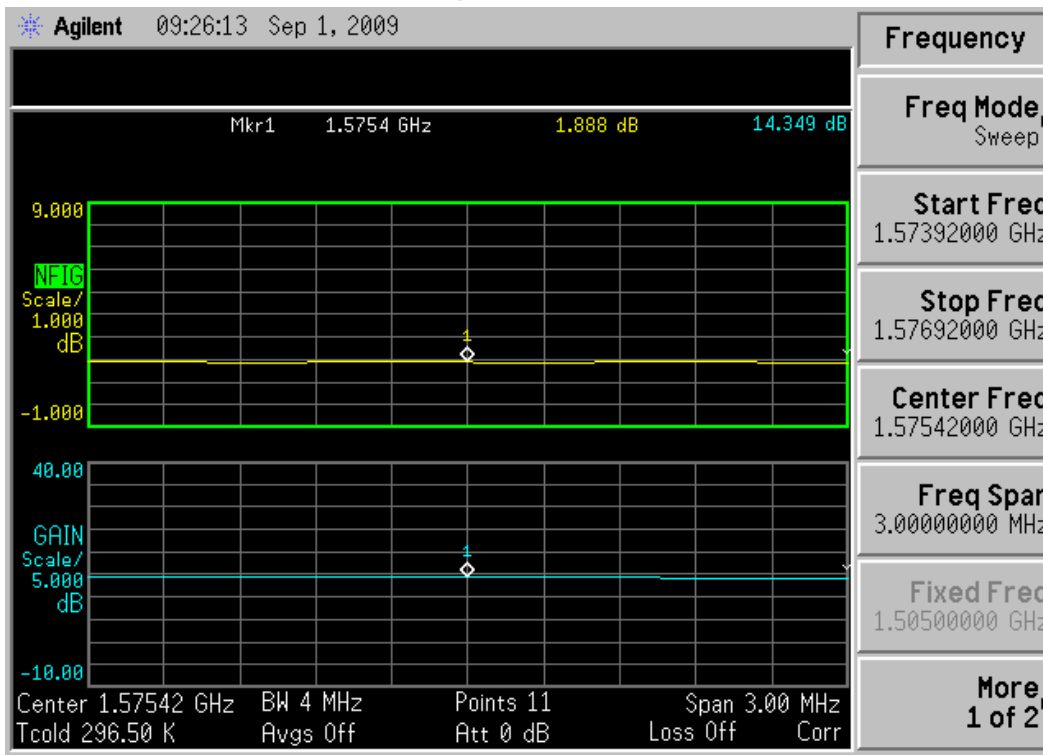




Specification

S21 – Gain – Input Voltage 3V

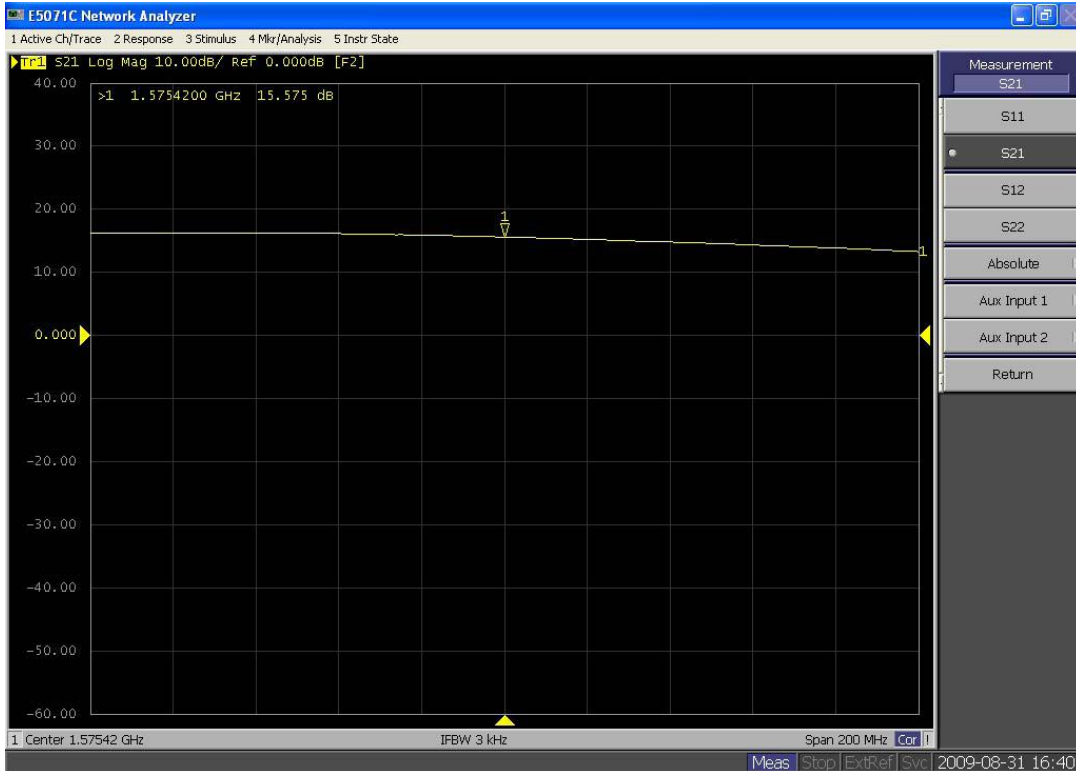

Noise Figure Meter – 3V

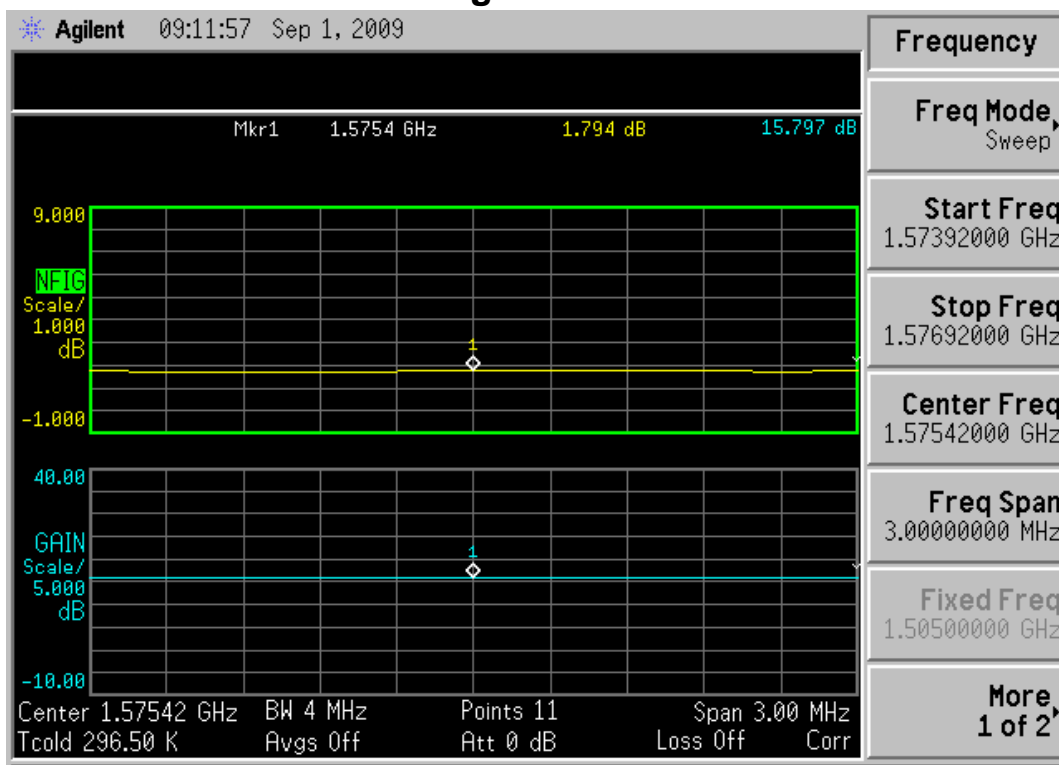


the antenna solutions provider

taoglas



Specification

S21 – Gain – Input Voltage 5V

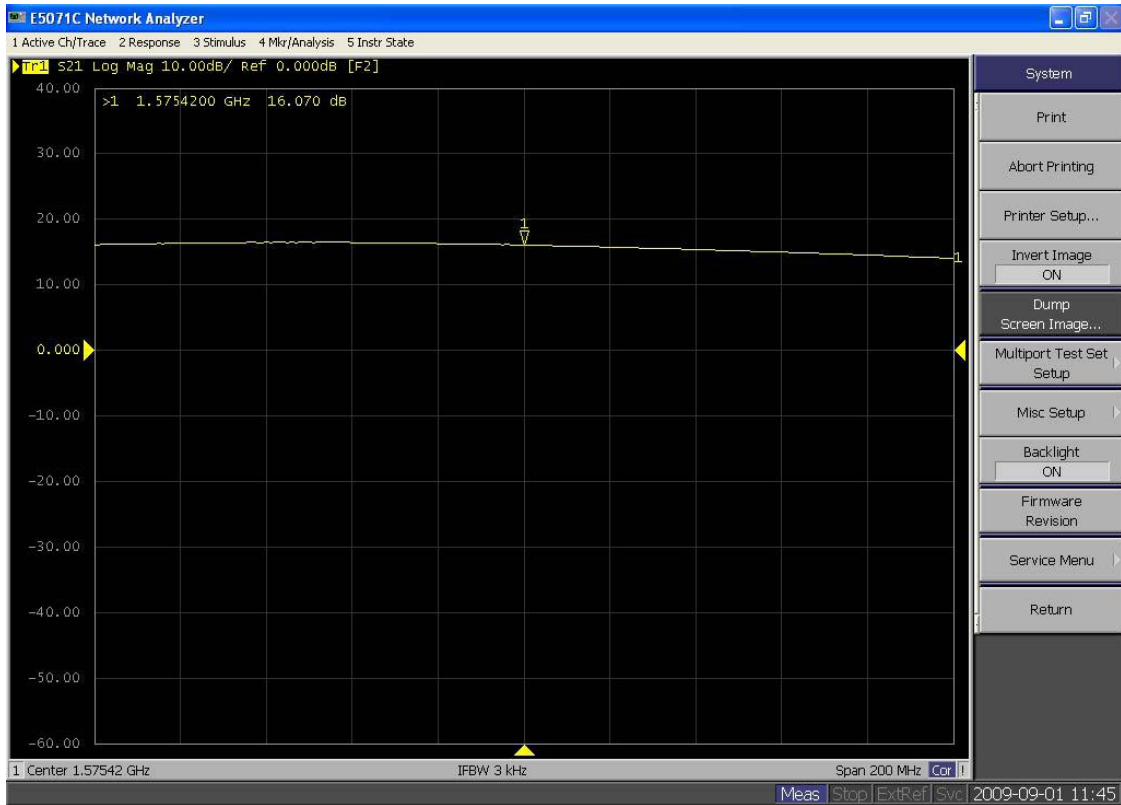

Noise Figure Meter – 5V

