

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Dialight](#)
[5682232806F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	ALV	MES		

LED COLOR			
POSITION 1	POSITION 2	POSITION 3	POSITION 4
GREEN NON-DIFFUSED	GREEN NON-DIFFUSED	GREEN NON-DIFFUSED	GREEN NON-DIFFUSED

CHARACTERISTICS AT 25°C AMBIENT			
TYP	MAX	UNITS	TEST CONDITIONS
50		mc/d	I = 10 mA
2.1	2.8	V	I = 20 mA
100		µA	V _R = 5 V
565		nm	
45		Degree	
35		pf	V _f = 0, f = 1 MHz

25 °C AMBIENT		
CHARACTERISTICS	VALUES	UNITS
	100	mW
	0.4	mA/°C
	30	mA
	120	mA
	260	°C
	5	V
	-55 TO 100	°C
	-55 TO 100	°C




SPACED AS PER HOLE PATTERN FORMATION AFTER BENDING AND CUTTING DOWN ARE MEASURED AT HOUSING EXIT

IT IS IN COMPLIANCE WITH THE DIRECTIVE. EACH BAG IS MARKED WITH L P/N 9100-117-0832-99 OR EQUIVALENT 568-2232-806F
 ELECTROSTATIC DISCHARGE SENSITIVE IN ALL PRECAUTIONARY MEASURES DURING STORAGE IN ACCORDANCE WITH IPC-A-610.

568-2232-806F

with "RoHS Compliant" label or soldered, dip soldered or typical lead-free soldering temp. for 5 sec.

HOLE PATTERN GAUGE

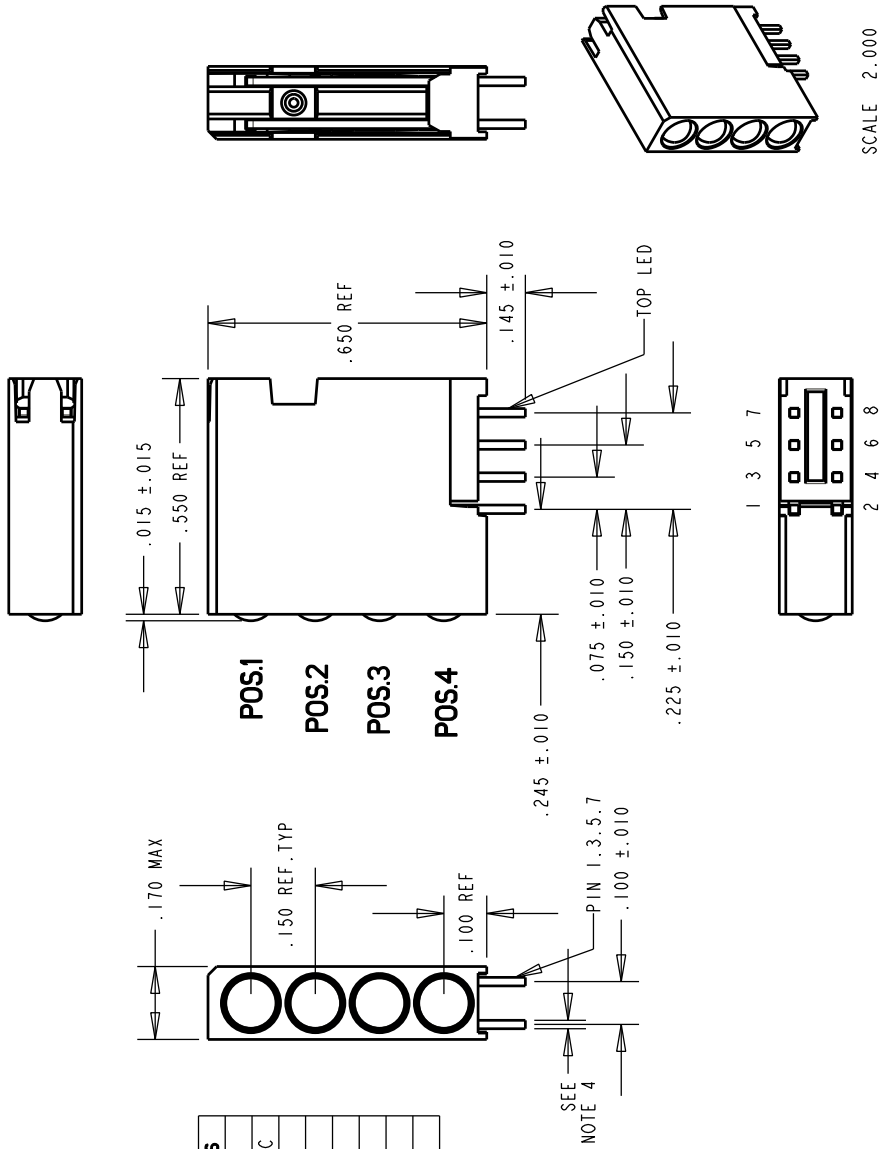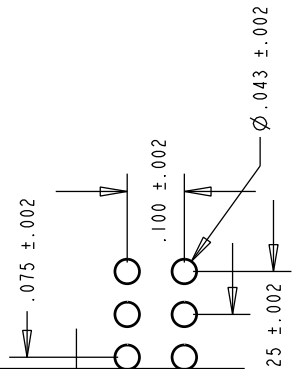

SCALE 2.000



SINGLE COLOR LED SCHEMATIC

ATTENTION: OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC SENSITIVE DEVICES



THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE: 4.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17545	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED		
FRACTIONS: ±1/64		
DECIMALS (.XX): ±.01		
DECIMALS (.XXX): ±.005		
DECIMALS (.XXXX): ±.0005		
ANGLES: ±1°		
FINISH:		
TITLE		
4 x 1 CBI BLOCK- 150 PITCH 6, 6, 6, 6		
.145 LEAD LENGTH ROHS COMPLIANT		
MATERIAL		