
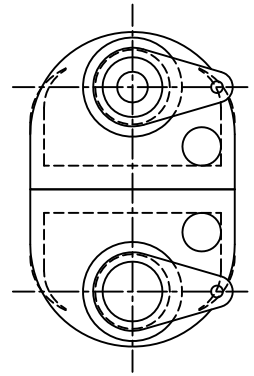
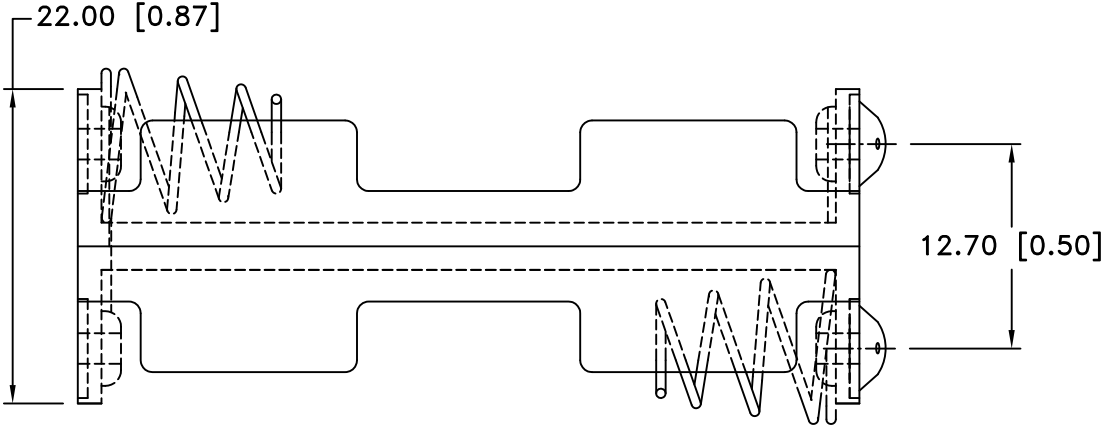



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/30/05	A	(1) 51.80 was 50.80 (2) 14.00 was 12.95 (3) 22.00 was 20.32	T.B.	B.S.	
03/15/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

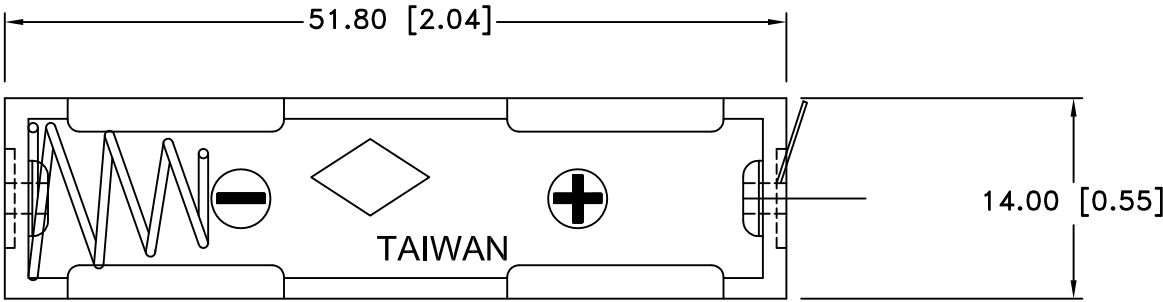

NOTES:  
 Plastic material - Polypropylene  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title TWO "AAA" CELL HOLDER	Date 03/15/13	
Fractional ± .8 (.030)		Drawing Number BC22AAL	
Angular ± 3°			