

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3106F14S-9P](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

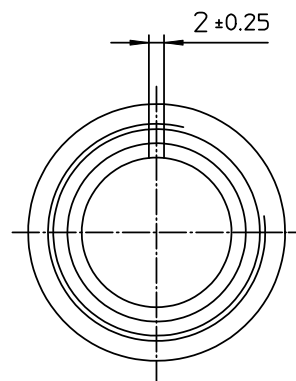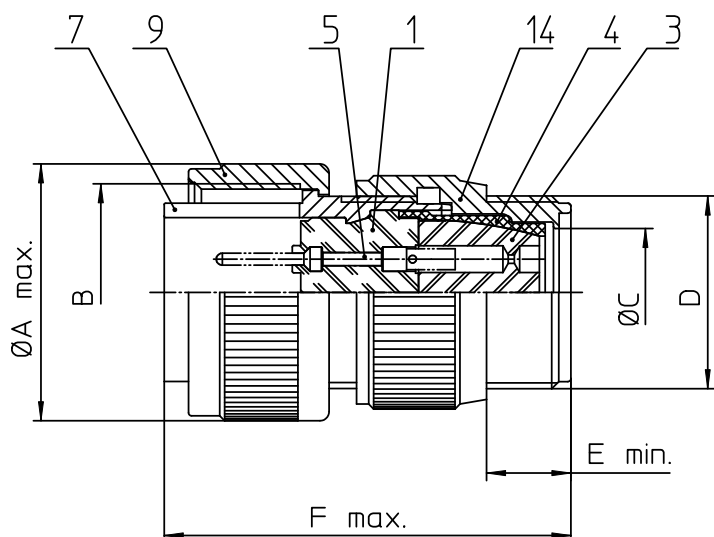

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 28.8              |
| B   | 7/8-20UNEF-2B     |
| C   | 11.1              |
| D   | 3/4-20UNEF-2A     |
| E   | 9.5               |
| F   | 45                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 7   | ZYLINDERGHÄUSE / BARREL             |
| 9   | ÜBERWURFMUTTER / COUPLING NUT       |
| 14  | F-ENDGEHÄUSE / F-ENDBELL            |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                                  |
|-------------------------|--------------------------------------------------|
| Material Specification: |                                                  |
| Shell Material:         | Aluminium alloy                                  |
| Shell Plating:          | Olive drab chromate coating over cadmium plating |
| Insulator Material:     | Neoprene                                         |
| Contact Material:       | Copper alloy                                     |
| Contact Plating:        | Hard silver                                      |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



**ITT**

Engineered for life  
ITT CANNON GmbH  
D-75394 Mersingen/Germany

description CA3106F14S-9P  
Plug, straight  
Endbell for flex tube  
Solder Cup / Pin / Layout: 14S-9

© All rights reserved. Reproduction or issue to third in any form  
whatever is only permitted with written authorization of ITT Cannon

page 1/1  
revision 377 3. Jul 16