

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[KPSE00E22-55PWDN](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

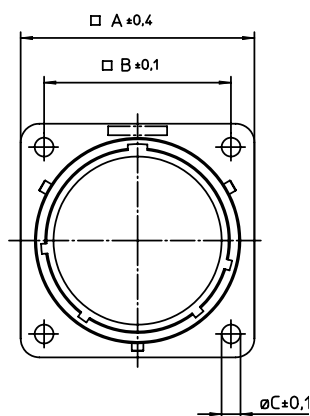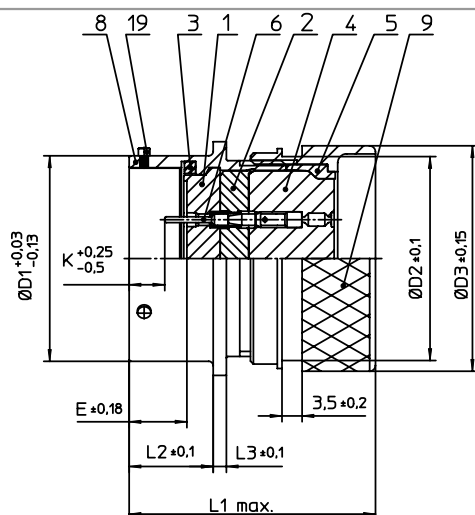

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 2   | ISOLIERKÖRPER MITTE / WAVER         |
| 3   | DICHTRING / GASKET                  |
| 4   | DICHTKÖRPER / GROMMET               |
| 5   | ENDRING / ENDRING                   |
| 6   | KONTAKT STIFT / CONTACT PIN         |
| 8   | GEHÄUSE / RECEPTACLE                |
| 9   | DN-ENDGEHÄUSE / DN-ENDBELL          |
| 19  | BAYONETTSTIFT / BAYONET PIN         |

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 39.6              |
| B   | 31.7              |
| C   | 3.2               |
| D1  | 34.93             |
| D2  | 34.6              |
| D3  | 38.4              |
| E   | 9.82              |
| K   | 3.73              |
| L1  | 43                |
| L2  | 14.2              |
| L3  | 2.2               |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                          |
|-------------------------|------------------------------------------|
| Material Specification: |                                          |
| Shell Material:         | Aluminium alloy                          |
| Shell Plating:          | Olive drab chromate over cadmium plating |
| Insulator Material:     | Polychloroprene                          |
| Contact Material:       | Copper alloy, gold plated                |
| Contact Plating:        | Copper alloy, gold plated                |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description KPSE00E2255PW-DN  
Wall mounting receptacle  
Shrink boot adapter  
Crimp Contacts / Pin / Layout: 22-55

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon. page 1/1 revision 1012.5, Jul 16