

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1551082](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

SACB- 8/3- 5,0PUR-M8

Order No.: 1551082

Without LEDs



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1551082>

Sensor/actuator box, Number of slots: 8, Number of positions: 3, Slot assignment: Single, Status indication: No, pnp 180°, PUR/PVC, Cable length: 5 m, Shielding: No

| Commercial data | |
|-----------------|---------------------|
| GTIN (EAN) | 4 046356 152105 |
| Note | Made-to-order |
| sales group | D102 |
| Pack | 1 pcs. |
| Customs tariff | 85366990 |

Product notes

WEEE/RoHS-compliant since:
09/15/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--|---------|
| Rated voltage | 24 V DC |
| Max. operating voltage U_{max} | 30 V DC |
| Current carrying capacity per I/O signal | 2 A |
| Current carrying capacity per slot | 2 A |

SACB- 8/3- 5,0PUR-M8 Order No.: 1551082

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1551082>

| | |
|------------------------------------|------------------|
| Total rated current | 6 A |
| Number of positions | 3 |
| Number of slots | 8 |
| Degree of protection | IP65/IP67 |
| Inflammability class acc. to UL 94 | V0 |
| Ambient temperature (operation) | -30 °C ... 80 °C |

Master cable data

| | |
|--|--|
| Type of connection | Fixed connection |
| Length of cable | 5 m |
| Cable type | Master cable suitable for flexible cable conduit |
| AWG signal line | 22 |
| AWG power supply | 18 |
| Tightening torque slot sensor/actuator cable | 0.2 Nm |
| Tightening torque screw plug | 0.2 Nm |

Insulation material

| | |
|-------------------------------------|---------------|
| Housing material | PBT |
| Material of the moulding mass | PUR |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material of threaded sleeve | Cu alloy |
| Material of threaded sleeve surface | Nickel-plated |
| Material, O-ring | NBR |


SACB- 8/3- 5,0PUR-M8 Order No.: 1551082

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1551082>

Diagrams/Drawings

Schematic diagram

M8 slot, socket, 3-pos.

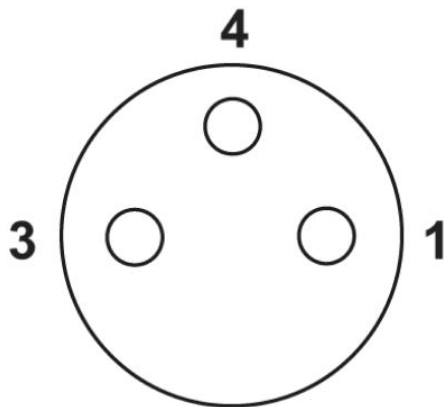

SACB- 8/3- 5,0PUR-M8 Order No.: 1551082

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1551082>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;