

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1929533](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog


MKDSP 10HV/ 2-12,7

Order No.: 1929533



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1929533>

PC terminal block, Nominal current: 76 A, Nom. voltage: 1000 V, Pitch: 12.7 mm, Number of positions: 2, Type of connection: Screw connection, Mounting: Soldering, Conductor/PCB connection direction: 0 °, Color: green, The article can be aligned to create different nos. of positions!

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 819651 |
| sales group | E530 |
| Pack | 50 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 323 (CC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

| | |
|--------|---------|
| Length | 22 mm |
| Pitch | 12.7 mm |

MKDSP 10HV/ 2-12,7 Order No.: 1929533

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1929533>

| | |
|------------------------|------------|
| Dimension a | 12.7 mm |
| Number of positions | 2 |
| Pin dimensions | 1 x 0,9 mm |
| Hole diameter | 1.5 mm |
| Screw thread | M4 |
| Tightening torque, min | 1.2 Nm |
| Tightening torque max | 1.5 Nm |

Technical data

| | |
|-------------------------------------|--|
| Range of articles | MKDSP 10HV |
| Insulating material group | I |
| Rated surge voltage (III/3) | 8 kV |
| Rated surge voltage (III/2) | 8 kV |
| Rated surge voltage (II/2) | 6 kV |
| Rated voltage (III/2) | 1000 V |
| Rated voltage (II/2) | 1000 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 76 A |
| Nominal voltage U_N | 1000 V |
| Nominal cross section | 16 mm ² |
| Maximum load current | 76 A (with 16 mm ² conductor cross section) |
| Insulating material | PA |
| Inflammability class acc. to UL 94 | V0 |
| Internal cylindrical gage | B6 |
| Stripping length | 10 mm |
| Nominal voltage, UL/CUL Use Group B | 600 V |
| Nominal current, UL/CUL Use Group B | 60 A |
| Nominal voltage, UL/CUL Use Group C | 600 V |
| Nominal current, UL/CUL Use Group C | 60 A |

Connection data

| | |
|--|---------------------|
| Conductor cross section solid min. | 0.5 mm ² |
| Conductor cross section solid max. | 16 mm ² |
| Conductor cross section stranded min. | 0.5 mm ² |
| Conductor cross section stranded max. | 16 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.5 mm ² |

MKDSP 10HV/ 2-12,7 Order No.: 1929533

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1929533>

| | |
|---|---------------------|
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 16 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.5 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 16 mm ² |
| Conductor cross section AWG/kcmil min. | 20 |
| Conductor cross section AWG/kcmil max | 6 |
| 2 conductors with same cross section, solid min. | 0.5 mm ² |
| 2 conductors with same cross section, solid max. | 4 mm ² |
| 2 conductors with same cross section, stranded min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded max. | 4 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 2.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 6 mm ² |
| Minimum AWG according to UL/CUL | 20 |
| Maximum AWG according to UL/CUL | 6 |

Certificates / Approvals



Certification

CB, CCA, CUL, GOST, SEV, UL

Accessories

| Item | Designation | Description |
|-----------------|---------------------|---|
| Assembly | | |
| 1929672 | RZ-MKDSP 10 HV-2,54 | Pitch spacer, raises the pitch by 2.54 mm, interlocks with terminal block, color: green |

MKDSP 10HV/ 2-12,7 Order No.: 1929533
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1929533>

General

| | | |
|---------|--------------------|---|
| 1929546 | MKDSP 10HV/ 3-12,7 | PC terminal block, Nominal current: 76 A, Nom. voltage: 1000 V, Pitch: 12.7 mm, Number of positions: 3, Type of connection: Screw connection, Mounting: Soldering, Conductor/PCB connection direction: 0 °, Color: green, The article can be aligned to create different nos. of positions! |
|---------|--------------------|---|

Marking

| | | |
|---------|------------------------|---|
| 1051993 | B-STIFT | Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm |
| 0805179 | SK 10/5:SO | Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 10 identical marker strips per card, max. 25-position labeling per strip, color: White |
| 0805221 | SK 5,0 WH:REEL | Self-adhesive marker strips, unprinted, material off the roll, for individual labeling with thermal transfer printer CMS-THERMO X1, pitch as desired, strips up to 1000 mm long, 10 strips, height: 5 mm, 1 roll = 90 m |
| 0803922 | SK U/5,0 WH:UNBEDRUCKT | |

Plug/Adapter


| | | |
|---------|-----|----------------------------|
| 0201647 | RPS | Reducing plug, Color: gray |
|---------|-----|----------------------------|

Tools

| | | |
|---------|-------------|--|
| 1205053 | SZS 0,6X3,5 | Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |
|---------|-------------|--|

Diagrams/Drawings


Drilling plan/solder pad geometry

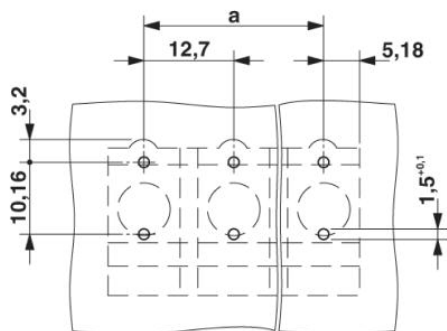

MKDSP 10HV/ 2-12,7 Order No.: 1929533

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1929533>

Dimensioned drawing

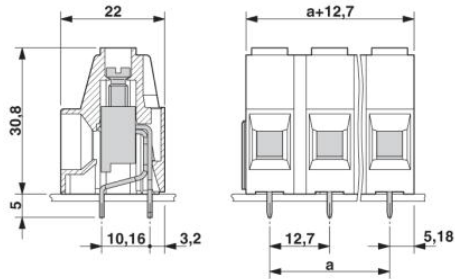

MKDSP 10HV/ 2-12,7 Order No.: 1929533

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1929533>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;