

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1646476](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog


## HC-B 10-SMLD-74/O2M32

Order No.: 1646476



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1646476>

HEAVYCON box mounting base B10, with single locking latch, height 74 mm, with supports 2xM32, with cover

Commercial data	
GTIN (EAN)	 4 017918 985219
Note	Made-to-order
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 483 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Height	74 mm
Width	57 mm
Length	93 mm


HC-B 10-SMLD-74/O2M32 Order No.: 1646476

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1646476>

Housing type	Box mounting base with cover
Locking type	With single locking latch
Type of the screw connection	2x M32
Protective cover	Yes
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF
Material, protective cover	PA

### Diagrams/Drawings

Dimensioned drawing

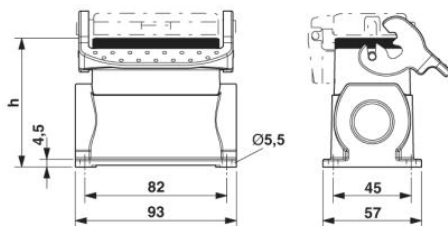

HC-B 10-SMLD-74/O2M32 Order No.: 1646476

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1646476>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;