

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1642784](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog


HC-B 24-TFQ-76/O1STM25G-EMV

Order No.: 1642784



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642784>

HEAVYCON sleeve housing B24, for double locking latch, height 76 mm, with thread M25, straight cable outlet, EMC version

Commercial data	
GTIN (EAN)	 4 046356 028547
sales group	D002
Pack	5 pcs.
Customs tariff	85389099
Catalog page information	Page 519 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
12/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data	
Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	76 mm
Width	43 mm
Length	120 mm

HC-B 24-TFQ-76/O1STM25G-EMV Order No.: 1642784
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642784>

Housing type	EMC housings
Locking type	For double locking latch
Cable exit	Straight
Type of the screw connection	1x M25
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 100 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC coating, silver


Diagrams/Drawings

Diagram

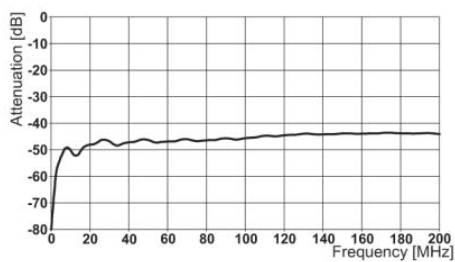

Shield attenuation

Dimensioned drawing

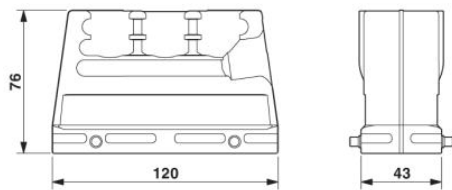

HC-B 24-TFQ-76/O1STM25G-EMV Order No.: 1642784
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642784>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;