

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1605004](#)


For any questions, you can email us directly:
sales@integrated-circuit.com



Extract from the online catalog

HC-M-25-MOD-ST

Order No.: 1605004



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1605004>

HEAVYCON contact insert module, male, 25-pos., crimp connection

Commercial data	
GTIN (EAN)	 4 017918 893330
sales group	D042
Pack	2 pcs.
Customs tariff	85369010
Catalog page information	Page 458 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/27/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics	
Note	For housing HC-B6 to B48, for housing HC-ADVANCE-B6 to B24, hinged retaining frame HC-M-MHR... necessary, crimp contacts VS-...CD-1,0... (crimp contacts not included in scope of supply)
Rated voltage (III/3)	50 V
Rated current	5 A
Rated surge voltage	0.8 kV
Ambient temperature (operation)	-40 °C ... 125 °C
Number of positions	25

HC-M-25-MOD-ST Order No.: 1605004

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1605004>

Mechanical characteristics

Conductor cross-section	0.09 mm ² ... 0.5 mm ²
Connection cross-section AWG	28 ... 20
Stripping length of the individual wire	3.8 mm
Insertion/withdrawal cycles	≥ 500

General characteristics

Number of module slots	1
Connection method	Crimp connection
Inflammability class acc. to UL 94	V0
Pollution degree	3
Surge voltage category	III
Assembly instructions	Housing height ≥ 52 mm. Plug-in connections may only be operated only when there is no load/voltage. Use of HC-CST (1676857) keying pins and HC-CBU (1676860) coding sockets has been prescribed.

Material data

Contact material	Copper alloy
Contact surface material	Au
Contact carrier material	PC

Certificates / Approvals



Certification


GOST

HC-M-25-MOD-ST Order No.: 1605004

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1605004>


Diagrams/Drawings

Diagram

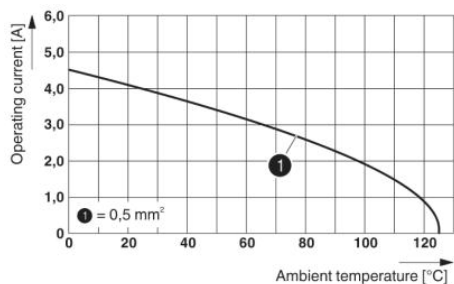

Derating diagram (6 modules in HC-B 24 housing)

Dimensioned drawing

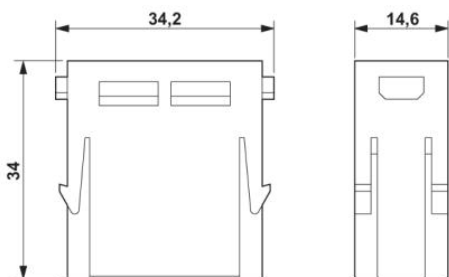


Male insert

HC-M-25-MOD-ST Order No.: 1605004

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1605004>

Schematic diagram

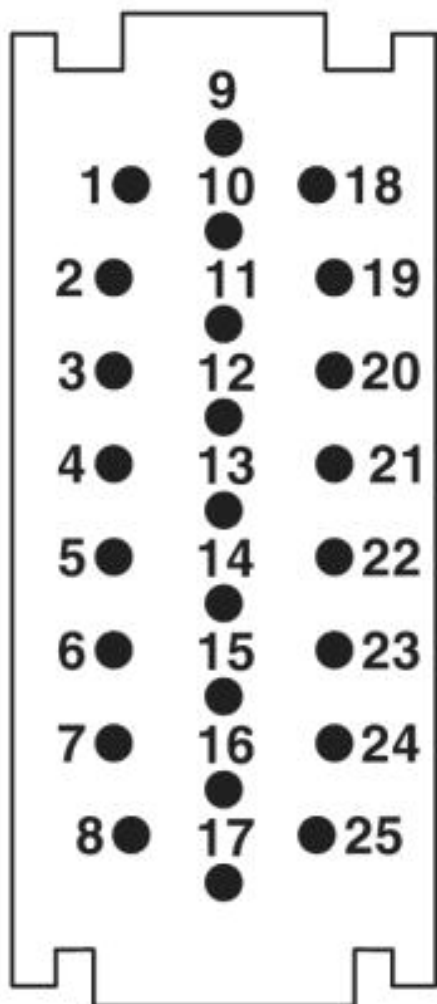

HC-M-25-MOD-ST Order No.: 1605004

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1605004>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;