

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2940430](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

EMG 17-REL/KSR-W230/21-21-LC

Order No.: 2940430

The illustration shows version EMG 17-REL/KSR- 24/21-21-LC AU, with soldered-in miniature switching relay



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2940430>

Relay module, with soldered-in miniature switching relay, contact (AgNi): Medium to large loads, 2 PDT, input voltage 230 V DC



Commercial data	
GTIN (EAN)	4 017918 080105
sales group	G034
Pack	10 pcs.
Customs tariff	85364900
Catalog page information	Page 125 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
05/19/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

Nominal input voltage U_N	230 V AC
Input voltage range in reference to U_N	0.85 ... 1.1
Nominal input current at U_{IN}	4 mA

EMG 17-REL/KSR-W230/21-21-LC Order No.: 2940430
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2940430>

Typical response time	7 ms
	3 ms ... 12 ms
Typical release time	3 ms
Typical release time range	2 ms ... 9 ms
Operating voltage display	Glow lamp
Type of protection	Bridge rectifier
Protective circuit/component	Bridge rectifier

Contact side

Contact type	Single contact, 2-PDT
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Maximum inrush current	6 A
Limiting continuous current	5 A
Interrupting rating (ohmic load) max.	120 W (at 24 V DC)
	95 W (for 48 V DC)
	60 W (for 60 V DC)
	40 W (for 110 V DC)
	55 W (for 220 V DC)
	1250 VA (for 250 V AC)

General data

Width	17.5 mm
Height	75 mm
Depth	62.5 mm
Test voltage relay winding/relay contact	4 kV AC (50 Hz, 1 min.)
Test voltage relay contact/relay contact	1 kV AC (50 Hz, 1 min.)
Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Operating mode	100% operating factor
Mechanical service life	Approx. 5×10^7 cycles
Standards/regulations	IEC 60664
	EN 50178
	IEC 62103
Rated surge voltage / insulation	4 kV / Basic isolation, (safe isolation, reinforced insulation and 6 kV between input circuit and output contact current paths.)
Pollution degree	2

EMG 17-REL/KSR-W230/21-21-LC Order No.: 2940430
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2940430>

Surge voltage category	III
Mounting position	Any
Assembly instructions	In rows with zero spacing

Connection data

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals



Certification CUL, GOST, UL

Accessories


Item	Designation	Description
------	-------------	-------------

Marking

2947035	EMG-GKS 12	Equipment marker, width 12 mm
---------	------------	-------------------------------

Diagrams/Drawings

Circuit diagram

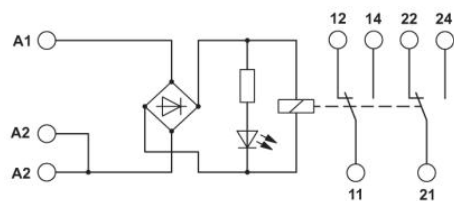

EMG 17-REL/KSR-W230/21-21-LC Order No.: 2940430
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2940430>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;