

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2295949](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



Extract from the online catalog

FLKMS-D 9 SUB/B/ZFKKDS/PE


Order No.: 2295949

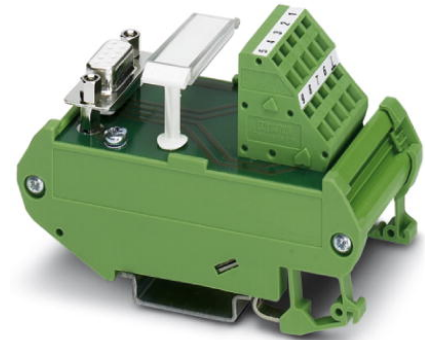

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2295949>

VARIOFACE module, with spring-cage connection and D-Subminiature socket strip, for mounting on NS 35/7.5 or NS 32, 9-pos.

Commercial data

GTIN (EAN)	 4 017918 448028
sales group	I091
Pack	1 pcs.
Customs tariff	85369010

Product notes

WEEE/RoHS-compliant since:
05/17/2010



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	125 V AC/DC
Max. current carrying capacity per branch	2.5 A
Number of positions	9
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C

FLKMS-D 9 SUB/B/ZFKKDS/PE Order No.: 2295949

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2295949>

Test voltage	800 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 664/IEC 664 A
	DIN VDE 0110
	DIN VDE 0109-11, draft
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Connection 2	D-SUB connection
Type of connection	Pluggable
Number of positions	9

FLKMS-D 9 SUB/B/ZFKKDS/PE Order No.: 2295949
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2295949>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;