

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2961367](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



Extract from the online catalog

REL-MR- 4,5DC/21


Order No.: 2961367

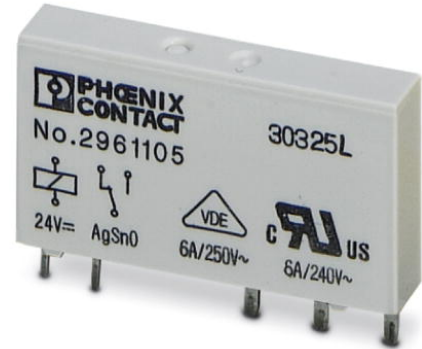

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961367>

Pluggable miniature relay, with power contact, 1 PDT, input voltage 4.5 V DC

Commercial data

GTIN (EAN)	 4 017918 730840
sales group	G084
Pack	10 pcs.
Customs tariff	85364900
Catalog page information	Page 92 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
05/09/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

Nominal input voltage U_N	4.5 V DC
Input voltage range in reference to U_N	(refer to the diagram)
Nominal input current at U_{IN}	38 mA
Typical response time	5 ms

REL-MR- 4,5DC/21 Order No.: 2961367

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961367>

Typical release time	2.5 ms
Coil resistance	119 Ω ±10 % (at 20°C)

Contact side

Contact type	Single contact, 1-PDT
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V (at 100 mA)
Maximum inrush current	(on request)
Min. switching current	10 mA (at 12 V)
Limiting continuous current	6 A
Interrupting rating (ohmic load) max.	140 W (at 24 V DC)
	20 W (for 48 V DC)
	18 W (for 60 V DC)
	23 W (for 110 V DC)
	40 W (for 220 V DC)
	1500 VA (for 250 V AC)

General data

Width	5 mm
Height	28 mm
Depth	15 mm
Test voltage relay winding/relay contact	4 kV AC (50 Hz, 1 min.)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Operating mode	100% operating factor
Mechanical service life	2 x 10 ⁷ cycles
Standards/regulations	IEC 60664
	EN 50178
	IEC 62103
Pollution degree	3
Surge voltage category	III
Mounting position	Any
Assembly instructions	In rows with zero spacing

Connection data

Type of connection	Plug / solder connection
--------------------	--------------------------

REL-MR- 4,5DC/21 Order No.: 2961367
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961367>

Certificates / Approvals



Certification


CUL, GL, GOST, UL, VDE-PZI, VDE-PZI

Additional products

Item	Designation	Description
General		
2980241	PLC-BSC- 5DC/ 1/ACT	6.2 mm PLC actuator basic terminal blocks with screw connection method, input voltage 5 V DC(without relay or optocoupler)
2980225	PLC-BSC- 5DC/21	6.2 mm PLC basic terminal blocks with screw connection method, input voltage 5 V DC(without relay or optocoupler)
2980254	PLC-BSP- 5DC/ 1/ACT	6.2 mm PLC PLC actuator basic terminal blocks with spring-cage connection method, input voltage 5 V DC(without relay or optocoupler)
2980238	PLC-BSP- 5DC/21	6.2 mm PLC basic terminal blocks with spring-cage connection method, input voltage 5 V DC(without relay or optocoupler)

Diagrams/Drawings

Drilling plan/solder pad geometry

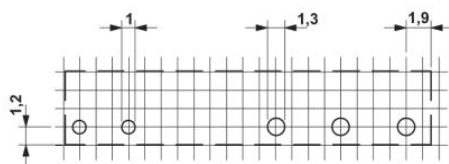


a = pitch division 1.25 mm and 1.27 mm


REL-MR- 4,5DC/21 Order No.: 2961367

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961367>


Diagram

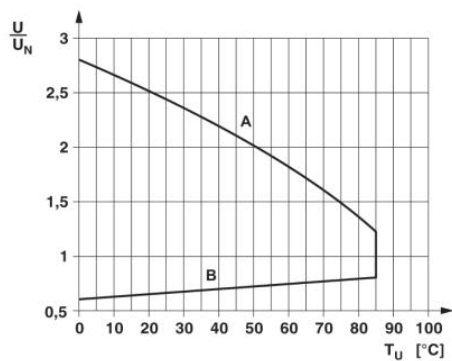

Dimensioned drawing

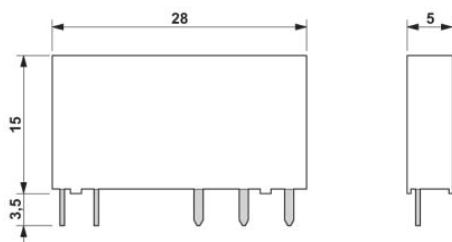

Circuit diagram

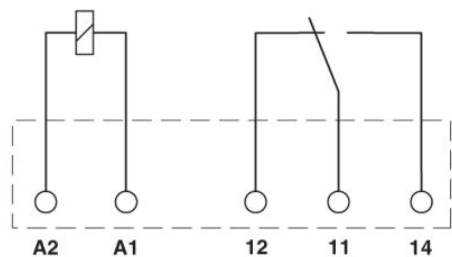

REL-MR- 4,5DC/21 Order No.: 2961367

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961367>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;