

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[2803962](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## VAL-SQ SP 120-120/240HLD/FM

**This item is no longer available. Should you have any questions, please contact our Sales Team.**

Order No.: 2803962



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803962>

Surge protection device for 120/240 V AC High-Leg Delta configurations. Uses a compact, NEMA rated enclosure that connects easily to an existing enclosure. Hybrid Sine Wave Tracking provides 120 kA surge protection.

### Commercial data

GTIN (EAN)	 4 046356 317085
Note	Made-to-order
sales group	J102
Pack	1 pcs.
Customs tariff	85363030
Catalog page information	Page 71 (TT-2009)

<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

Surge protection device for 120/240 V AC High-Leg Delta configurations with 120 kA protection

### Technical data

#### Standards

Degree of protection	IP66 / NEMA 4X
Mounting type	3/4 inch NPT male
Design	Parallel MOV

VAL-SQ SP 120-120/240HLD/FM Order No.: 2803962  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803962>

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	3658 m
Message: Surge protection fault	Phase LEDs
	Audible alarm
	Remote indicator contact
Direction of action	3L-N & N-GND
Width	250.00 mm
Height	122.00 mm
Length	79.00 mm

**Protective circuit**

IEC category	I + II
Arrester rated voltage $U_c$	275 V
	150 V
Response time	< 1 ns

**Connection, protective circuit**

Type of connection	#10 AWG/5.26 mm <sup>2</sup> wires (24 in./61 cm long)
Connection method	4-wire + Gnd
Conductor cross section AWG/kcmil min.	10
Conductor cross section AWG/kcmil max	10

**Remote indicator contact**

Type of connection	#24 AWG/0.205 mm <sup>2</sup> wires (24 in./61 cm long)
--------------------	---

**Environmental conditions**

Standards/regulations	UL 1449 2 <sup>nd</sup> edition, February 2007
	UL 1283
	IEEE C62.41
	IEEE C62.45

**NEMA / UL data**


UL type	type 2
Maximum Surge Current per Phase	120 kA
Short-circuit current rating (SCCR)	200 kA
Maximum Circuit Breaker	30 A

VAL-SQ SP 120-120/240HLD/FM Order No.: 2803962

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803962>

## Diagrams/Drawings

### Circuit diagram

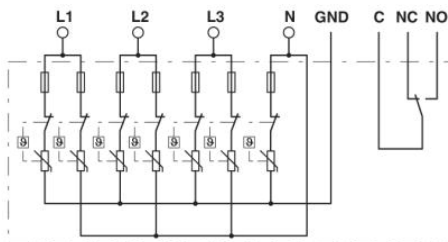

VAL-SQ SP 120-120/240HLD/FM Order No.: 2803962

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803962>

---

#### Address

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;