

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Laird Technologies - Signal Integrity Products](#)  
[MI1206K260R-00](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DIFFERENTIAL MODE



## Medium Current Ferrite Chip Beads

**Steward's** surface mount ferrite chips provide compact, cost effective EMI filtering for densely packed PCB designs. The small footprint enables placement very close to troublesome high frequency devices. Our proprietary SMT construction yields rugged components with superior impedance vs. frequency characteristics.

### Features:

- Small footprint
- Excellent retention under Bias
- Rugged, monolithic construction
- Superior impedance vs. frequency characteristics
- Economical
- Broad range of sizes (from 0603 up to 1812)
- Broad range of impedance values and current ratings

### Applications:


- Filtering of power input pins and devices using high speed clocks
- Filtering of low frequency input/output signals of shielded enclosures
- High frequency filtering of medium speed clocks and video signals
- Preventing oscillations in high frequency amplifiers
- Data bus filtration
- Discrete component filtration in power supplies

### Test Specifications:

- Maximum current ratings are determined by testing to a maximum temperature rise of 40° C with continuous operating current
- Board level components are rated up to a maximum of 75 volts
- Tested with:** • HP4396A (100KHz - 1.8 GHz) or HP8753 (to 6 GHz) Network/Spectrum Analyzer • HP43961A Impedance Test Kit • HP16192A Test Fixture or Inter-Continental Microwave custom fixtures • HP16200A DC Bias Adapter • Philips PM2811 DC Power Supply • Ambient Temperature 23.5°C ± 2° • Bandwidth 3 kHz • Sweep Time 423 ms • Impedance is rated at ± 25% @100MHz

### PART NUMBERING SYSTEM

<u>MI</u>	<u>0603</u>	<u>K</u>	<u>300</u>	<u>R</u>	-	<u>00</u>
PRODUCT SERIES CODE	PART SIZE CODE	RATED CURRENT CODE	IMPEDANCE VALUE CODE	PACKAGING CODE		ADDITIONAL PART DESCRIPTION



Ambient Operating Temperature Range: -55° C to +125° C

PART NUMBER	A mm (inches)	B mm (inches)	C mm (inches)	D mm (inches)	IMPEDANCE (Z) TYPICAL OHMS @			DCR MAX OHMS	RATED I MAX (continuous) mA
					100MHz	500MHz	1GHz		
MI0603K300R-00	1.60 ± 0.15 (0.063 ± 0.006)	0.80 ± 0.15 (0.031 ± 0.006)	0.80 ± 0.15 (0.031 ± 0.006)	0.36 ± 0.15 (0.014 ± 0.006)	30	41	43	0.090	1,500
MI0603J600R-00	1.60 ± 0.15 (0.063 ± 0.006)	0.80 ± 0.15 (0.031 ± 0.006)	0.80 ± 0.15 (0.031 ± 0.006)	0.36 ± 0.15 (0.014 ± 0.006)	60	92	103	0.100	1,000
MI0603J680R-00	1.60 ± 0.15 (0.063 ± 0.006)	0.80 ± 0.15 (0.031 ± 0.006)	0.80 ± 0.15 (0.031 ± 0.006)	0.36 ± 0.15 (0.014 ± 0.006)	68	106	99	0.100	1,000
* MI0805J070R-00	2.00 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	0.90 ± 0.20 (0.035 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	7	23	28	0.100	1,000
MI0805K110R-00	2.00 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	0.90 ± 0.20 (0.035 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	11	18	19	0.060	1,500
MI0805K170R-00	2.00 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	0.90 ± 0.20 (0.035 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	17	24	24	0.060	1,500
MI0805K260R-00	2.00 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	0.90 ± 0.20 (0.035 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	26	43	45	0.060	1,500
MI0805K320R-00	2.00 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	0.90 ± 0.20 (0.035 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	32	51	51	0.060	1,500
MI0805K400R-00	2.00 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	0.90 ± 0.20 (0.035 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	40	60	63	0.050	1,500
MI1206K260R-00	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.10 ± 0.20 (0.043 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	26	38	40	0.060	1,500
MI1206K310R-00	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.10 ± 0.20 (0.043 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	31	45	50	0.080	1,500
MI1206J700R-00	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.10 ± 0.20 (0.043 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	70	104	107	0.100	1,000
MI1206K900R-00	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.10 ± 0.20 (0.043 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	90	142	158	0.080	1,500

STEWARD - U.S.A. • Telephone: 423/867-4100 • Fax 423/867-4102 • Internet: http://www.steward.com

SCOTLAND • Telephone: 44-(0)1-506-414200 • Fax 44-(0)1-506-410694

SINGAPORE • Telephone: (65)337-9667 • Fax (65)337-9686


PART NUMBER	A mm (inches)	B mm (inches)	C mm (inches)	D mm (inches)	IMPEDANCE (Z) TYPICAL OHMS @			DCR MAX OHMS	RATED I MAX (continuous) mA
					100MHz	500MHz	1GHz		
MI1206K101R-00	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.10 ± 0.20 (0.043 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	100	146	152	0.075	1,500
MI1206L501R-00	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.10 ± 0.20 (0.043 ± 0.008)	0.51 ± 0.25 (0.020 ± 0.010)	500	150	82	0.060	2,000
MI1806J800R-00	4.50 ± 0.25 (0.177 ± 0.010)	1.60 ± 0.25 (0.063 ± 0.010)	1.60 ± 0.25 (0.063 ± 0.010)	0.51 ± 0.25 (0.020 ± 0.010)	80	129	131	0.150	1,000
MI1812K121R-00	4.50 ± 0.25 (0.177 ± 0.010)	3.20 ± 0.25 (0.126 ± 0.010)	1.40 ± 0.25 (0.055 ± 0.010)	0.51 ± 0.25 (0.020 ± 0.010)	120	198	213	0.060	1,500

\* See Steward web site at www.steward.com for the most recent performance curves

**MI0603K300R-00**

Z, R, X<sub>L</sub> vs. Frequency


Impedance, Resistance, Inductive Reactance

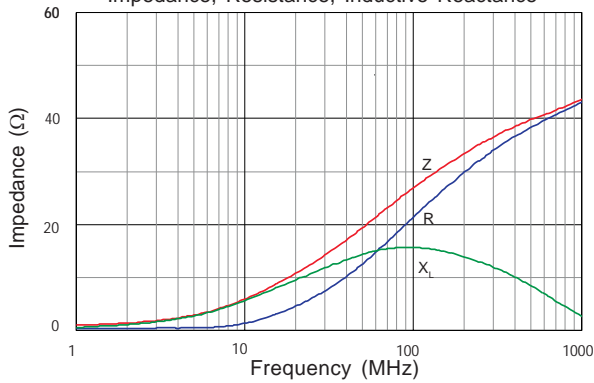

**MI0603K300R-00**

Z vs. Frequency


Impedance Under DC Bias

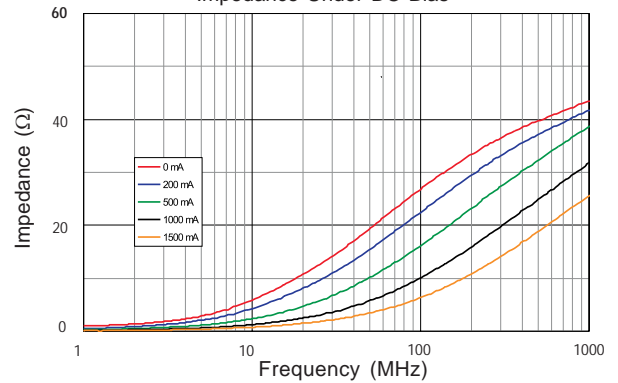

**MI0603J600R-00**

Z, R, X<sub>L</sub> vs. Frequency


Impedance, Resistance, Inductive Reactance

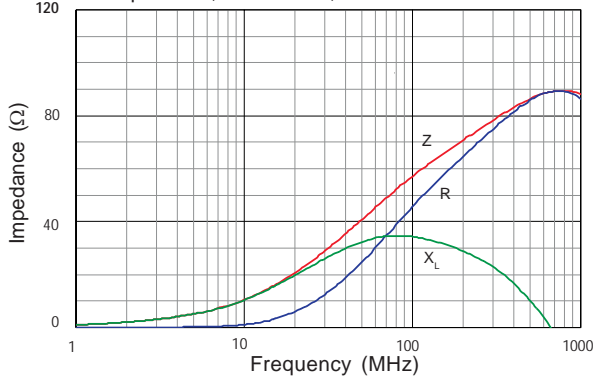

**MI0603J600R-00**

Z vs. Frequency


Impedance Under DC Bias

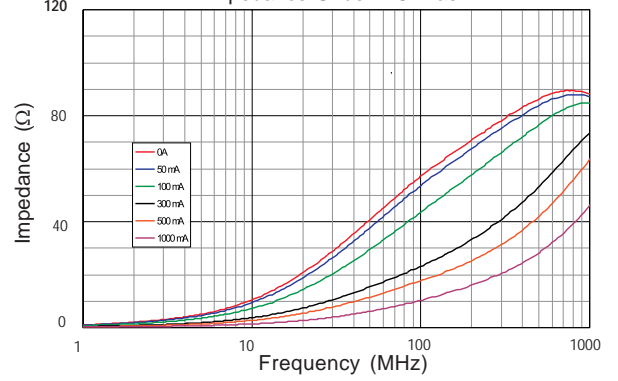

**MI0603J680R-00**

Z, R, X<sub>L</sub> vs. Frequency


Impedance, Resistance, Inductive Reactance

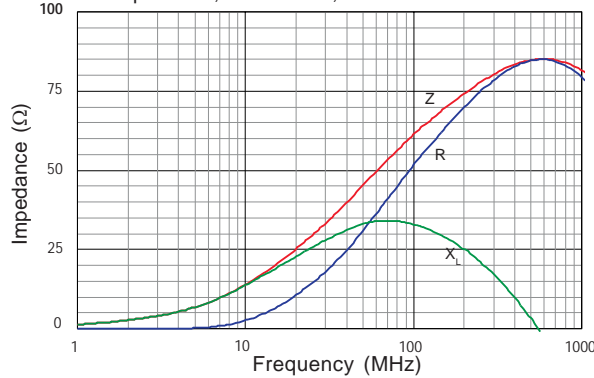

**MI0603J680R-00**

Z vs. Frequency

Impedance Under DC Bias

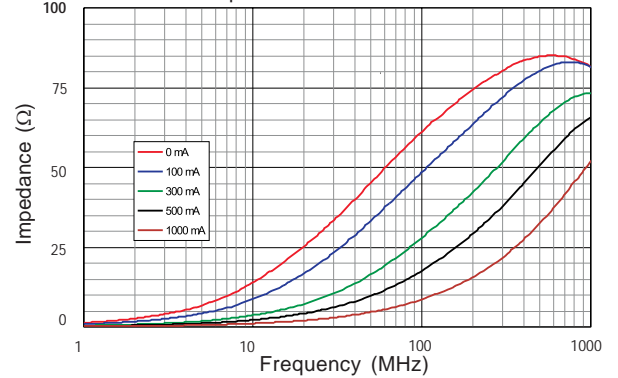


DIFFERENTIAL MODE

**MI0805K110R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

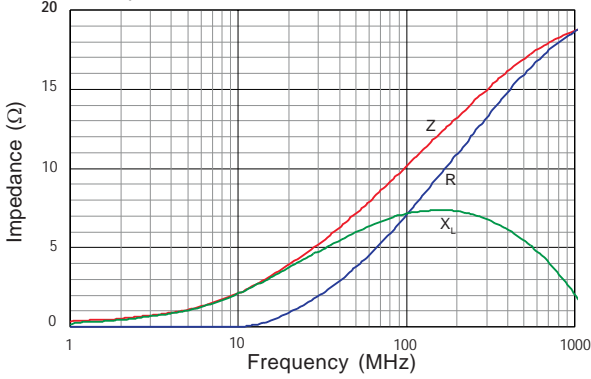

**MI0805K110R-00**

Z vs. Frequency


Impedance Under DC Bias

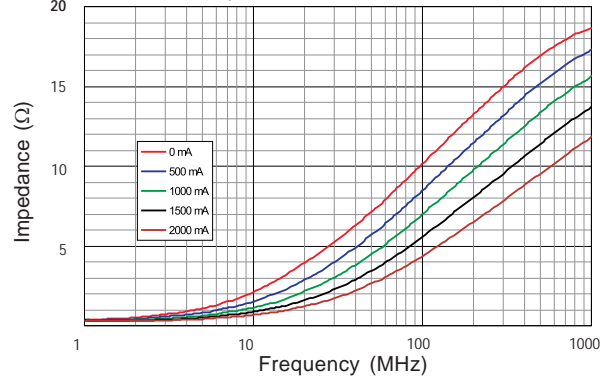

**MI0805J170R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

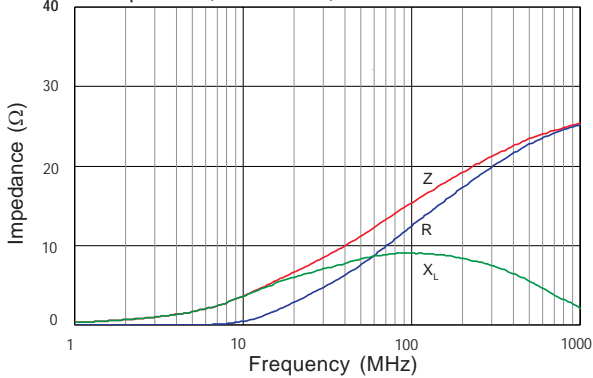

**MI0805J170R-00**

Z vs. Frequency


Impedance Under DC Bias

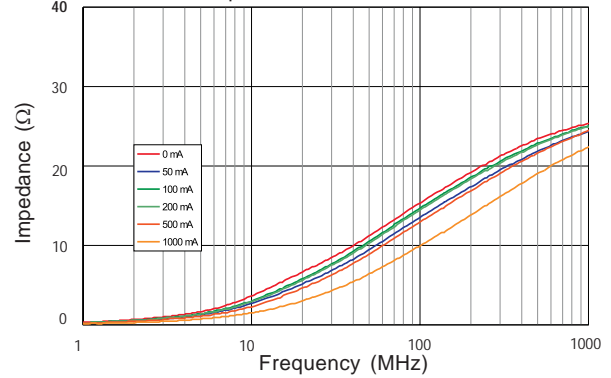

**MI0805K260R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

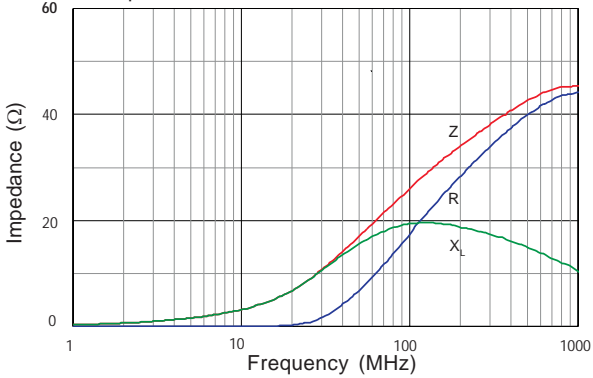

**MI0805K260R-00**

Z vs. Frequency


Impedance Under DC Bias

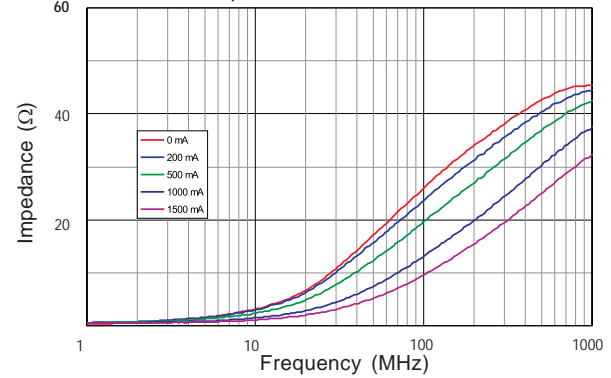

**MI0805K320R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

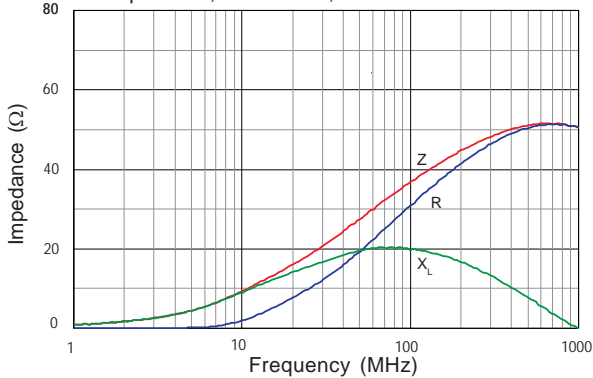

**MI0805K320R-00**

Z vs. Frequency


Impedance Under DC Bias

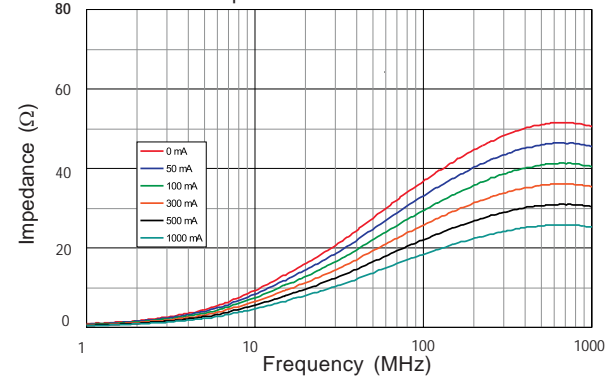

**MI0805K400R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

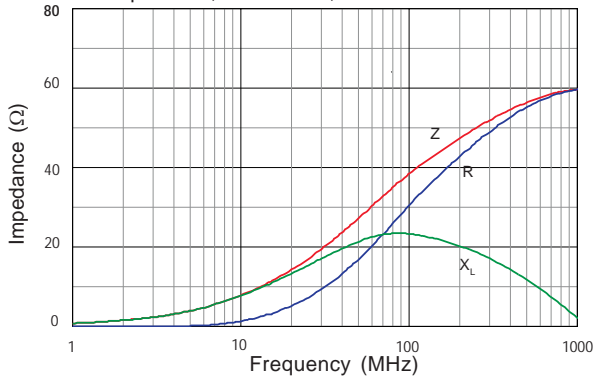

**MI0805K400R-00**

Z vs. Frequency


Impedance Under DC Bias

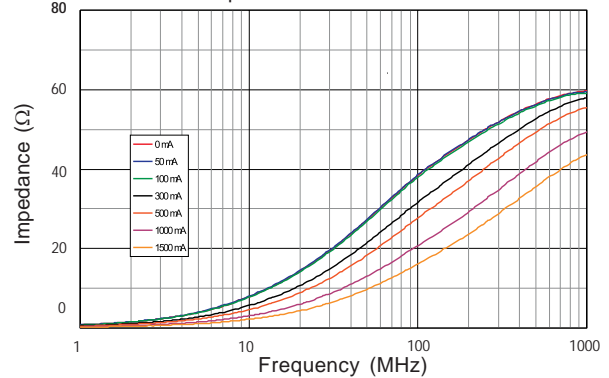

**MI1206K260R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

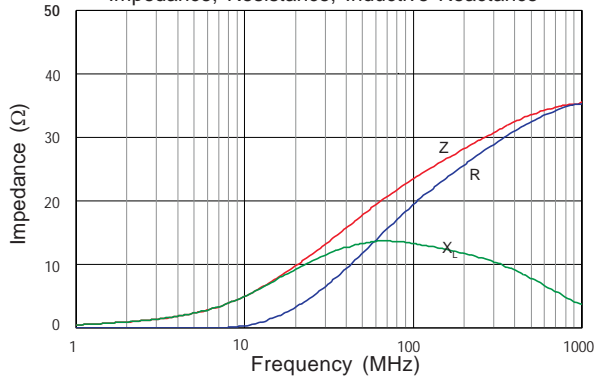

**MI1206K260R-00**

Z vs. Frequency


Impedance Under DC Bias

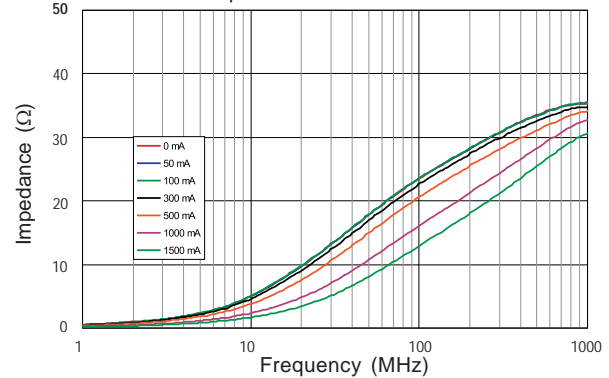

**MI1206K310R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

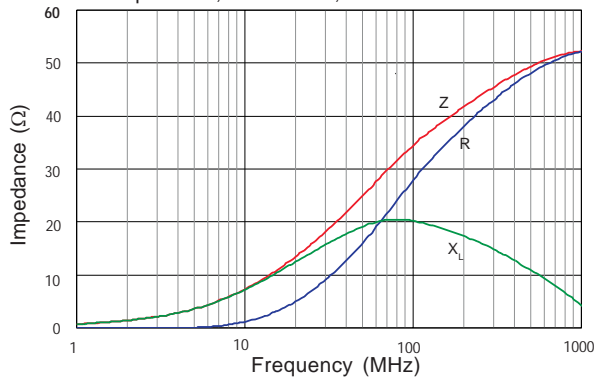

**MI1206K310R-00**

Z vs. Frequency


Impedance Under DC Bias

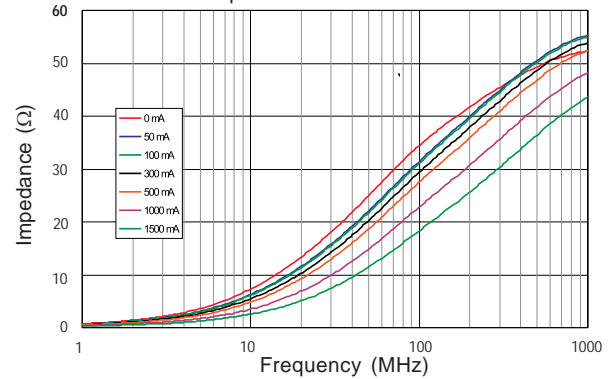

**MI1206J700R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

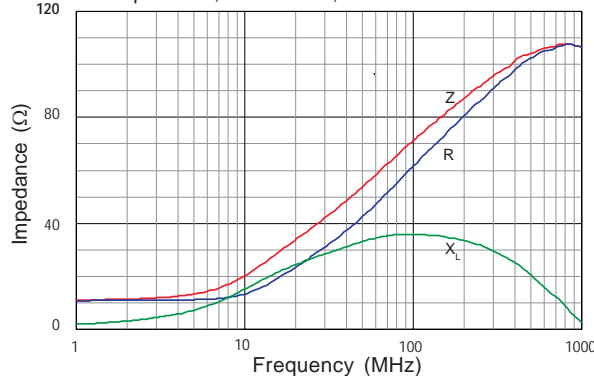

**MI1206J700R-00**

Z vs. Frequency

Impedance Under DC Bias

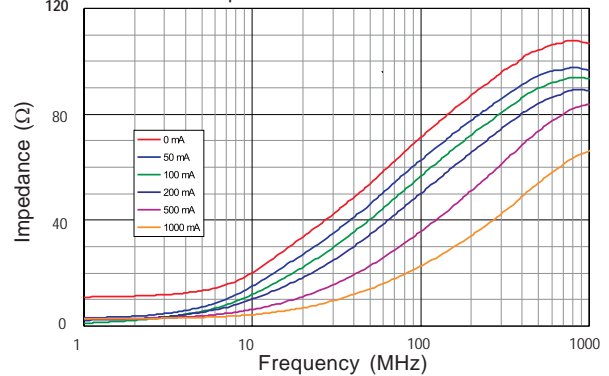


DIFFERENTIAL MODE

**MI1206K900R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

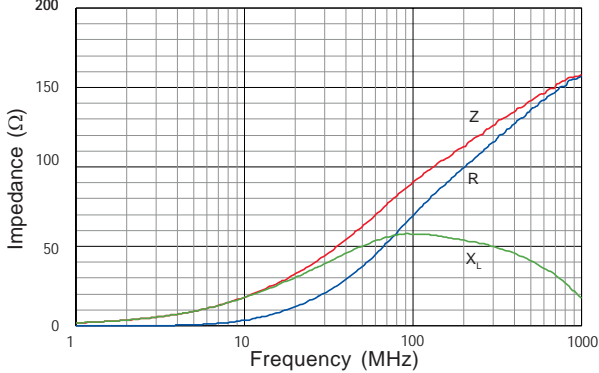

**MI1206K900R-00**

Z vs. Frequency


Impedance Under DC Bias

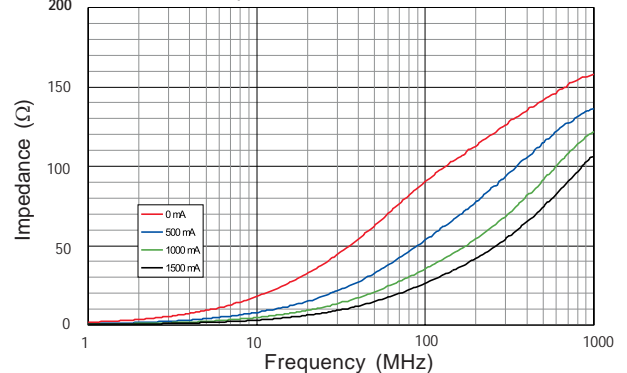

**MI1206K101R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

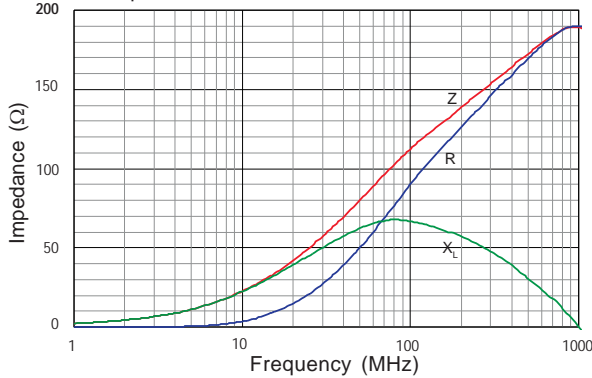

**MI1206K101R-00**

Z vs. Frequency


Impedance Under DC Bias

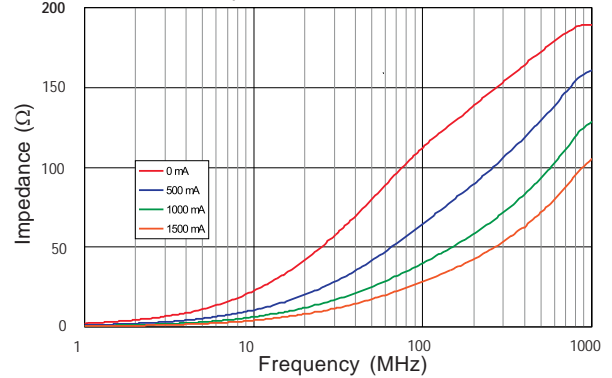

**MI1206L501R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance

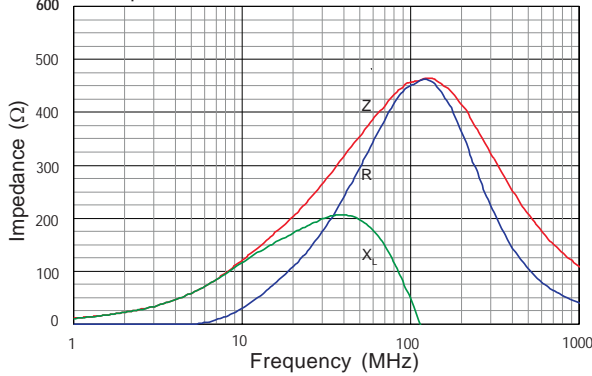

**MI1206L501R-00**

Z vs. Frequency


Impedance Under DC Bias

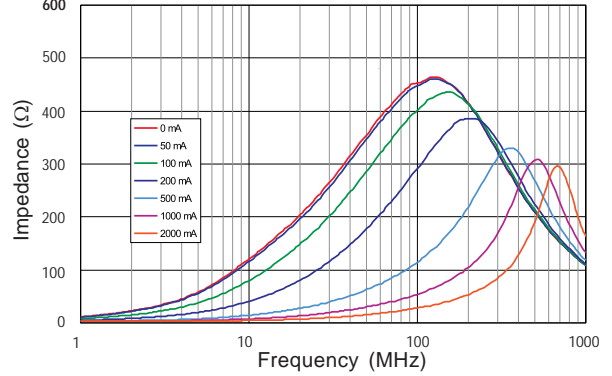

**MI1806J800R-00**

Z, R,  $X_L$  vs. Frequency


Impedance, Resistance, Inductive Reactance


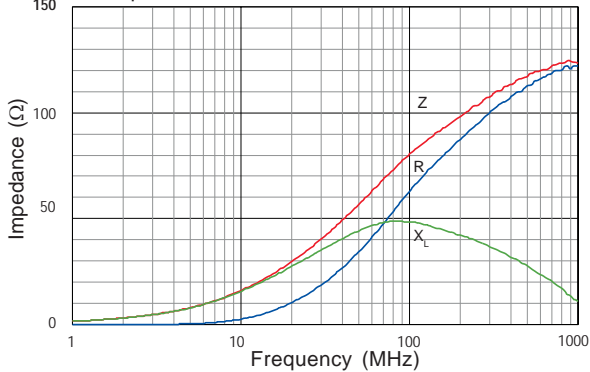


**MI1806J800R-00**

Z vs. Frequency


Impedance Under DC Bias

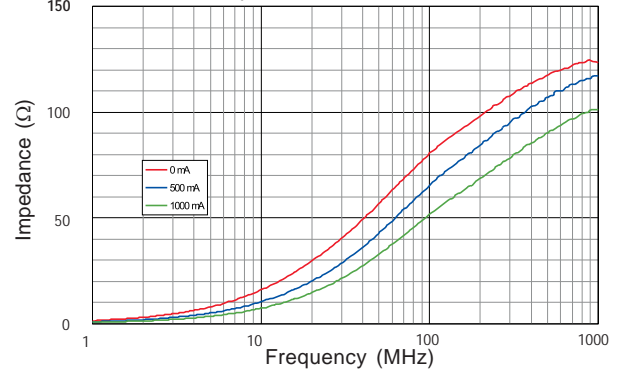

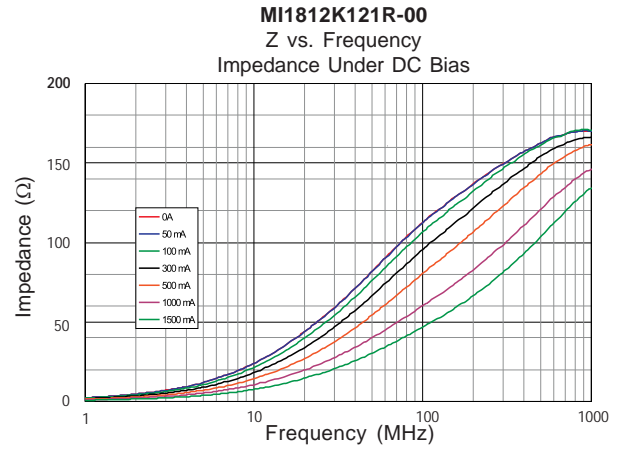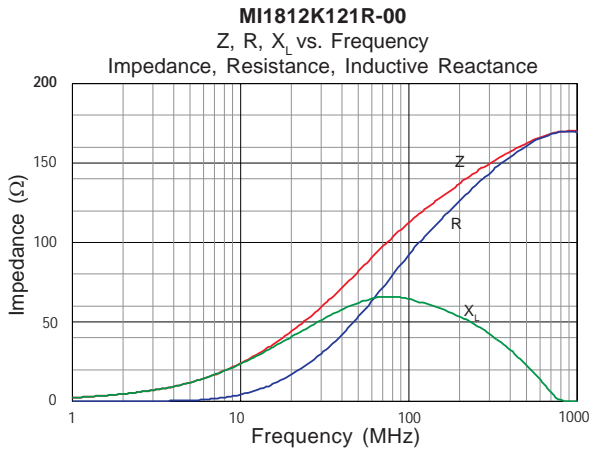

# Tape & Reel Specifications

MI Tape Specifications															
P/N	A	A <sub>0</sub>	B	B <sub>0</sub>	C	D	D <sub>0</sub>	E	F	F <sub>0</sub>	F <sub>1</sub>	G	H	T	Reel Size
MI0603	2.21 (0.087)	1.88 ± 0.10 (0.074 ± 0.004)	3.76 (0.148)	3.56 ± 0.10 (0.140 ± 0.004)	1.91 ± 0.10 (0.075 ± 0.004)	3.50 ± 0.05 (0.138 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.00 ± 0.25 (0.039 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	8.00 ± 0.30 / - 0.10 (0.315 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.25 ± 0.013 (0.010 ± 0.0005)	7"
MI0805	1.85 (0.073)	1.55 ± 0.10 (0.061 ± 0.004)	2.49 (0.098)	2.31 ± 0.10 (0.091 ± 0.004)	1.30 ± 0.10 (0.051 ± 0.004)	3.50 ± 0.05 (0.138 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.00 ± 0.25 (0.039 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	8.00 ± 0.30 / - 0.10 (0.315 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.25 ± 0.013 (0.010 ± 0.0005)	7"
MI0805K	1.85 (0.073)	1.55 ± 0.10 (0.061 ± 0.004)	2.49 (0.098)	2.31 ± 0.10 (0.091 ± 0.004)	1.91 ± 0.10 (0.051 ± 0.004)	3.50 ± 0.05 (0.138 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.00 ± 0.25 (0.039 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	8.00 ± 0.30 / - 0.10 (0.315 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.25 ± 0.013 (0.010 ± 0.0005)	7"
MI1206	2.21 (0.087)	1.88 ± 0.10 (0.074 ± 0.004)	3.76 (0.148)	3.56 ± 0.10 (0.140 ± 0.004)	1.40 ± 0.10 (0.055 ± 0.004)	3.50 ± 0.05 (0.138 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.00 ± 0.25 (0.039 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	8.00 ± 0.30 / - 0.10 (0.315 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.25 ± 0.013 (0.010 ± 0.0005)	7"
MI1206K	2.21 (0.087)	1.88 ± 0.10 (0.074 ± 0.004)	3.76 (0.148)	3.56 ± 0.10 (0.140 ± 0.004)	1.91 ± 0.10 (0.075 ± 0.004)	3.50 ± 0.05 (0.138 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.00 ± 0.25 (0.039 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	8.00 ± 0.30 / - 0.10 (0.315 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.25 ± 0.013 (0.010 ± 0.0005)	13"
MI1206L	2.21 (0.087)	1.88 ± 0.10 (0.074 ± 0.004)	3.76 (0.148)	3.56 ± 0.10 (0.140 ± 0.004)	1.10 ± 0.10 (0.043 ± 0.004)	3.50 ± 0.05 (0.138 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.00 ± 0.25 (0.039 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	8.00 ± 0.30 / - 0.10 (0.315 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.25 ± 0.013 (0.010 ± 0.0005)	13"
MI1806	2.46 (0.097)	1.98 ± 0.10 (0.078 ± 0.004)	5.23 (0.206)	4.88 ± 0.10 (0.192 ± 0.004)	1.98 ± 0.10 (0.078 ± 0.004)	5.50 ± 0.05 (0.217 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	1.50 ± 0.25 (0.059 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	12.00 ± 0.30 / - 0.10 (0.472 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.29 ± 0.013 (0.011 ± 0.0005)	7"
MI1812	3.99 (0.157)	3.51 ± 0.10 (0.138 ± 0.004)	5.08 (0.200)	4.78 ± 0.10 (0.188 ± 0.004)	1.73 ± 0.10 (0.068 ± 0.004)	5.50 ± 0.05 (0.217 ± 0.002)	1.75 ± 0.10 (0.069 ± 0.004)	8.00 ± 0.10 (0.315 ± 0.004)	1.50 ± 0.25 (0.059 ± 0.010)	2.00 ± 0.05 (0.079 ± 0.002)	1.50 ± 0.10 (0.059 ± 0.004)	12.00 ± 0.30 / - 0.10 (0.472 ± 0.012 / - 0.004)	4.00 ± 0.10 (0.157 ± 0.004)	0.29 ± 0.013 (0.011 ± 0.0005)	13"

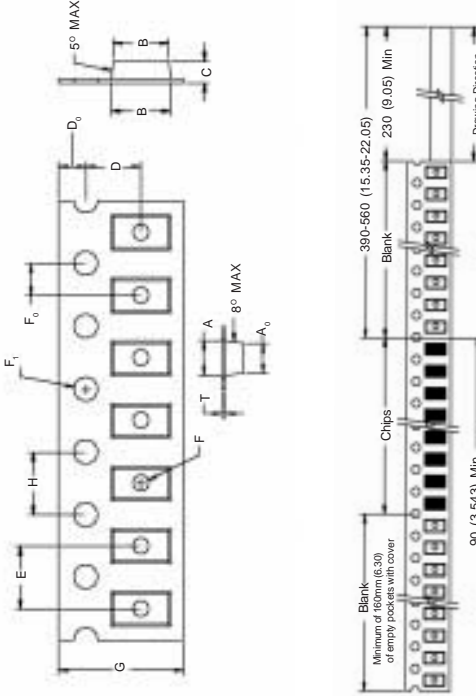

Reel Specifications	
A	330.0 / 178.0 ± 2.0 (13.00 / 7.00 ± 0.078)
B	95.0 ± 1.0 (3.74 ± 0.039)
C	13.0 ± 0.5 (0.51 ± 0.020)
D	21.0 ± 0.8 (0.82 ± 0.031)
E	2.0 ± 0.5 (0.08 ± 0.020)
W	8.0 ± 1.0 (0.32 ± 0.039)
T	1.0 (0.039)

