

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTES020150](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

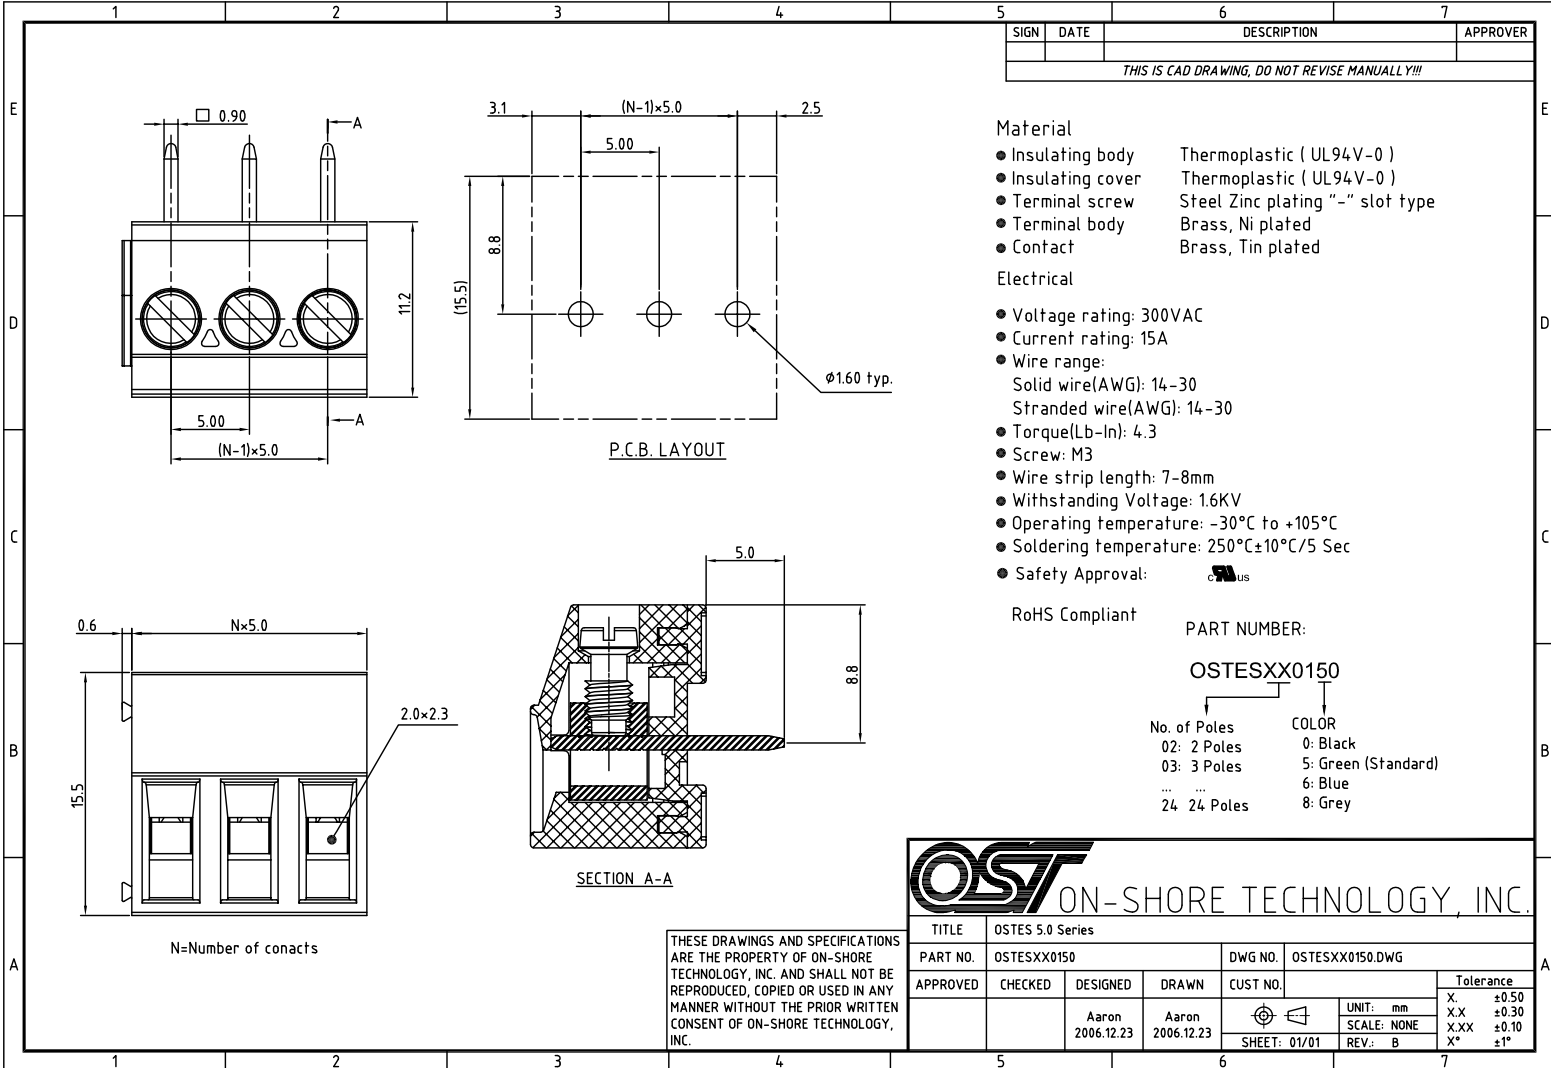

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material**
- Insulating body Thermoplastic (UL94V-0)
 - Insulating cover Thermoplastic (UL94V-0)
 - Terminal screw Steel Zinc plating "--" slot type
 - Terminal body Brass, Ni plated
 - Contact Brass, Tin plated

- Electrical**
- Voltage rating: 300VAC
 - Current rating: 15A
 - Wire range:
 - Solid wire(AWG): 14-30
 - Stranded wire(AWG): 14-30
 - Torque(Lb-In): 4.3
 - Screw: M3
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval: US

RoHS Compliant

PART NUMBER:
OSTESXX0150

No. of Poles	COLOR
02: 2 Poles	0: Black
03: 3 Poles	5: Green (Standard)
...	6: Blue
24: 24 Poles	8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

OST ON-SHORE TECHNOLOGY, INC.					
TITLE	OSTES 5.0 Series				
PART NO.	OSTESXX0150				
DWG NO.	OSTESXX0150.DWG				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Aaron 2006.12.23	Aaron 2006.12.23		X: +0.50 X.X: +0.30 X.XX: +0.10 X*: ±1°
				UNIT: mm SCALE: NONE	
				SHEET: 01/01	REV: B