

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Laird Technologies EMI](#)  
[2240-.25](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

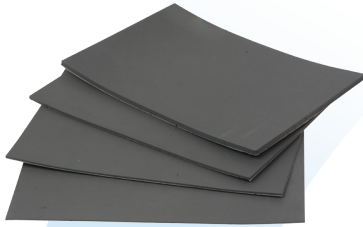


Q-ZORB PN 2240, RFSW-S-060-FR-PSA is a flexible elastomeric magnetic absorbing material. The material is designed to perform well for surface current attenuation. It can be used to lower the Q of cavities and reduce EMI. It is easily bonded using contact adhesives or it can be supplied with a pressure sensitive acrylic adhesive (PSA).

**FEATURES AND BENEFITS**

- Extremely tough and flexible
- Can be die-cut to a variety of shapes and components
- Supplied with pressure sensitive adhesive for ease of installation
- Designed for good surface current attenuation for broadband applications
- Useful in cavities to lower the Q and reduce suppress electromagnetic interference
- Performs well in millimeter wave applications
- Well suited to outdoor applications
- Useful for antenna interference reduction
- Withstands direct exposure to environment

**SPECIFICATIONS**

| TYPICAL PHYSICAL PROPERTIES |  |
|-----------------------------|--|
|                             | 2240 24" x 24" (Standard)                    |
| Size                        | 2240 -.25 12" x 12"                          |
|                             | 2240 - S 4" x 6"                             |
| Thicknesses Available       | 0.060" nominal                               |
| Weight                      | 1.2 lb/sq ft                                 |
| Temperature Range           | 350 °F<br>300 °F w/PSA                       |
| Electrical Performance      | Excellent for surface current attenuation    |
| Color                       | Gray   |
| Environmental               | Good general weather and chemical resistance |
| Bonding                     | Bond with contact adhesives or PSA           |
| Fire Retardant Rating       | UL-V0  |

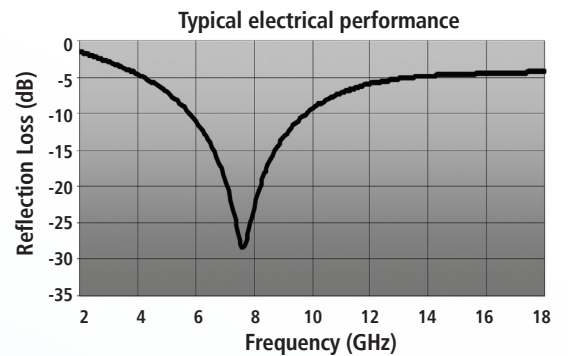

**NOTES**

The physical properties and electrical performance property above are typical for the material, but not intended for use in specifications or for the acceptance inspection criteria because of variations in testing methods, conditions and configurations

global solutions: local support™

USA: +1.866.928.8181  
 Europe: +49.0.8031.2460.0  
 Asia: +86.755.2714.1166

EMI-DS-PN-2240 0711