

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTYK40102030](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

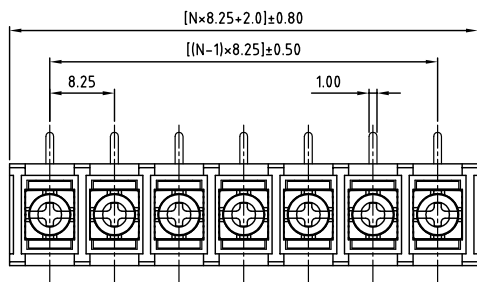

N=Number of poles

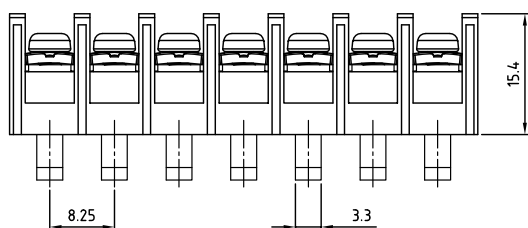

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

SPECIFICATIONS


VOLTAGE & CURRENT:	300 V, 20 A
WITHSTANDING VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
TEMPERATURE RANGE:	-40 °C ~ +105 °C
SCREW TORQUE VALUE:	7 Lb-In.
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	THERMOPLASTIC, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, Ni PLATED, M3

APPROVAL: us

RoHS Compliant

PART NUMBER: OSTYK401XX030

NO. OF POLES
02: 2 POLES
03: 3 POLES
04: 4 POLES
:
30: 30 POLES

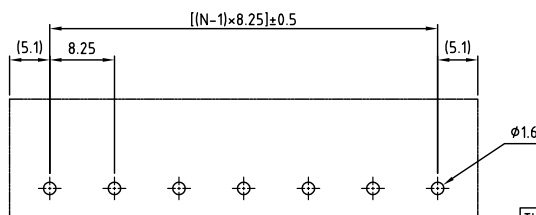

P.C.B LAYOUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYK-401 W/O Flange& W/O Cover Series	
PART NO.	OSTYK401XX030	DWG NO.	OSTYK401XX030.DWG
APPROVED	Shi Jun 2007.07.18	CHECKED	Seamus 2007.07.18
DESIGNED	LUCY 2007.7.18	DRAWN	LUCY 2007.7.18
CUST NO.		UNIT:	mm
		SCALE:	NONE
		SHEET:	01/01
		REV.:	B
		Tolerance	X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*