

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)
[SL18 30006](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	18.0	± 1
T:	6.5	± Max
Lead Diameter	1.0	± Nom
S:	7.8	± Nom
L:	38.0	± 5
Coating Lead Run Down (straight Leads)	3.0	± M
B:		±
C:		±

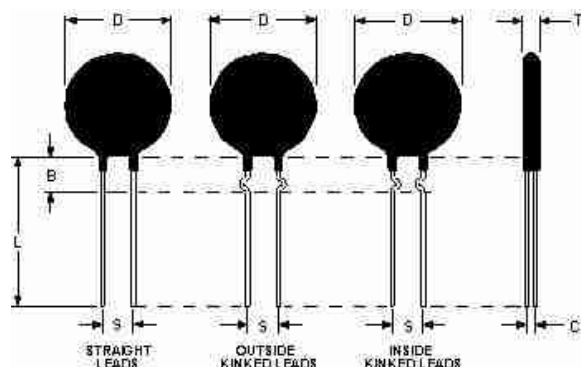

Electrical Specifications

Resistance:	30.0 Ω	± 25 %
Max Steady State Current upto 65°C:	6.00	A
Max Rec. Energy Rating:	65	J
Actual Failure Instantaneous Energy:		J
Maximum Capacitance @ 120 VAC:	4,500	µf
Maximum Capacitance @ 240 VAC:	1,125	µf
Resistance @ 100% Max Current:	0.15	Ω
Resistance @ 50% Max Current:	0.31	Ω
Body Temperature at 100% Max Current:		°c
Dissipation Constant:	18.0	mw/°c
Thermal Time Constant:	40	Sec.
Material Type (for Beta and Curve):		

SL18 30006	
Date: 03/15/2011	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A