

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Littelfuse](#)
[0252002.M](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

| CATALOG No. | AMP (NOTE 1) | VOLTS |
|-------------|--------------|-------|
| 0252.062 | 1/16 | 125 |
| 0252.125 | 1/8 | 125 |
| 0252.250 | 1/4 | 125 |
| 0252.375 | 3/8 | 125 |
| 0252.500 | 1/2 | 125 |
| 0252.750 | 3/4 | 125 |
| 0252001 | 1 | 125 |
| 025201.5 | 1 1/2 | 125 |
| 0252002 | 2 | 125 |
| 025202.5 | 2 1/2 | 125 |
| 0252003 | 3 | 125 |
| 025203.5 | 3 1/2 | 125 |
| 0252004 | 4 | 125 |
| 0252005 | 5 | 125 |
| 0252007 | 7 | 125 |
| 0252010 | 10 | 125 |
| 0252012 | 12 | 32 |
| 0252015 | 15 | 32 |

| ELECTRICAL CHARACTERISTICS | | | |
|----------------------------|--------------------------|-------------------|----------------------------|
| % OF AMPERAGE RATING | CLEARING TIME 7A & LOWER | CLEARING TIME 10A | CLEARING TIME 12A & HIGHER |
| 100% | 4 HRS. MIN. | 4 HRS. MIN. | 4 HRS. MIN. |
| 200% | 1 SEC. MAX. | 3 SEC. MAX. | 10 SEC. MAX. |

NOTES:

- UL RECOGNIZED THRU 15A & CSA CERTIFIED. INTERRUPTING CAPACITY TO 300A DC AT 125V, 50A AC AT 125V
- MATERIALS:
 BODY - GLASS
 COATING - INSULATING EPOXY
 LEADS - SOLDER COATED COPPER
- TO BE STAMPED WITH L/F & AMPERAGE ON 2 OPPOSITE SIDES.

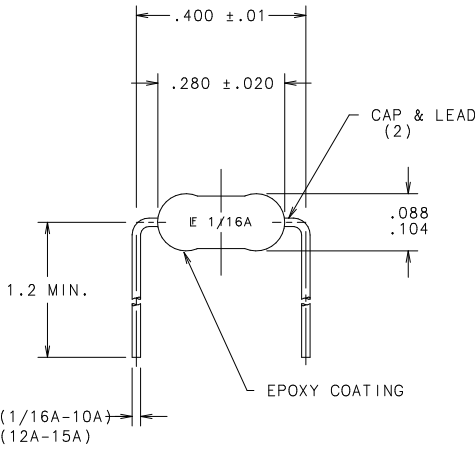

| BILL OF MATERIAL | | FINISH | |
|------------------|-----------|--------------------|--------------------------------------|
| COPIES TO | MATL SPEC | SEE NOTE 2 | |
| 1 | DRW | BJJ | DATE 6/11/96 |
| 2 | 10 19 | | SCALE 2:1 |
| 3 | 12 20 | | SUPER DRW |
| 4 | 13 21 | | RAW STK WT |
| 5 | 14 23 | | LIBS/M |
| 6 | 15 33 | | TOLERANCE UNLESS OTHERWISE SPECIFIED |
| 7 | 16 43 | | TWO PLACE DEC ±.01 FRACTION ± |
| 8 | 17 53 | | THREE PLACE DEC ±.005 ANGULAR ±1° |
| TITLE PICO II | | | |
| LTR | | REVISION | |
| N | 37485D | - REVISE & REDRAWN | |
| | 6/11/96 | BJJ | |
| CHK | | APD | |

OUTLINE
 DRAWG. NO. 0252000
 REVISION N
 DES PLAINES, ILLINOIS 60016

CONTROLLED DOCUMENT

CPK DENOTES CP DIMENSIONS - MINIMUM CP VALUE
 UNLESS OTHERWISE SPECIFIED IN DRAWING.
 DIMENSIONS WITH THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING,
 AND ARE FINALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

[SFC] DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION
 OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND
 TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
 UNLESS OTHERWISE SPECIFIED DIMENSIONS DO NOT INCLUDE PLATING.

CPK DENOTES CPK DIMENSIONS - MINIMUM CPK VALUE.