Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

On-Shore Technology, Inc.
OSTVQ211151

For any questions, you can email us directly:
sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



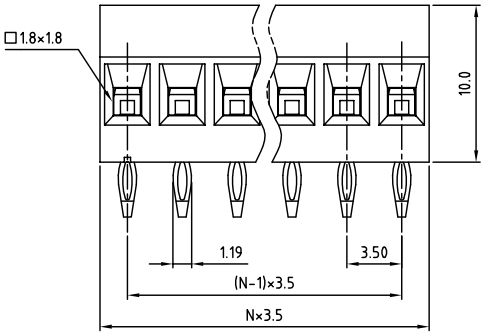

N= Number of poles

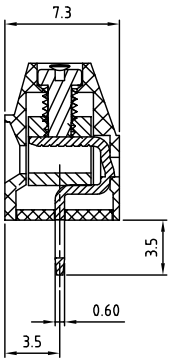

P.C.B. LAYOUT

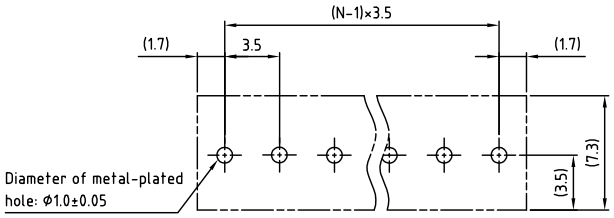

Material:

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating
- Wire guard: Brass (CuZn)
- Surface of solder tail: Tin plated
- Insulator(housing): Thermoplastic (UL94V-0)

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque:	1.7 Lb-In
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6 KV
Operating temperature:	-30°C to +105°C
Soldering temperature:	250°C±10°C/5 Sec

RoHS Compliant

PART NUMBER

OSTVQXX1151

No. of Poles	COLOR:
02: 2 Poles	0: Black
03: 3 Poles	5: Green (Standard)
... ...	6: Blue
24: 24 Poles	8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	OSTVQ 3.5mm series solid block Press Fit with cover 2p-24p				
PART NO.	OSTVQXX1151			DWG NO.	OSTVQXX1151.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
Shi Jun 2006.10.21	Shi Jun 2006.10.21	Tony 2005.07.14	Tony 2005.07.14	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°