

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)

[OSTVO243150](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER



N=NUMBER OF POLES



Material

- Contact: Brass With Tin Plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical


- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C ± 10°C / 5 Sec
- Safety approval: CE, RoHS

RoHS Compliant

PART NUMBER:

OSTVOXX3150

- | | | |
|----------------|---|---------------------|
| No. of Poles | ↓ | COLOR |
| 04: 2x02 Poles | | 0: Black |
| 06: 2x03 Poles | | 5: Green (Standard) |
| : | | 6: Blue |
| 48 2x24 Poles | | 8: Grey |

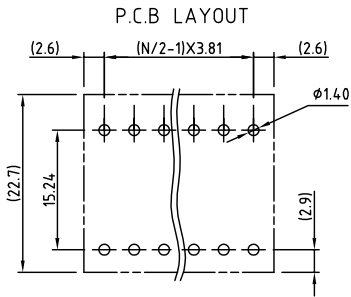

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTVO-3.81mm Series closed vertical 2x2p-2x24p							
PART NO.		OSTVOXX3150			DWG NO.		OSTVOXX3150.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance			
Shi Jun 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23			UNIT: mm SCALE: NONE		X ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1°	
				SHEET: 01/01		REV: D			