

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[122416RP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	04/25/06	INITIAL RELEASE

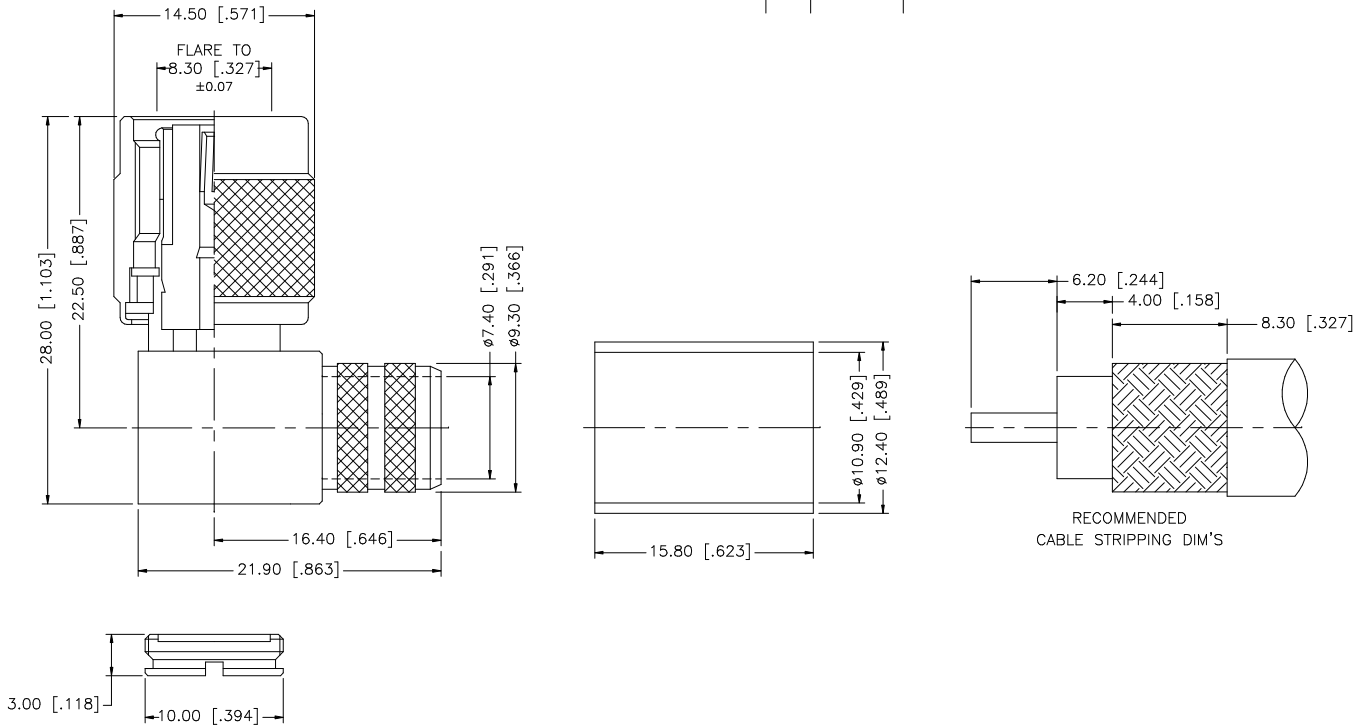

NOTE:
 1. CRIMPED FERRULE - HEX CRIMP SIZE .429"

				APPROVALS	DATE	Amphenol Connex
8				DRAWN	G.R.S.	
7				CHECKED		PART DESCRIPTION TNC REVERSE POLARITY R/A CRIMP PLUG (FOR RG-8/U, 213/U, LMR400, BELDEN 9913,9914)
6				ISSUED		
5	COVER	BRASS	NICKEL	1	SHEET	PART NO. 122416RP
4	FERRULE	COPPER	NICKEL	1		
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	DWG. NO. 122416RP.DWG	REV. NC SIZE A SCALE NA
2	INSULATOR	TEFLON	NATURAL	1		
1	BODY	BRASS	NICKEL	1	CAD FILE C:/122/122416RP.DWG	
DESCRIPTION MATERIAL FINISH QTY				DO NOT SCALE DRAWING		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS; DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .020 - .315 = ± 0.007"
 .315 - 1.180 = ± 0.015"
 1.180 - 4.724 = ± 0.020"