

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTTN081900](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	




Material

- Terminal body (Contact pin): PhBz
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 2A/2A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:  

RoHS Compliant

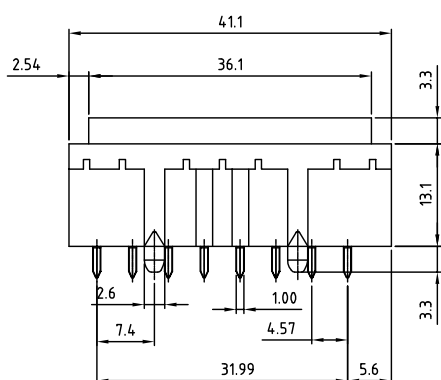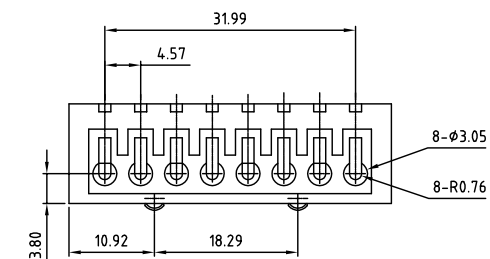

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.									
TITLE	OSTTN-4.57mm Series 8P W/o cover								
PART NO.	OSTTN081900			DWG NO.	OSTTN081900.DWG				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance				
	Marvin 2008.03.13	Marvin 2006.08.21	Marvin 2006.08.21		X ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*				
					UNIT: mm				
					SCALE: NONE				
				SHEET: 01/01	REV: B				