

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[On-Shore Technology, Inc.](#)

[OSTHP245052](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	AWG changed from 20-22 to 18-22AWG(Str/sol)	Lee
△	2009.01.21	CUL approval added	Lee

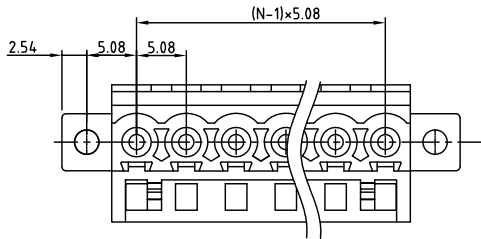

POLE	TOL
2 pole~5 pole	±0.05
6 pole~8 pole	±0.10
9 pole~12 pole	±0.20

MATERIAL

- Terminal Body(Contact pin): PhBz
- With flange screw: steel M2.5 plated zinc
- Insulator (housing): Thermoplastic(UL94V-0)

ELECTRICAL

- Voltage rating: 300V
- Current rating: 8A
- △ ● Wire range:
 - Solid wire(AWG): 18-22
 - Stranded wire(AWG): 18-22
- Wire strip length:
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- △ ● Safety approval: US



RoHS Compliant

PART NUMBER:


OSTHPXX5052

No. of Poles
02: 2 Poles
:
:
12: 12 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey

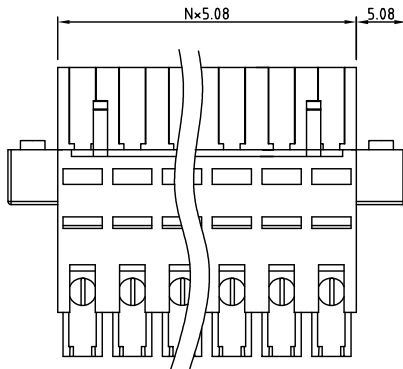

N=Number of poles

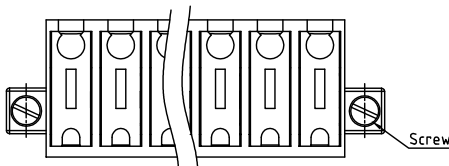

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

		ON-SHORE TECHNOLOGY, INC.	
TITLE: OSTHP 5.08mm Series with flange			
PART NO.	OSTHPXX5052	DWG NO.	OSTHPXX5052.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.11.13	Marvin 2006.11.13	Marvin 2006.11.13	Marvin 2006.11.13
CUST NO.		Tolerance	
		X: ±0.50	
UNIT: mm		X.X: ±0.30	
SCALE: NONE		X.XX: ±0.10	
SHEET: 01/01		REV: D	
		X*: ±1°	