

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[On-Shore Technology, Inc.](#)

[OSTHP243050](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



Technical Data:



Material:

- Terminal Body(Contact pin): PhBz
- Insulator (housing): Thermoplastic(UL94V-0)

Electrical

- Voltage rating: 160V
- Current rating: 6A
- Wire range:
 - Solid wire(AWG): 20-22
 - Stranded wire(AWG): 20-22
- Withstanding Voltage: 1.3KV
- Operating temperature: -30°C to +105°C

RoHS Compliant

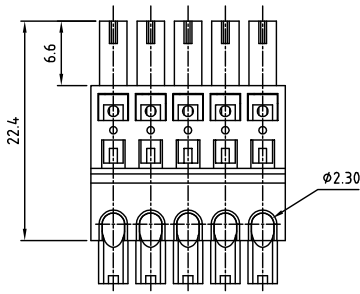

N=Number of contacts

PART NUMBER:

OSTHPXX3050

No. of Poles
02: 2 Poles
:
:
24: 24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTHP 3.81 Series without flange			DWG NO.		OSTHPXX3050.DWG	
PART NO.		OSTHPXX3050		CUST NO.		Tolerance		
APPROVED	CHECKED	DESIGNED	DRAWN	UNIT: mm		X	+0.50	
Shi Jun 2006.11.13	Marvin 2006.11.13	姜開福 2006.01.13	姜開福 2006.01.13	SCALE: NONE		X.X	+0.30	
				SHEET: 01/01		X.XX	+0.10	
				REV.: C		X*	±1°	