



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[PUI Audio, Inc.](#)
[API-4260-LW150-R](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	7 ~ 24	Vdc
RATED CURRENT (MAX)	350	mA
MINIMUM SPL @ 10 CM (1KHz)	100	dBA
RESONANT FREQUENCY	100 ~ 6000	Hz
TONE OR PULSE RATE	REPEATING	0 pulse/sec
OPERATING TEMPERATURE	-20 ~ +60	°C
STORAGE TEMPERATURE	-30 ~ +70	°C
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	LEAD WIRE	-
WEIGHT	30	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
 ©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	1/6/2011	
A	UPDATED NOTE 4 DUE TO MEMORY INCREASE	3/15/2016	B.R.

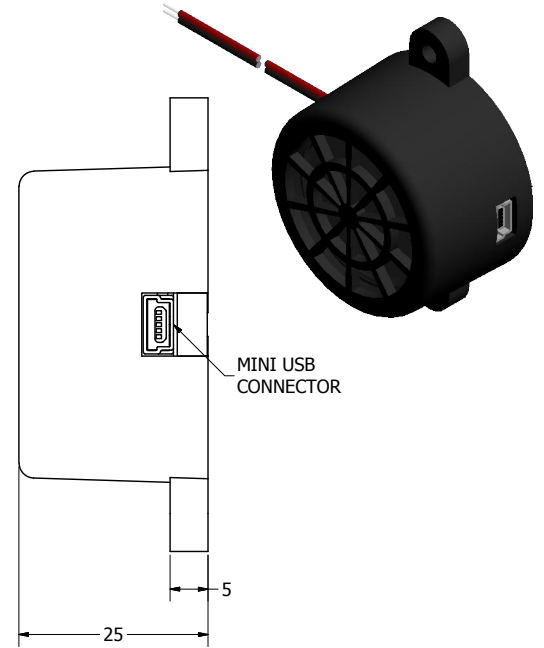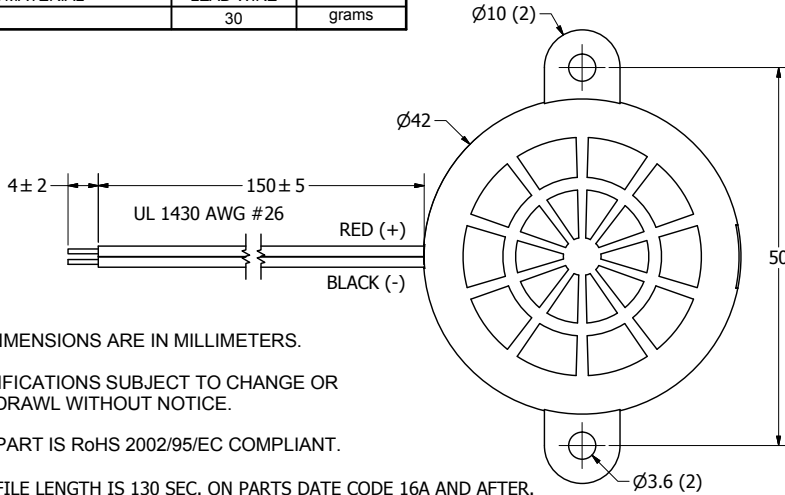

- NOTES:**
- ALL DIMENSIONS ARE IN MILLIMETERS.
 - SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
 - THIS PART IS RoHS 2002/95/EC COMPLIANT.
 - MAX. FILE LENGTH IS 130 SEC. ON PARTS DATE CODE 16A AND AFTER. PARTS DATE CODE 15L AND EARLIER HAVE 33 SEC. MAX FILE LENGTH
 - SAMPLING RATE: 12 KHz
 - CONTINUOUS TONES OF 2KHz AND ABOVE MAY SOUND DISTORTED DUE TO SAMPLING RATE.
 - WORKS WITH WINDOWS 2000, XP, VISTA, WINDOWS 7, 8, AND 10.
 - OPTIONAL USB TO MINI USB CABLE: PUI PART# API-CABLE.
 - PATENT PENDING.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE 45°.	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
	A3	J.D.	1/6/2011	M.L.	3/29/2011	B.R.	3/29/2011	1/6/2011
	API-4260-LW150-R.idw			API-4260-LW150-R Indicator				Edition
							-	1 / 1