

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Samtec, Inc.](#)
[HIC-764-SST](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

REVISION C

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED		TOLERANCES ARE:		TITLE:	DWG NO:
ONE PLACE DECIMALS: ± .1	TWO PLACE DECIMALS: ± .01	THREE PLACE DECIMALS: ± .005	FOUR PLACE DECIMALS: ± .0002	ANGLES	±	HIC ASSEMBLY	HIC-764-SST
							SHEET 1 OF 1

- NOTES:
 1. PUSHOUT TO BE 3 lb. MIN.
 2. PACKAGED IN TUBES - USE PT-1-24-01-34 / TP-07.

HIC-764-SST
 .750 ROW SPACES/64 CONTACTS
 LEAD STYLE
 -S: SOLDER TAIL
 PLATING
 ST: .000010 Au. CONTACT
 .000200 TIN SHELL
 (USE SC-1P2-ST)

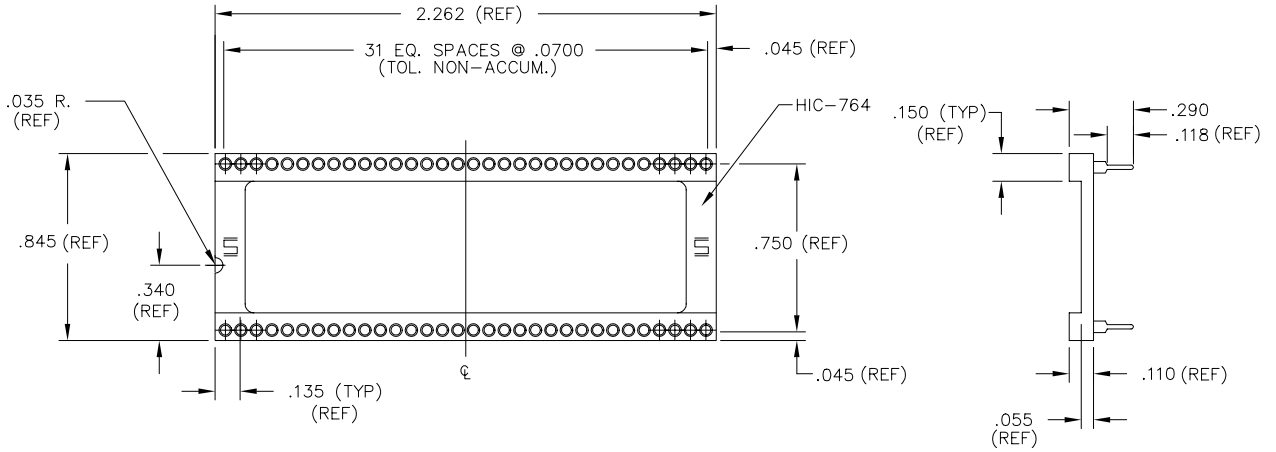

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSES OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
 INSULATOR:
 BLACK GLASS FILLED POLYESTER UL94V-0
 CONTACT:
 BeCu, ALLOY 172 H, FED SPEC. QQ-C-533
 SHELL:
 1/2 HARD BRASS, COMP 22, FED SPEC. QQ-B-626

Samtec MSC/MKT
 HIC-MKT
 520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY: G. PURVIS 7-8-91
 CHECKED BY: BRYANT 7-8-91
 ENGINEER APPROVAL
 PAE HIC-764-SST
 SHEET 1 OF 1