

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Everlight Electronics Co Ltd](#)  
[204-10USOC/S400-A9](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



EVERLIGHT ELECTRONICS CO.,LTD.

# DATA SHEET

PART NO. : 204-10USOC/S400-A9

DATE : 2004/9/28

DEPARTMENT : CHR&D1

REVISION : 1

|   |          |              |          |
|---|----------|--------------|----------|
| <b>RECEIVED</b>                                     |          |              |          |
| <input checked="" type="checkbox"/> MASS PRODUCTION |          |              |          |
| <input type="checkbox"/> PRELIMINARY                |          |              |          |
| <input type="checkbox"/> CUSTOMER DESIGN            |          |              |          |
| DEVICE NUMBER :                                     |          | CDLE-020-768 |          |
| PAGE :  |          | 6            |          |
| CUSTOMER  | DESIGNER | CHECKER      | APPROVER |
|   |          |              |          |

| REV. | DESCRIPTION | RELEASE DATE |
|------|-------------|--------------|

OFFICE: 7C BUILDING, LIAN HUA PORT INDUSTRIAL DISTRICT, LIAN HUA SHAN

BONDED PRICCESSING ZONE PAN YU, GUANG ZHU, CHINA

TEL. : (020)84860913,84860914

FAX : (020)84860600

[http : //www.everlight.com](http://www.everlight.com)




## Technical Data Sheet

### 3.0mm Round Type LED Lamps

#### 204-10USOC/S400-A9

#### ■ Features :

- Choice of various viewing angles
- Available on tape and reel.
- Reliable and robust
- Pb free



#### ■ Descriptions :

- The series is specially designed for applications requiring higher brightness
- The led lamps are available with different colors, intensities,

#### ■ Applications :

- TV set
- Monitor
- Telephone
- Computer


| PART NO.           | Material | Emitted Color       | Lens Color  |
|--------------------|----------|---------------------|-------------|
| 204-10USOC/S400-A9 | AlGaInP  | Super Sunset Orange | Water Clear |



Technical Data Sheet  
 3.0mm Round Type LED Lamps

**204-10USOC/S400-A9**

**Package Dimensions**

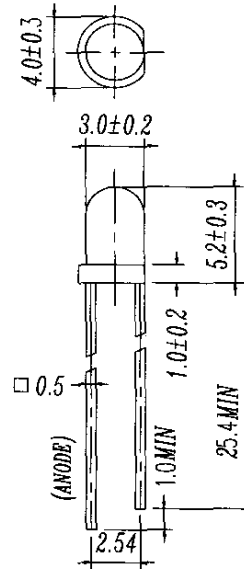

- Notes:**
1. All dimensions are in millimetres
  2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
  3. Tolerances unless Dimension  $\pm 0.25$ mm.

**Absolute Maximum Ratings at Ta = 25°C**

| Parameter               | Symbol   | Rating      | Unit |
|-------------------------|----------|-------------|------|
| Forward Current         | IF       | 50          | mA   |
| Operating Temperature   | Topr     | -40 to +85  | °C   |
| Storage Temperature     | Tstg     | -40 to +100 | °C   |
| Electrostatic Discharge | ESD      | 2000        | V    |
| Soldering Temperature   | Tsol     | 260 ± 5     | °C   |
| Power Dissipation       | Pd       | 120         | mW   |
| Peak Forward Current    | IF(Peak) | 200         | mA   |
| Reverse Voltage         | VR       | 5           | V    |

Note: \*1:IFP Conditions --Pulse Width  $\leq$  1msec and Duty  $\leq$  1/10.  
 \*2:Soldering time  $\leq$  5 seconds.



Technical Data Sheet  
 3.0mm Round Type LED Lamps

**204-10USOC/S400-A9**

**Electro-Optical Characteristics (Ta=25°C)**

| Parameter                    | Symbol         | Condition              | Min. | Typ. | Max. | Unit |
|------------------------------|----------------|------------------------|------|------|------|------|
| Forward Voltage              | V <sub>F</sub> | I <sub>F</sub> = 20 mA | /    | 2.0  | 2.4  | V    |
| Reverse Current              | I <sub>R</sub> | V <sub>R</sub> = 5 V   | /    | /    | 10   | μA   |
| Luminous Intensity           | I <sub>v</sub> | I <sub>F</sub> = 20 mA | 1600 | 3200 | /    | mcd  |
| Viewing Angle                | 2θ 1/2         | I <sub>F</sub> = 20 mA | /    | 20   | /    | deg  |
| Peak Wavelength              | λ <sub>p</sub> | I <sub>F</sub> = 20 mA | /    | 621  | /    | nm   |
| Dominant Wavelength          | λ <sub>d</sub> | I <sub>F</sub> = 20 mA | /    | 615  | /    | nm   |
| Spectrum Radiation Bandwidth | Δλ             | I <sub>F</sub> = 20 mA | /    | 18   | /    | nm   |









# Technical Data Sheet

## 3.0mm Round Type LED Lamps

### 204-10USOC/S400-A9

#### ■ Typical Electro-Optical Characteristic Curves:

( U S O )

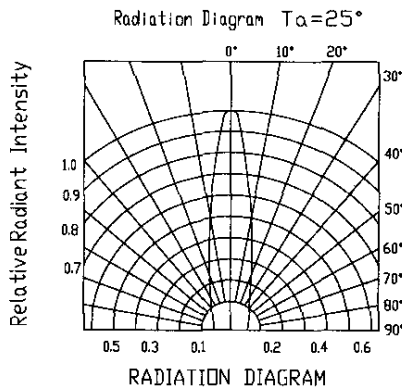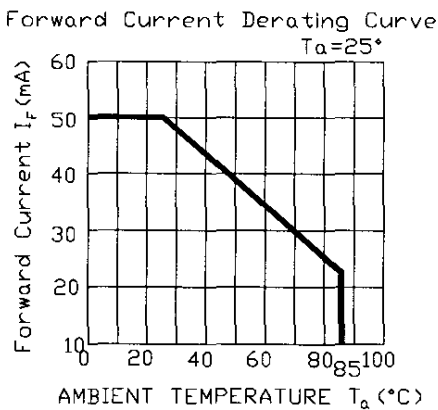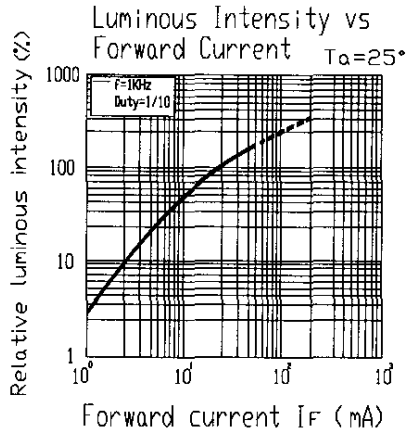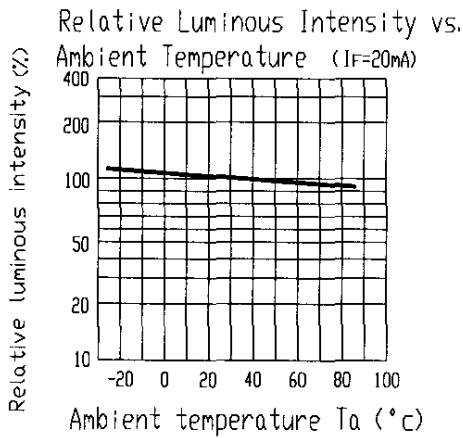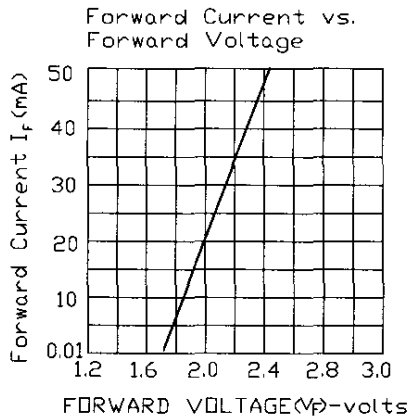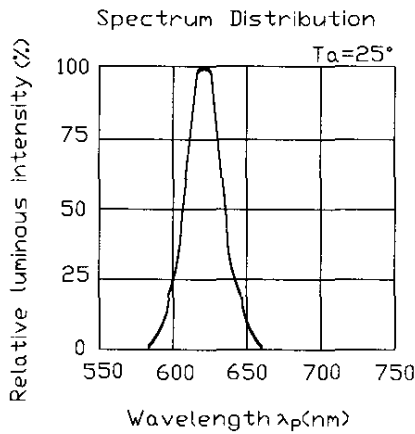



Technical Data Sheet  
 3.0mm Round Type LED Lamps

**204-10USOC/S400-A9**

■ Reliability test items and conditions:

| NO | Item                             | Test Conditions                                | Test Hours/Cycle | Sample size | Ac/Re |
|----|----------------------------------|--|------------------|-------------|-------|
| 1  | Solder Heat                      | TEMP : 260°C ± 5 °C                            | 10 SEC           | 76 PCS      | 0/1   |
| 2  | Temperature Cycle                | H : +100°C 15min<br>§ 5 min<br>L : -40°C 15min | 300 CYCLES       | 76 PCS      | 0/1   |
| 3  | Thermal Shock                    | H : +100°C 5min<br>§ 10 sec<br>L : -10°C 5min  | 300 CYCLES       | 76 PCS      | 0/1   |
| 4  | High Temperature Storage         | TEMP : 100°C                                   | 1000 HRS         | 76 PCS      | 0/1   |
| 5  | Low Temperature Storage          | TEMP : -40°C                                   | 1000 HRS         | 76 PCS      | 0/1   |
| 6  | DC Operating Life                | TEMP : 25°C<br>IF = 20mA                       | 1000 HRS         | 76 PCS      | 0/1   |
| 7  | High Temperature / High Humidity | 85°C / 85% RH                                  | 1000 HRS         | 76 PCS      | 0/1   |



**Technical Data Sheet**  
**3.0mm Round Type LED Lamps**

**204-10USOC/S400-A9**

**Packing Quantity Specification**

- 1.1000PCS/1Bag , 4Bags/1Box
- 2.10Boxes/1Carton

**Label Form Specification**



CPN:  
P/N:



204-10USOC/S400-A9

QTY:



CAT:  
HUE:  
REF:

LOT NO: EL



- CPN: Customer's Production Number
- P/N : Production Number
- QTY: Packing Quantity
- CAT: Ranks
- HUE: Peak Wavelength
- REF: Reference
- LOT No: Lot Number
- MADE IN TAIWAN: Production Place

MADE IN TAIWAN

**Notes**

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

**EVERLIGHT ELECTRONICS CO., LTD.**

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
 Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com