

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Qualtek Electronics Corp.](#)
[745W-10/01](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

- A: MATERIAL**
1. HOUSING: THERMOPLASTIC
2. TERMINAL: COPPER ALLOY
B: CHARACTERISTICS:
1. RATING: 16A 250V AC/ 20A 125V AC
2. INSULATION RESISTANCE:>100M OHM 500VDC
3. DIELECTRIC STRENGTH:2000V ONE MINUTE
C: APPROVALS:
UL, CSA,VDE,SEV,SEMKO,FIMKO & NEMKO
D: OPTION GUIDE:

Revision			
Rev.	Description	Date	Approved

PART NO.	ITEM	TERMINAL DIFFERENCE
745W-XX/PP	1+2	Solder Terminal 2.8X0.8 mm
745W-XX/QQ	1+3	Solder Terminal 4.0X0.8 mm
745W-XX/RR	1+4	Quick Con. Terminal 4.8X0.8mm
745W-XX/SS	1+5	Quick Con. Terminal 6.3X0.8mm
XX Panel Thickness (A) in 1/10 mm		
PP: 01,05,09,13,17 QQ:02,06,10,14,18		
RR: 03,07,11,15,19 QQ:04,08,12,16,20		
745W-15/05:Panel thickness 1.5mm terminal 2.8mm		

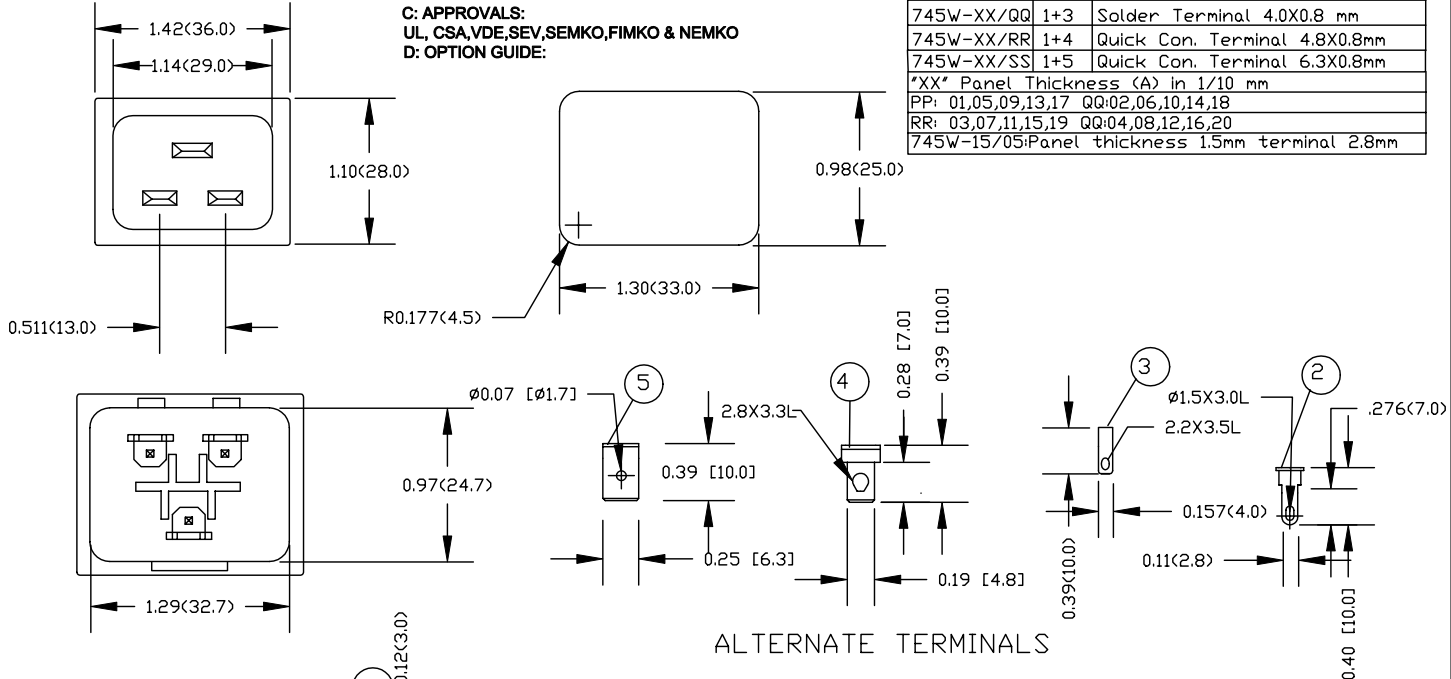

ALTERNATE TERMINALS

Qualtek Electronics Corp. PPC DIVISION		
Part Number: 745W SERIES		
Description: AC RECEPTACLES		
Dim range (mm)	Tolerance +/- (mm)	
0-1	0.15	
1-6	0.20	
6-18	0.30	
18-50	0.50	
50-120	0.70	Drawn/Date
120-250	0.90	K.Huang
250-500	1.20	11-21-98
		Checked/Date
		11-21-98
		Approved/Date
		JJH/11-21-98