

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[PLR155AC-201](#)


For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# RED INDICATES ORIGINAL


DASH NO	CABLES ACCOMMODATED	A HEX	B MAX	ASSEMBLY PER
-201	M17/178-00002	.344	1.77	TAI-188
-202	TWC-78-1			
-203	TWC-124-1A			
-204	1D802, RAYCHEM			
-205	TWAL-78-1F2			
-206	7828D0130, RAYCHEM			
-207	83310 BELDEN			
-208	202-3827 MICRODOT			
-209	202-3842 MICRODOT			
-210	8451 BELDEN			
-211	202-3834 MICRODOT	1.52	TAI-161	
-212	2524E0114, RAYCHEM			
-213	TWC-78-2			
-214	TWC-124-2			
-215	EL-982 TIMES	.344	1.77	TAI-188
-216	EL-1242 TIMES			
-217	GC875T24H, GRUMMAN			
-218	EPD 221888, RAYCHEM			
-219	2528D1114, RAYCHEM			
-220	GC875R81, GRUMMAN			
-221	1D814, RAYCHEM			
-222	1D813, RAYCHEM			
-223	HMS2-1149, HUGHES			
-224	TWCP-124-3			
-225	PS86SPL, PRIME STOCK	1.52	TAI-161	
-301	GC875GC1, GRUMMAN			
-302	S022E8111, RAYCHEM; GC875GB1, GRUMMAN	1.78	TAI-154	
-303	7528A5314, RAYCHEM			
-304		1.78	TAI-154	
-305	M17/177-00001, THERMATICS			
-306	TWC-78-2	1.47	TAI-178	
-307	M17/134-00002			
-308	TRC-75-1	1.78	TAI-154	
-309	TRC-75-2			
-309	TRC-50-1	1.78	TAI-154	

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS, INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR REPRODUCTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.


REV		ED	DESCRIPTION	310-0070	SH 1
H	12388	ADDED	-224 & -225; SEE ECD	DWN   APPROVED   DATE	4-8-98



-201 SHOWN

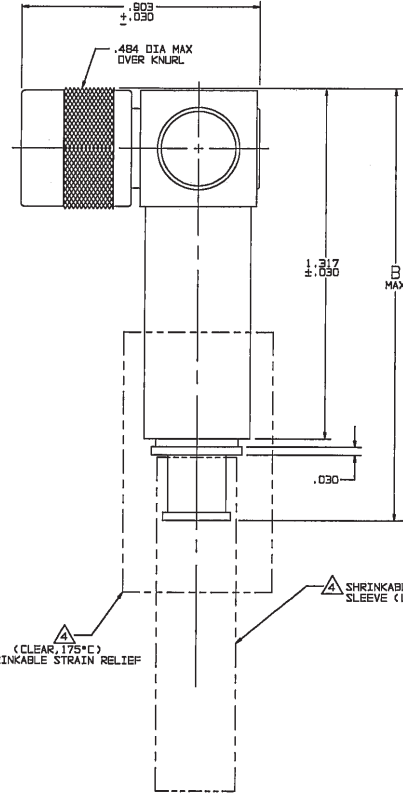

INCH	MM
.005	0.13
.030	0.76
.344	8.74
.484	12.28
.803	20.34
1.00	25.40
1.25	31.75
1.317	33.45
1.47	37.34
1.52	38.61
1.75	44.45
1.78	44.70
1.77	44.86



RECOMMENDED  
 HEX CRIMP  
 SCALE: NONE

1. SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:
- a. CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305, -307 & -309
    - 1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
    - 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)
  - b. CABLE GROUPS -211 THROUGH -216, -306 & -308
    - 1 SHRINKABLE STRAIN RELIEF (1.75 LONG)
2. FINISH: TFS-1A (NICKEL)
3. CONCENTRIC TWIXAX/TRIAX TRS 3-LUG RIGHT ANGLE FULL CRIMP CABLE PLUG
1. ALL DIM ARE IN INCHES

5. EXAMPLE OF COMPLETE MODEL NO:  
 PLR155AC-201  
 BASIC MODEL NO. [ ] CABLE GROUP DASH NO
5. EXAMPLE OF COMPLETE PART NO:  
 310-0070-201  
 BASIC PART NO. [ ] CABLE GROUP DASH NO

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ±.05 .XXX ±.005 .XXXX ANGLE	<b>TROMPETER</b> RF connectivity	PLR155AC	
DWN   DEN   4/3/98	MATERIAL	CODE IDENT	DRAWING NO.
CHK   1/4   4-7-98		14949	310-0070
ENGR   7			REV H
APPR   4-8-98	SCALE 4/1	DATE 4/19/98	SHEET 1 OF 2