

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
V3-2900](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V3-2900

CK-X2948

REPLACES X102480-V3

RELEASE NO. PR-23071

CATALOG LISTING

V3-2900
PAGE 1 OF 1

M

ISSUE
1

CHECK

REVISIONS

CHECK

22 OCT 97

CHECK

DCS



CHECK

15 JUL 97

DRAWN

DCS

DDM/CAD

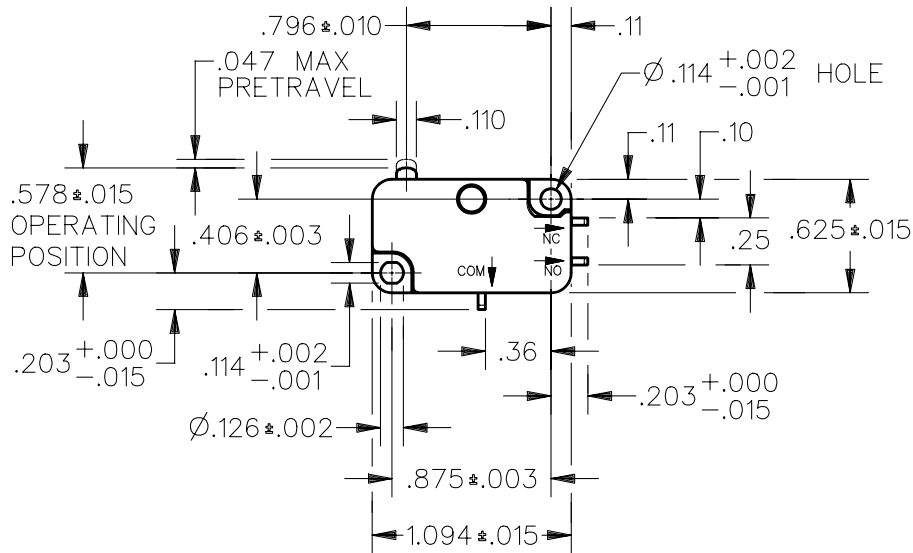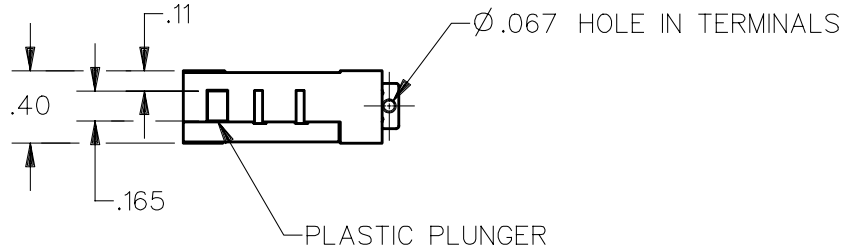


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - MAXIMUM MECHANICAL DEAD BREAK OF .0025 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 125-225 GRAMS
 RELEASE FORCE --- 30 GRAMS MIN
 DIFFERENTIAL TRAVEL --- .010 MAX
 OVERTRAVEL --- .050 MIN
 FREE POSITION --- .625 MAX
 RELEASE TRAVEL --- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

25A, 277 VAC
 1HP, 125 VAC
 2HP, 250 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030
 TWO PLACE (.00) ± .015
 THREE PLACE (.000) ± .005
 ANGLES ±

WEIGHT .015 LB