

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
V3-3120](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH
 a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3-3120

CK-X4134

REPLACES X98343-V3

RELEASE NO. PR-21180

CATALOG LISTING

V3-3120
 PAGE 1 OF 1





ISSUE
 2

CHECK

REVISIONS

A	REL PR21180
	DCS
	9 JUN 94

CHECK

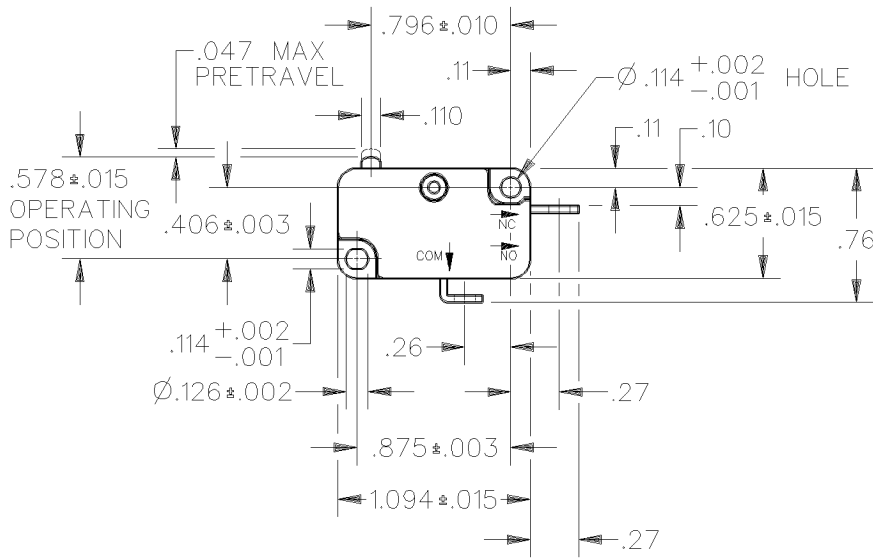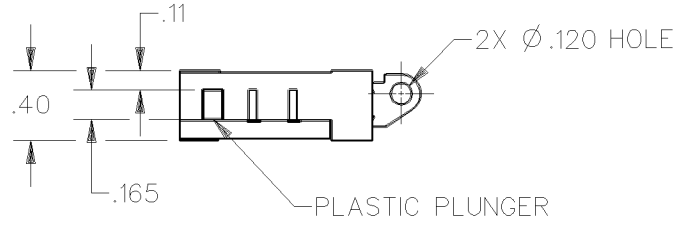


NOTE
 1 - TERMINALS ARE SILVER PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE --- 150 GRAMS MAX	CONTACT ARRANGEMENT S P N C	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE --- 15 GRAMS MIN	L83 15.1A 1/2HP 125, 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL --- .002-.010		TWO PLACE (.00)	±.015
OVERTRAVEL --- .050 MIN		THREE PLACE (.000)	±.005
FREE POSITION --- .625 MAX		ANGLES	±
RELEASE TRAVEL --- .010 MIN		WEIGHT	.016 LB

DDM/CAD
 DRAWN
 DCS 9 MAY 94 CHECK