

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions](#)
[V3L-128](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH
 a Honeywell Division
 FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3L-128
CQ-B2801

REPLACES X110125-V3L

RELEASE NO. PR-23069

CATALOG LISTING
V3L-128
 PAGE 1 OF 1

ISSUE
M
 1

CHECK

REVISIONS

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK


CHECK

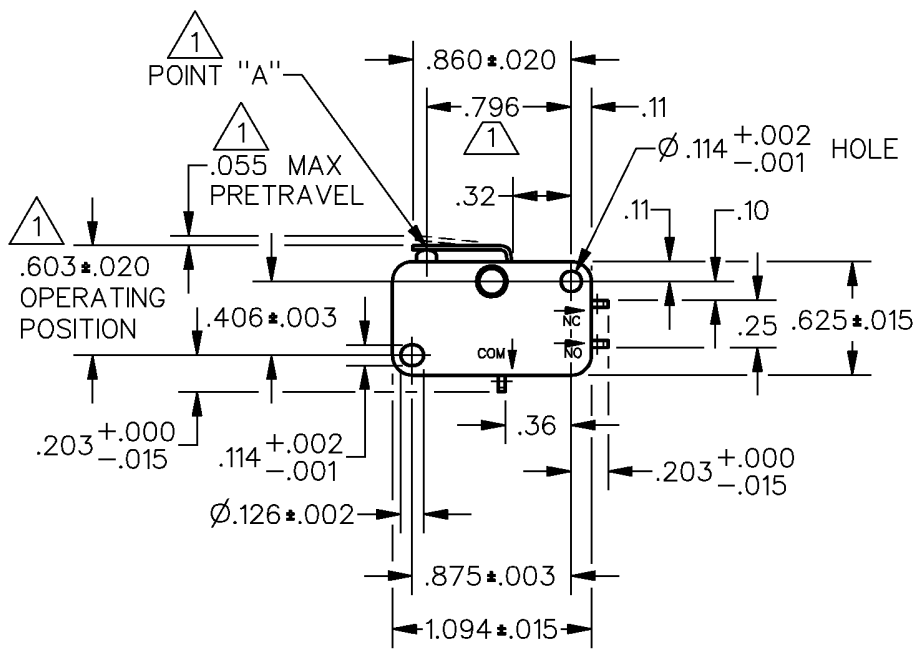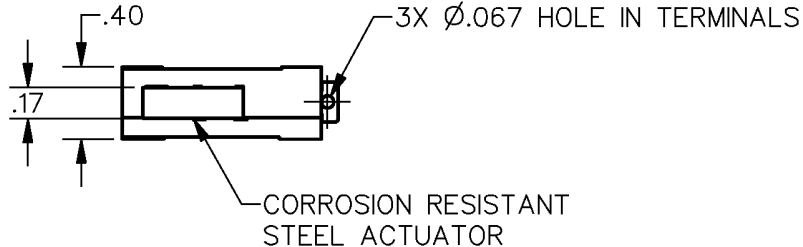

- NOTES
- 1 CHARACTERISTICS MEASURED AT POINT "A"
 - 2 - MAXIMUM MECHANICAL DEAD BREAK OF .0031 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION
 - 3 - IN INSPECTION: DO NOT BURN OUT - GOLD CONTACTS
 - 4 - IN INSPECTION: DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
 - 5 - RESTRICTED LISTING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE --- 181 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE --- 20 GRAMS MIN	L22 1A 125 VAC		
DIFFERENTIAL TRAVEL --- .012 MAX			
OVERTRAVEL --- .032 MIN			
RELEASE TRAVEL --- .007 MIN			



DDM/CAD
 DRAWN
 DCS 26 SEP 97

CHECK
 DCS 26 SEP 97

CHECK
 DCS 26 SEP 97

CHECK
 26 SEP 97

CHECK
 26 SEP 97

CHECK

CHECK

CHECK

CHECK

CHECK