

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions](#)
[V3L-2303](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH
 a Honeywell Division
 FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3L-2303
 CQ-X1612

REPLACES X96891-V3L

RELEASE NO. PR-20345

CATALOG LISTING
V3L-2303
 PAGE 1 OF 1

ISSUE
M
 2

REVISIONS
 A CO 80192
 DCS 17 OCT 95

CHECK

CHECK



22 OCT 92

DCS

CHECK

120 OCT 92


DDM/CAD
 DRAWN

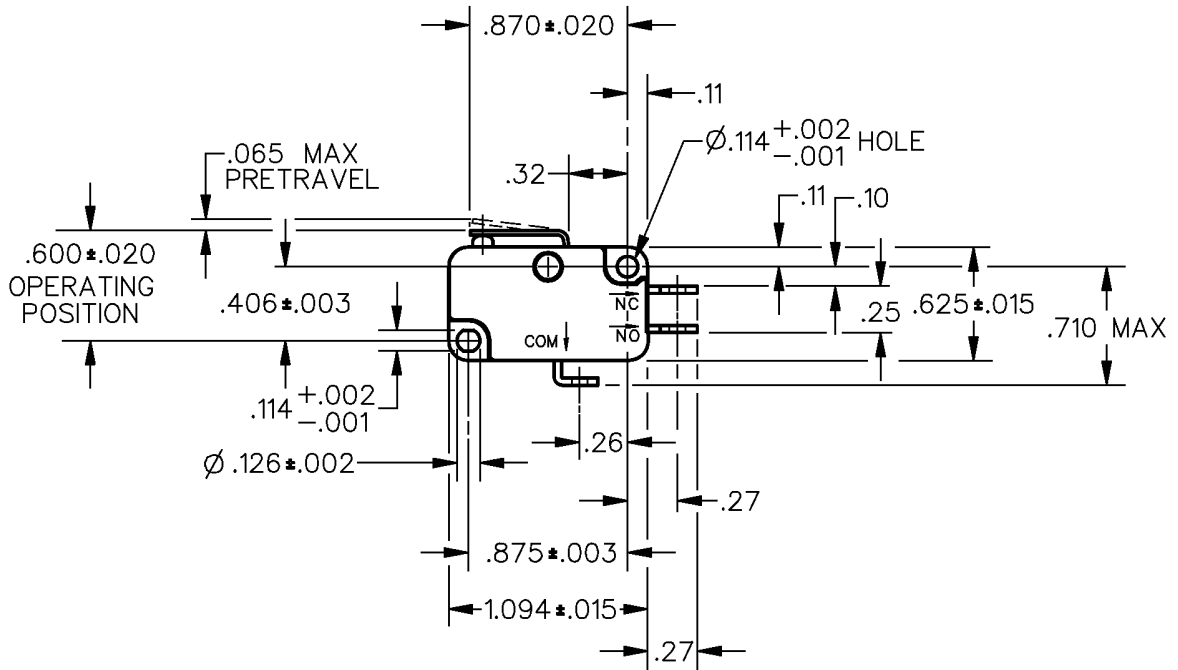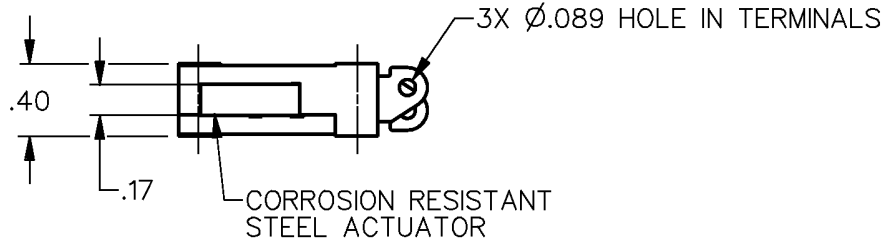

NOTE
 1 - TERMINALS ARE PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 55 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 2 GRAMS MIN	L131		
DIFFERENTIAL TRAVEL — — — .015 MAX	10A 1/4HP 125 OR 250 VAC	ONE PLACE (.0)	± .030
OVERTRAVEL — — — — .030 MIN	1/2A 125 VDC, 1/4A 250 VDC	TWO PLACE (.00)	± .015
RELEASE TRAVEL — — — — .009 MIN	3A 125 VAC "L"	THREE PLACE (.000)	± .005
		ANGLES	±
		WEIGHT	