



Distributor of Molex Connector Corporation: Excellent Integrated System Limited
Datasheet of 0192760005 - Connector Quick Connect Receptacle 14-16 AWG 0.250"
(6.35mm) Crimp

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0192760005](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

| 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 19276 | | | | | | |
|-----------------------------|---------------------------|----------------------------------|--------------------------------|----------------------------|--------------------------|----------------|-----------------------|---------------|--------------|-----------|-----------|----------|-----------|----------|-------------|
| LOOSE PIECE MATERIAL NUMBER | LOOSE PIECE ENGRNG NUMBER | CONTINUOUS STRIP MATERIAL NUMBER | CONTINUOUS STRIP ENGRNG NUMBER | MYLAR TAPE MATERIAL NUMBER | MYLAR TAPE ENGRNG NUMBER | WIRE RANGE AWG | FITS MALE TAB SIZE | HOUSING COLOR | STOCK THICK. | "A" MAX. | "B" MIN. | "C" MAX. | "D" MWID | "E" MAX. | "H" NOMINAL |
| 192760002 | AA-2201-LIF | 192760001 | AA-2201C-LIF | 192760003 | AA-2201T-LIF | 22-18 | .250x.032 (6.35x0.81) | RED | .016/0.41 | .86/21.8 | .058/1.47 | .38/9.7 | .135/3.43 | .18/4.6 | .56/14.2 |
| 192760005 | BB-2206-LIF | 192760004 | BB-2206C-LIF | 192760006 | BB-2206T-LIF | 16-14 | .250x.032 (6.35x0.81) | BLUE | .016/0.41 | .86/21.8 | .083/2.10 | .38/9.7 | .160/4.06 | .18/4.6 | .56/14.2 |
| 192760008 | C-2293-LIF | 192760007 | C-2293C-LIF | 192760009 | C-2293T-LIF | 12-10 | .250x.032 (6.35x0.81) | YELLOW | .018/0.46 | 1.03/26.1 | .117/2.97 | .38/9.7 | .235/5.97 | .22/5.6 | .51/12.9 |

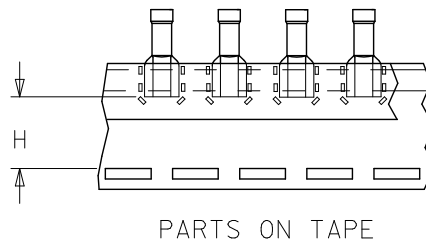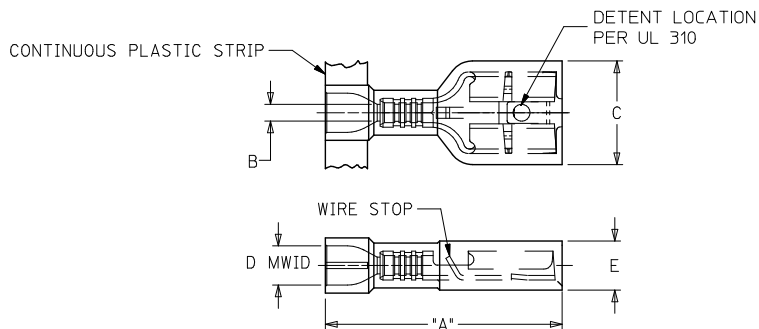

NOTES:

- MATERIALS:
 TERMINAL: MATTE-TIN PLATED BRASS
 INSULATION: NYLON 6/6 94V-2,
 SEE CHART FOR COLORS
- PRODUCT SPECIFICATION: PS-19902-012
- MWID = MAXIMUM WIRE INSULATION DIAMETER
- PARTS ARE ROHS COMPLIANT

SALES DRAWING

| | | | | | | | | | |
|---|--|--|------------|--------------------------|--------------------|--|----------------------|------------------------------|--|
| RELEASE EC NO: WNA2009-0761 DRAWN BY: ETHRODAHL 2010/03/18 CHKD: JMACNEIL 2010/03/18 APPR: JMACNEIL 2011/07/06 REV A | QUALITY SYMBOLS ▽=0 ▽=0 DESCRIPTION | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | | SCALE 1:1 | DESIGN UNITS INCH | THIRD ANGLE PROJECTION | |
| | | 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .010 1 PLACE ± 0.25 ± .020 | mm INCH | DRAWN BY ETHRODAHL | DATE 2010/03/18 | TITLE QUIXON LOW INSERT FORCE FULLY INSUL QUICK DISCNT INSULKRIMP 22-10 AWG | | | |
| | | ANGULAR ±1/2° | | CHECKED BY JMACNEIL | DATE 2010/03/18 | APPROVED BY JMACNEIL | | | |
| | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | APPROVED BY JMACNEIL | DATE 2011/01/06 | MATERIAL NO. SEE CHART | | DOCUMENT NO. SD-19276-001 | |