

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[5005991479](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

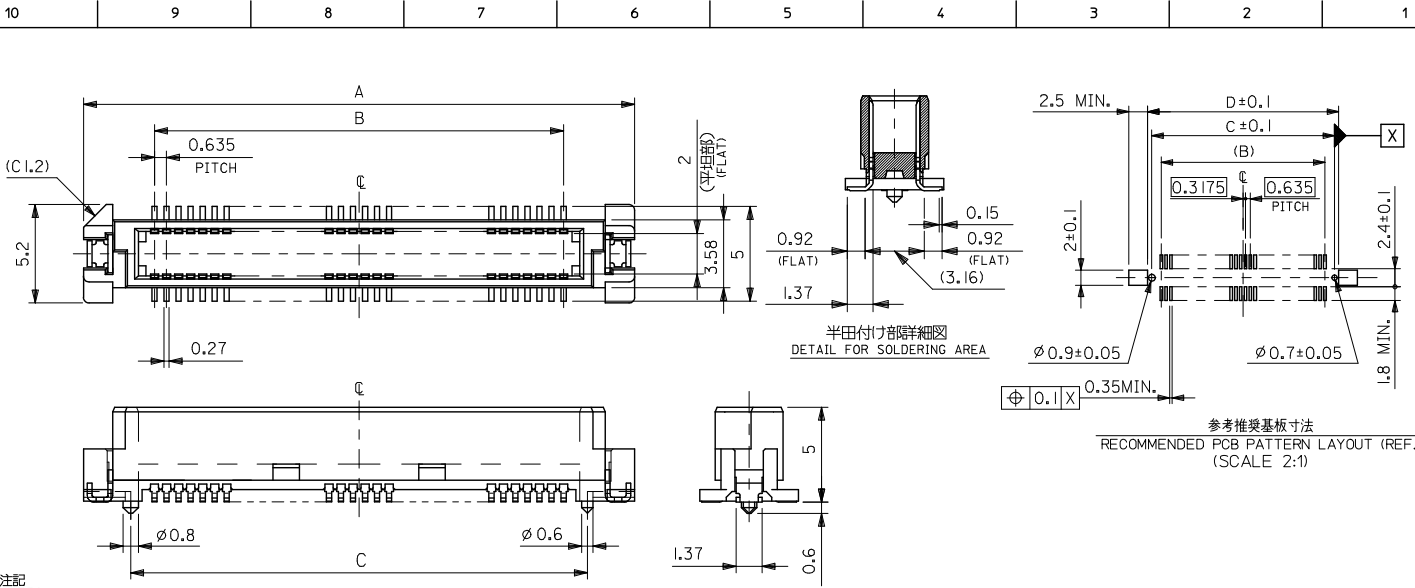

参考推奨基板寸法
RECOMMENDED PCB PATTERN LAYOUT (REF.)
(SCALE 2:1)

注記
NOTES:


1. 材質
MATERIAL
ハウジング: LCP (液晶ポリマー)、ガラス充填、黒色、UL94V-0
HOUSING: LCP (LIQUID CRYSTAL POLYMER), GLASS FILLED, BLACK, UL94V-0
ターミナル: 銅合金 (t=0.2)
TERMINAL: COPPER ALLOY (t=0.2)
ネイル: 銅合金 (t=0.25)
FITTING NAIL: COPPER ALLOY (t=0.25)
2. メッキ仕様
PLATING
ターミナル
TERMINAL
接点部: 金メッキ 0.76マイクロメートル以上
CONTACT AREA: GOLD 0.76 MICROMETER MINIMUM
半田付け部: 鉛メッキ 1.0マイクロメートル以上
SOLDER TAIL AREA: TIN 1.0 MICROMETER MINIMUM
下地メッキ: ニッケルメッキ 1.5マイクロメートル以上
UNDER PLATING: NICKEL 1.5 MICROMETER MINIMUM
ネイル
NAIL
鉛メッキ 1.0マイクロメートル以上
TIN 1.0 MICROMETER MINIMUM
下地メッキ: ニッケルメッキ 1.0マイクロメートル以上
UNDER PLATING: NICKEL 1.0 MICROMETER MINIMUM
3. テールのバラツキ寸法
TAIL COPLANARITY
テール平坦度は、0.1ミリメートル以下。
TAIL COPLANARITY TO BE 0.1 MAXIMUM.

4. 本製品は、500599-***1の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 500599-***1.

47.42	46.32	43.815	51.32	500599-1479	140
9.32	8.22	5.715	13.22	500599-0279	20
D	C	B	A	(TUBE) PACKAGE	極数
オーダー番号 ORDER No.					CIRCUITS
CONNECTOR SERIES No. 500599-***71					

REVISED IEC NO. J2009-2696 DRAWN BY: M. NABEI CHECKED BY: K. TOYODA APPROVED BY: N. UKITA	DESCRIPTION DRAWING NO. 2009/07/02 CHKD: I. HARIYAMA APPR: N. UKITA 2009/07/03	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY M. NABEI	DATE '06/06/08	TITLE 0.635 MM PITCH B/B CONN. PLUG HS'G ASS'Y -LEAD FREE-			
		10 OVER 30 UNDER	±0.25	CHECKED BY K. TOYODA	DATE '06/06/08	MOLEX INCORPORATED			
		30 OVER	±0.3	APPROVED BY N. UKITA	DATE '06/06/08	DOCUMENT NO. SD-500599-003			
ANGULAR ±1 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		SHEET NO. 1 OF 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

10 9 8 7 6 5 4 3 2 1

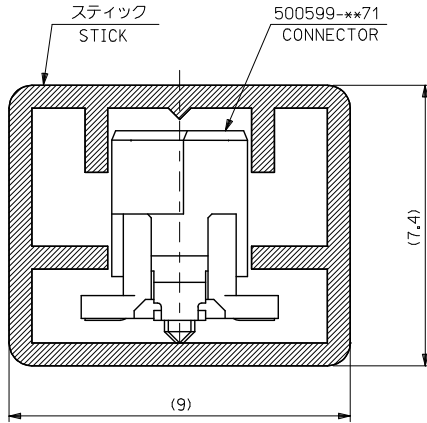

注記
NOTES.

1. スティック両端はキャップ止め。
BOTH ENDS WITH CAPS.
2. 全長: 600±2
TOTAL LENGTH
3. 肉厚: 0.6±0.2
THICKNESS
4. 材料: スティック: ポリ塩化ビニル
MATERIAL STICK: P.V.C.
5. 本製品は、500599-***9 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 500599-***9.

11	500599-1479	140
42	500599-0279	20
梱包数 QUANTITY	(TUBE) PACKAGE オーダー番号 ORDER No.	極数 CIRCUITS

CONNECTOR SERIES No. 500599-**71

REVISED IEC No. J2009-2696 DRAWN: CARIZONO 2009/07/02 CHKD: HARUYAMA 2009/07/03 APPR: UKITA 2009/07/03	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	±---	DRAWN BY M. NABEI	DATE '06/06/08	TITLE 500599-**71 STICK PACKAGING -LEAD FREE- MOLEX INCORPORATED DOCUMENT NO. SD-500599-004 SHEET NO. 1 OF 1		
	10 OVER 30 UNDER	±---	CHECKED BY K. TOYODA	DATE '06/06/08			
	30 OVER	±---	APPROVED BY N. UKITA	DATE '06/06/08			
ANGULAR	±---°	MATERIAL NO.	SEE CHART				
A	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

9 8 7 6 5 4 3 2 1 EN-02JA(021)