

Excellent Integrated System Limited


Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[5016282781](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

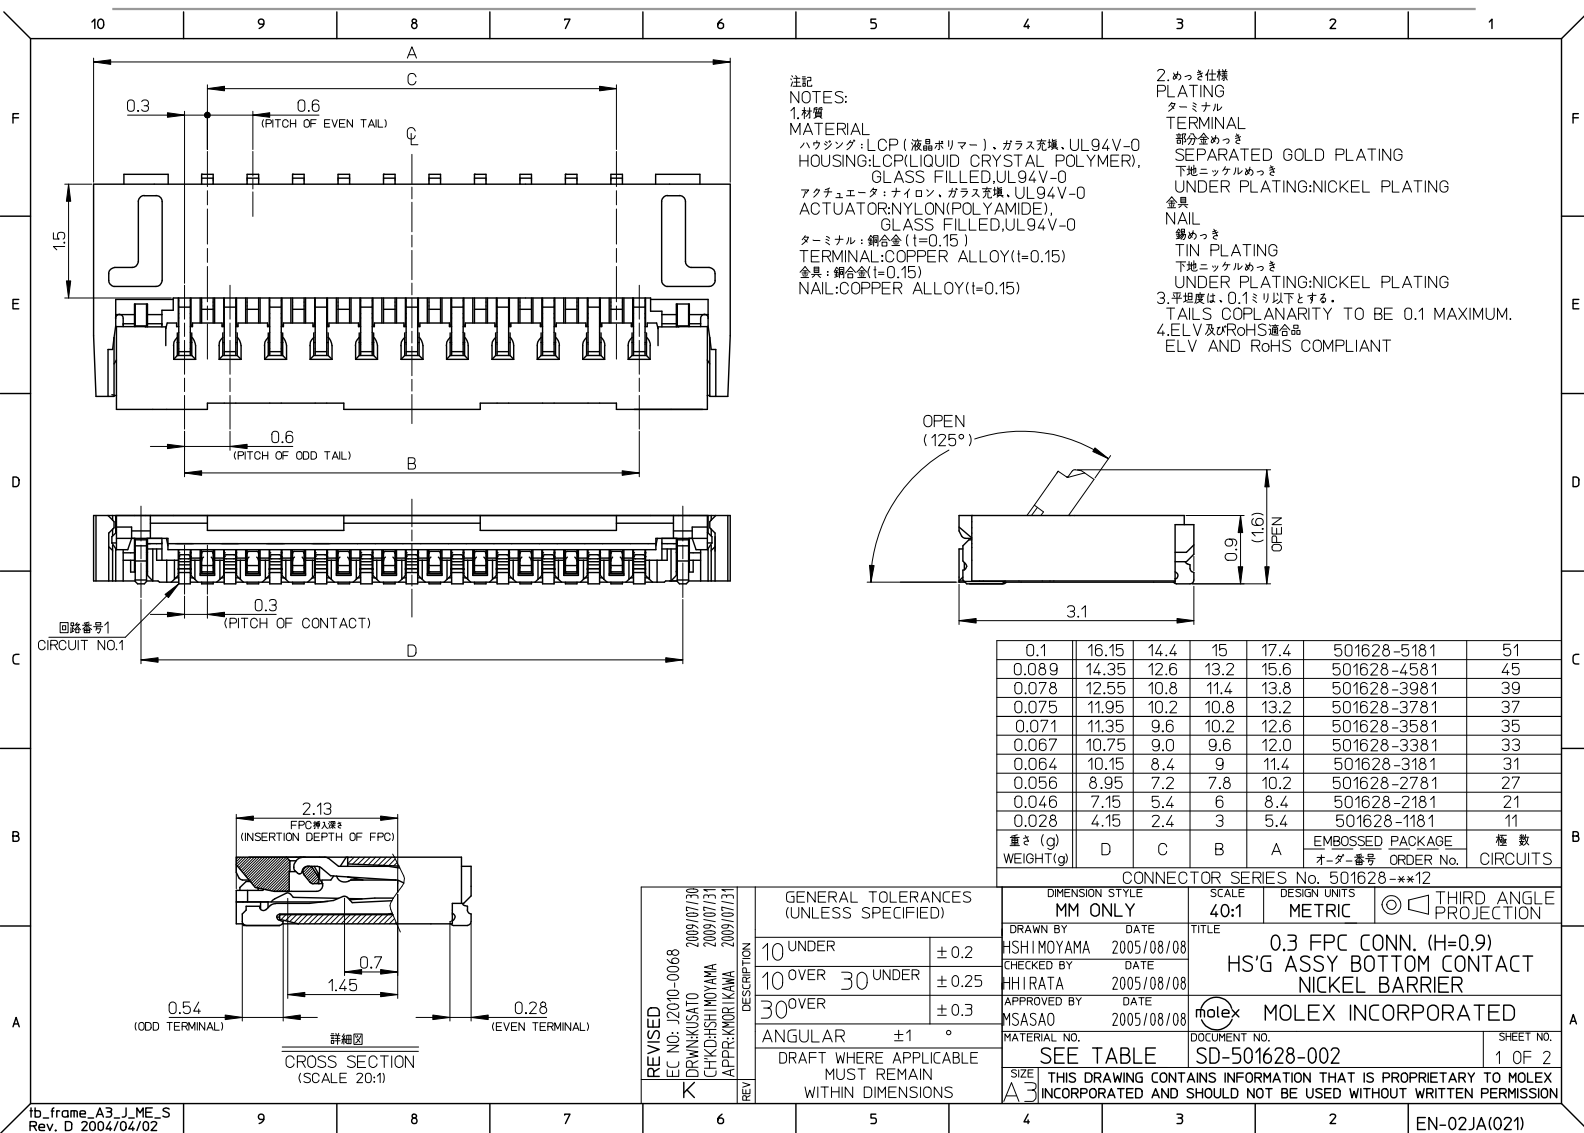


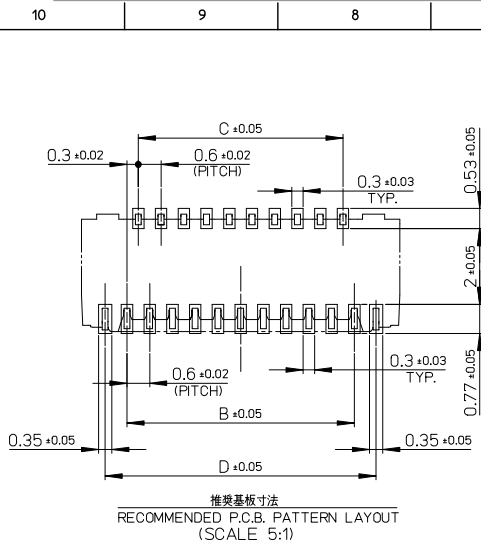

ISO VIEW (参考)

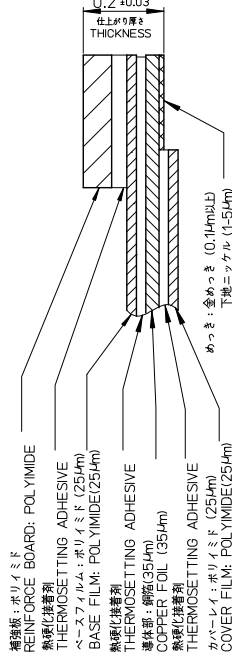

FPC構成仕様仕様
STRUCTURE OF FPC

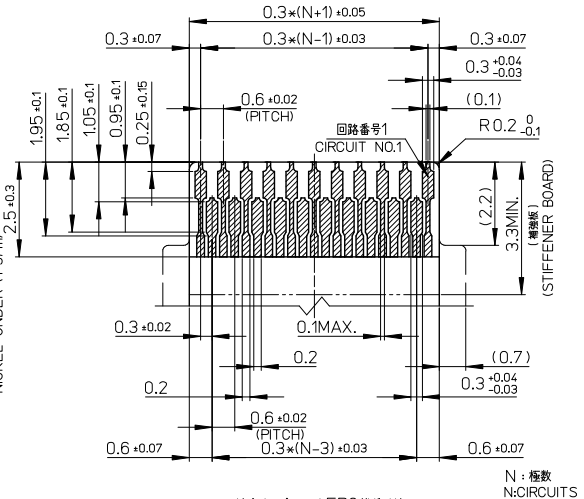

適合する金めっきFPC推奨寸法
APPLICABLE FPC OF GOLD PATING
RECOMMENDED DIMENSION


(仕上がり厚さ: 0.2 ± 0.03)
(THICKNESS: 0.2 ± 0.03)

ABOUT FPC:


RECOMMENDED PUNCHER DIRECTION:
FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.
RECOMMENDED MATERIAL:
STIFFENER FILM: POLYIMIDE
BONDING AGENT: THERMOSETTING AGENT
PLEASE PUT APPROPRIATE AMOUNT OF ADHESIVE ON ADHEREND
BECAUSE THERE IS A POSSIBILITY THAT THE EXTRA ADHESIVE
CAUSES THE DEFECT IN ELECTRICAL CONTINUITY.

FPCについて:
抜き方向は、導体側から補強板側を推奨致します。
補強フィルム材質は、ポリイミドを推奨致します。
接着剤は熱硬化性接着剤を推奨致します。
尚、接着剤の接点部への付着は導通不良の原因になりますので、
ぬみ出しが無い様、お願い致します。


REVISED EC NO: J2010-0068 DRAWN/KO CHKD/HSI MOYAMA APPR/MORIKAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± ---	DRAWN BY HSI MOYAMA	DATE 2005/08/08	TITLE 0.3 FPC CONN. (H=0.9) HS'G ASSY BOTTOM CONTACT NICKEL BARRIER MOLEX INCORPORATED			
		10 OVER 30 UNDER	± ---	CHECKED BY HHIRATA	DATE 2005/08/08				
		30 OVER	± ---	APPROVED BY MSASAO	DATE 2005/08/08				
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-501628-002		2 OF 2	
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

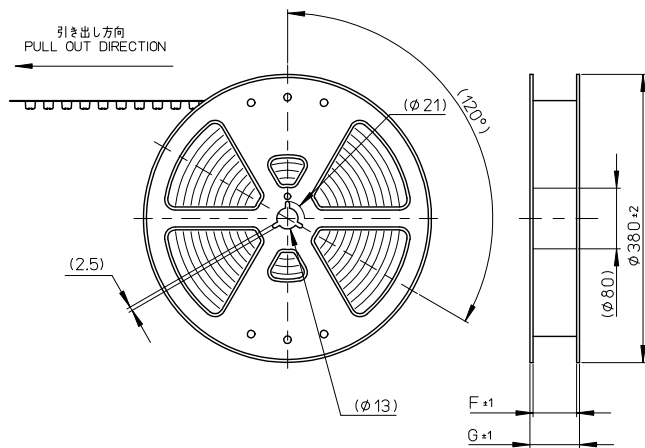注記)
NOTES

- 製品番号501628-**12の詳細寸法は、製品単体図面を参照下さい。
IN THE PACKAGE PART NUMBER 501628-**12 DETAIL DIMENSIONS,
SEE SALES DRAWING FOR CONNECTOR.
- 梱包数量: 3000個/リール
NUMBER OF CONNECTORS: 3000 PCS/REEL
- リードテープ長さ
LEAD TAPE LENGTH

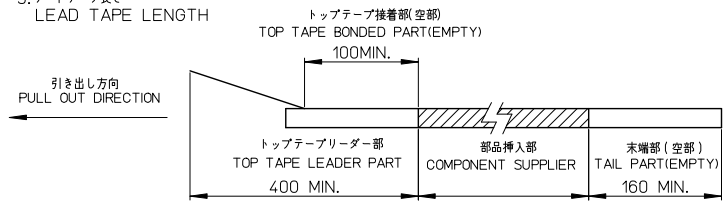

- トップテープの剥離強度 (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE (PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)
0.1-1.3N (10-130gf)
尚、本規格値は出荷時に適用。
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
(但し、輸送時に剥離が発生しないこと)
(PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTION.)

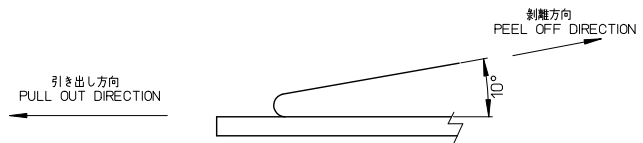

- 材料
MATERIAL
キャリアテープ: ポリスチレン (PS)
CARRIER TAPE: POLYSTYRENE (PS)
トップテープ: PET, PE, PEF
TOP TAPE: PET, PE, PEF
リール: ポリスチレン
REEL: POLYSTYRENE
- ELV及びRoHS適合品
ELV AND ROHS COMPLIANT

REVISED	EC NO. J2010-0068	2009/07/30 DRINKUSATO	2009/07/31 CHIKO HSHI MOYAMA	2009/07/31 APPR: MORIKAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE 0.3 FPC CONN.(FOR 501628 --*12) TAPING PACKAGE NICKEL BARRIER MOLEX INCORPORATED
						10 UNDER	± ---	DRAWN BY HSHI MOYAMA	DATE 2005/08/22	MOLEX			
						10 OVER 30 UNDER	± ---	CHECKED BY HIRATA	DATE 2005/08/22				
						30 OVER	± ---	APPROVED BY MSASAO	DATE 2005/08/22				
						ANGULAR ± --- °		MATERIAL NO. SEE TABLE			DOCUMENT NO. SD-501628-004		
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

