

Excellent Integrated System Limited


Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[5020664093](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



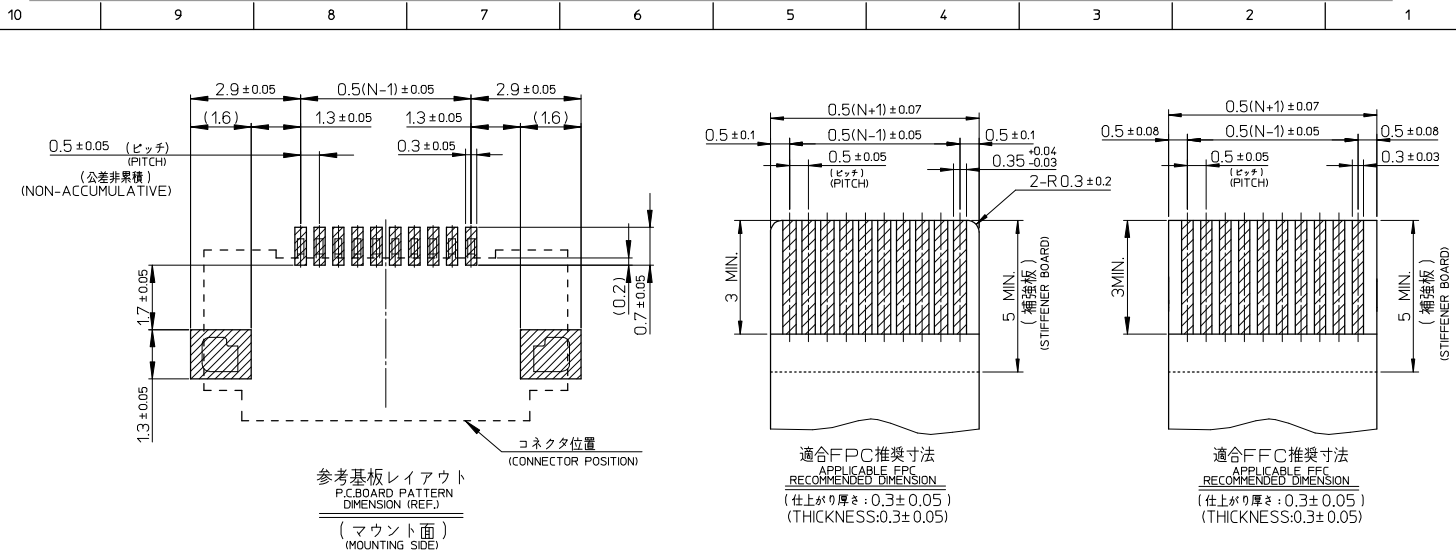

注記 NOTES

1. 使用材料 MATERIAL

ハウジング : 液晶ポリマー ガラス充填, UL94V-0 (ベージュ)
HOUSING : LIQUID CRYSTAL POLYMER GLASS FILLED, UL94V-0 (BEIGE)
アクチュエータ: PPSガラス充填, UL94V-0 (茶)④
ACTUATOR : POLYPHENYLENESULFIDE GLASS FILLED, UL94V-0 (BROWN)
ターミナル : リン青銅 (セ=0.18)
TERMINAL : PHOSPOR BRONZE (t=0.18)
金具 : リン青銅 (セ=0.15)
FITTING NAIL : PHOSPOR BRONZE (t=0.15)

2. メッキ仕様 PLATING

ターミナルTERMINAL
ニッケル下地金めっき
GOLD(Au) OVER NICKEL(INI) PLATING
金具 FITTING NAIL
ニッケル下地金めっき
TIN(Sn) OVER NICKEL(INI) PLATING

3. エンボステープ極包時は、アクチュエータが閉じた状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO.502066-***10 SHOULD BE CLOSED.
4. R0.3 は、FFC 導体部にかからないこと。
R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.

FPC/FFCについて:

打抜き方向は導体側から補強板側を推奨致します。
導体部については軟銅箔35マイクロメートルまたは50マイクロメートルを推奨致します。
ABOUT FPC/FFC
RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.
RECOMMENDED CONDUCTOR SPEC:
THICKNESS OF SOFT COPPER FOIL: 35 MICROMETER OR 50 MICROMETER


FPCについて:

補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。
ベースフィルムは25マイクロメートルを推奨致します。
ABOUT FPC
RECOMMENDED MATERIAL:
STIFFENER FILM: POLYIMIDE
BONDING AGENT: THERMOSETTING BONDING AGENT
RECOMMENDED THICKNESS:
BASE FILM: 25 MICROMETER


SEE SHEET 1	EC NO: Z009-0003 DRAWN:MMAGEI CHKD:THARYAMA APPR:NIKI ITA	2008/07/08 2008/07/09 2008/07/09	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE --	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				10 UNDER	±	DRAWN BY YKOBAYASHI	DATE 02 2006/07/21	TITLE 0.5FPC CONN. ZIF E/O HSG ASS'Y(H=2.5) -LEAD FREE-				
				10 OVER	±	CHECKED BY HIRATA	DATE 2006/07/21	MOLEX MOLEX INCORPORATED				
				30 UNDER	±	APPROVED BY MSASAO	DATE 2006/07/21					
				30 OVER	±	ANGULAR ±1°		MATERIAL NO. SEE SHEET 1			DOCUMENT NO. SD-502066-001	SHEET NO. 2 OF 2
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

10 9 8 7 6 5 4 3 2 1

引き出し方向

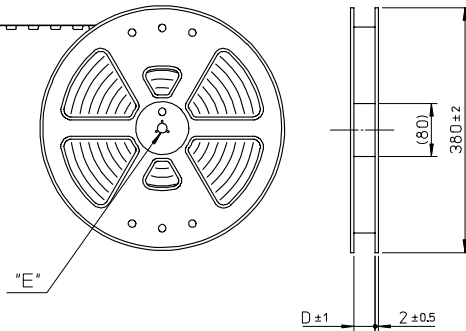
PULL OUT
DIRECTION

"E"



DETAIL "E"

NOTES

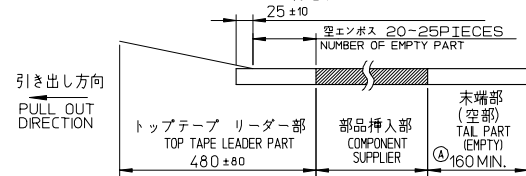①. 製品詳細寸法については図面 RSD/SD-502066-***を参照ください。
RE DETAILED DIMENSION, SEE RSD/SD-502066-***.2. 梱包数量 : 2000個/リール
NUMBER OF CONNECTORS : 2000PCS/REEL3. リードテープ長さ
LEAD TAPE LENGTH

4. 材料

MATERIAL

キャリアテープ : ポリプロピレン

CARRIER TAPE : POLYPROPYLENE

トップテープ : PET/PE

TOP TAPE : PET/PE

リール : PS<リサイクル材を含む>

REEL : POLYSTYRENE <RECYCLE MATERIAL CONTAINED>

502066-***93 MODEL NO.

DESIGN UNITS
METRICTHIRD ANGLE
PROJECTION

REVISED EC NO: J2007-2306 DRAWN: YKOBAYASHI 02/2007/02/10 CHKD: 2007/02/13 APPR: HIRATA 2007/02/15	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE --	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	±	DRAWN BY YKOBAYASHI 02	DATE 2005/12/14	TITLE 0.5 FPC CONN ZIF (E/O) EMBSTP PKG (HGT=2.5) -LEAD FREE-			
		10 OVER 30 UNDER	±---	CHECKED BY HIRATA	DATE 2005/12/14				
		30 OVER	±---	APPROVED BY MSASAO	DATE 2005/12/14				
		REV	DESCRIPTION	ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		SD-502066-002		1 OF 2	
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

