

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[5031493000](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

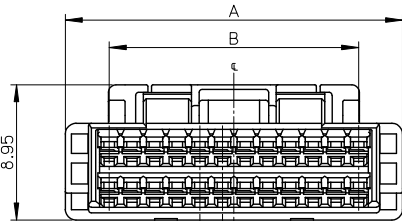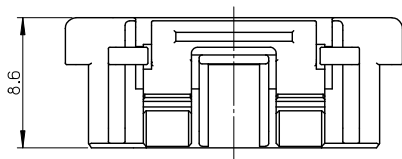

10CKTのロック形状
FIGURE OF 10 CIRCUIT



8CKTのロック形状
FIGURE OF 8 CIRCUIT

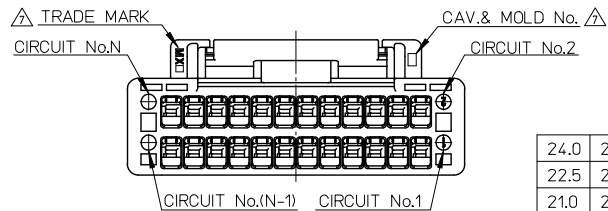

24.0	29.8	△ 503149340*	34
22.5	28.3	503149320*	32
21.0	26.8	503149300*	30
19.5	25.3	503149280*	28
18.0	23.8	503149260*	26
16.5	22.3	503149240*	24
15.0	20.8	503149220*	22
13.5	19.3	503149200*	20
12.0	17.8	503149180*	18
10.5	16.3	503149160*	16
9.0	14.8	503149140*	14
7.5	13.3	503149120*	12
6.0	11.8	503149100*	10
4.5	10.3	503149080*	8
B	A	MATERIAL AND ORDER No. △	CIRCUIT No.

GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		4:1	METRIC		
REVISED	EC NO: J2015-0528	DRAWN: TAKA KE	CHKD: KASAKAWA	0.25	UNDER	±0.03	DRAWN BY	DATE	TITLE
				0.25	OVER	±0.05			
				0.5	UNDER	±0.1			
				0.5	OVER	±0.2			
				1.0	UNDER	±0.25			
				10	OVER	±0.3			
H	2014/10/23	CHKD: KASAKAWA	APPR: NIKITA	ANGULAR		±1 *	MATERIAL NO.	DATE	DOCUMENT NO.
				DRAFT WHERE APPLICABLE		MUST REMAIN			
				WITHIN DIMENSIONS					
				SIZE		A3			
				SEE TABLE					
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX					
REV	2015/02/16	CHKD: KASAKAWA	APPR: NIKITA	INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SD-503149-001	1 OF 2	SHEET NO.

10 9 8 7 6 5 4 3 2 1

NOTES

1. 材料 PBT UL94V-0
MATERIAL
- ④ 2. 適合相手: 503148, 503154, 505406 シリーズ
MATE WITH: 503148, 503154, 505406 SERIES
3. 適合ターミナル: 502579, 503429 シリーズ
APPLICABLE TERMINAL: 502579, 503429 SERIES
- △ 4. 極数/2=偶数極の場合に適用
APPLY FOR (CIRCUIT/2=EVEN)
- △ 5. 製品番号
MATERIAL No.

503149 - **0*

極数 色
CIRCUIT SIZE COLOR

COLOR	黒 BLACK	赤 RED	青 BLUE	緑 GREEN	ベージュ BEIGE (NATURAL)
COLOR No.	1	2	4	6	0

6. 本製品のプラスチック部に黒点・白点等が確認される場合や
色合いが異なる場合がありますが、製品性能に問題はありません。
THERE IS NO INFLUENCE IN THE PRODUCT PERFORMANCE THOUGH
THE BLACK AND WHITE SPOT ETC. MIGHT BE CONFIRMED TO THE PLASTIC
PART OF THIS PRODUCT AND THE SHADE MIGHT BE DIFFERENT.
- △ 7. トレードマーク:Mプラス 2文字の製造工場を示すアルファベットにて表示。
(但し、"J"はJAPANを、"L"はMALAYSIAを示す。(例 MXJ 又はMXL))
金型番号: アルファベット1文字にて表示。(例 1A, 12A, 1B, 12B)
FORMED BY M AND FROM 1 TO 2 MORE LETTER OF ALPHABET
WHICH MEAN THE MANUFACTORY
(BUT "J" MEANS JAPAN, "L" MEANS MALAYSIA (TO TRADE MARK))
(e.g. MXJ OR MXL)
AND BY 1 - 2 DIGIT NUMBER (TO CAVITY NO.)
AND BY 1 LETTER OF ALPHABET (TO MOLD NO.)(e.g. 1A, 12A, 1B, 12B)."
8. アプリケーション仕様書 (コネクタ取扱説明書): AS-503149-001
APPLICATION SPECIFICATIONS (CONNECTOR MANUAL): AS-503149-001
9. 製品仕様書: PS-503148-001 / PS-503154-001
PRODUCT SPECIFICATION: PS-503148-001 / PS-503154-001
10. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT
△ 11. 34極品の色対応はベージュと黒色のみとなります。
A COLOR OF 34CKT. IS ONLY BEIGE AND BLACK.

REVISED EC NO: J2015-0528 DRAWN: TAKAIKE CHKD: ASAKAWA APPR: NUKITA 2014/10/23 2015/02/16 2015/02/16	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		0.25 UNDER		±0.03	DRAWN BY	DATE	TITLE 1.5 W/B CONN. DUAL PLUG HOUSING molex		
		0.25 OVER	0.5 UNDER	±0.05	T. HANYU	2008/1/8			
		0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE			
		1.0 OVER	10 UNDER	±0.2	K. ASAKAWA	2008/1/8			
		10 OVER	30 UNDER	±0.25	APPROVED BY	DATE			
		30 OVER		±0.3	YQ. ITO	2008/1/8	DOCUMENT NO. SD-503149-001		
		ANGULAR ±1 °			MATERIAL NO.			SHEET NO. 2 OF 2	
					SEE SHEET1				
		REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
				SIZE A3					

9 8 7 6 5 4 3 2 1